



Trava Ceiling

Sonus Wood

Tegular

Hook & Saddle

Lay-in

Sonus Wood acoustics are designed to seamlessly cover larger surface areas simply, beautifully, and most importantly, functionally. Transforming simple walls and ceilings into stunning ambient or accent additions, that also solve a space's sound challenge, has never been easier. Other wood systems require additional acoustic materials, large holes or gaps, and sub-walls. Trava and Aoudi are different, they are the acoustic panel, no extra work or products required. And thanks to our close partnership with Jacaranda Sanfoot, Sonus Wood can be matched and sequenced across millwork, MDF, and direct to drywall veneer.

Say bye-bye to fiberboard.

24"
23"

Welcome to the next generation of wood panels. The noise canceling acoustic core adds function, updated materials are eco-friendly and dramatically reduce weight, and installation is simpler. Only the great look of the old panels remains.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

Product Name	Trava Ceiling
Content	Premium wood veneer, MDF, and an acoustical core with 56% recycled materials
Thickness	1"
Sizes	2'x2' and 2'x4'
Tolerance	1/16"
Weight	1.5lbs per sq ft
Edges	Square and edgebanded
Sound Performance	ASTM C423-17 NRC: 0.80
Fire Performance	Class B
Variations	Slight and consistent variations in color and woodgrain should be expected when using this material. Slight imperfections are within normal manufacturing tolerances and not visible in standard installations.
Environmental	Panels consume a quarter of the natural resources and have a dramatically lower carbon footprint compared to equivalent millwork.
Maintenance	Vacuum to remove any loose dirt or dust. A damp cloth or compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a soap and water solution or Murphy's Oil soap.
Warranty	5 years
Unit of Sale	Per sq. ft.

Price



Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:
1) We got nothing to hide.
2) We are here for you.

TRAVA TEGULAR - ELEVATION

• SCALE - 1:4

1 5/16"


1 1/4"

ATTACHMENT FLA

1 1/4" TRAVA PANEL


Construction & Hardware

Tegular

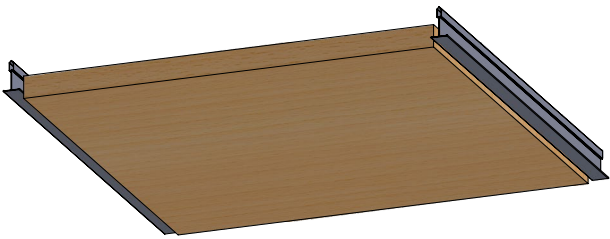


TRAVA TEGULAR - PLAN

- ATTACHMENT FLANGE
- 18 ga FORMED STEEL

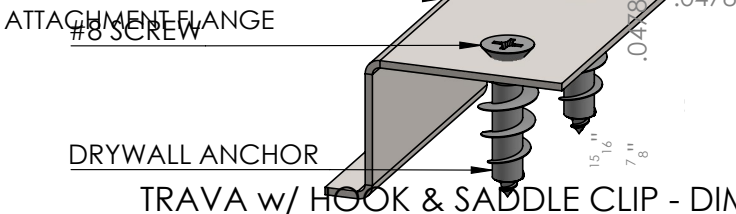

Hook and Saddle Clip

- TRAVA TEGULAR - BOTTOM DIMETRIC
- SCALE - 1:4

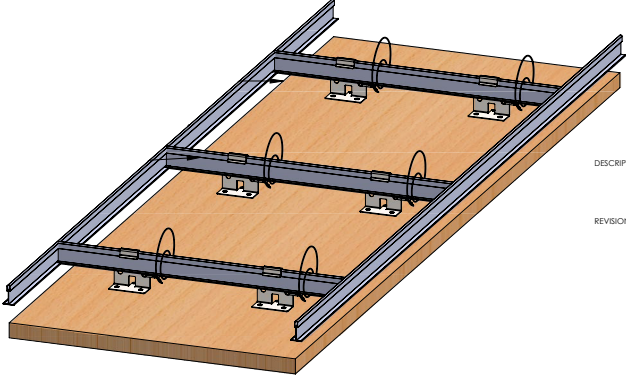

FORMED STEEL ATTACHMENT

- SCALE - 1:1


DESCRIPTION: Trava Panel
- 1.25" x 23" x 23"
- 18 ga (0.0478") Formed Steel
- STD Screw Attch
- .5625" T-Grid

REVISIONS:
REV 1 - 6/14/22
REV 2 - 6/16/22
REV 3 - 8/25/22
SCALE 1:4


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SONUS NORTH AMERICA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SONUS NORTH AMERICA IS PROHIBITED.

FILE NAME: 2.07-1-001
DATE: 8/25/2022
JOB #: 2-2.07
SHEET 1 OF 3

OUR STUDIO | design

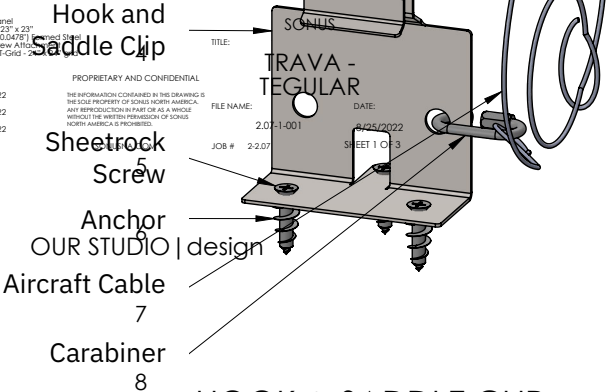

Lay-in

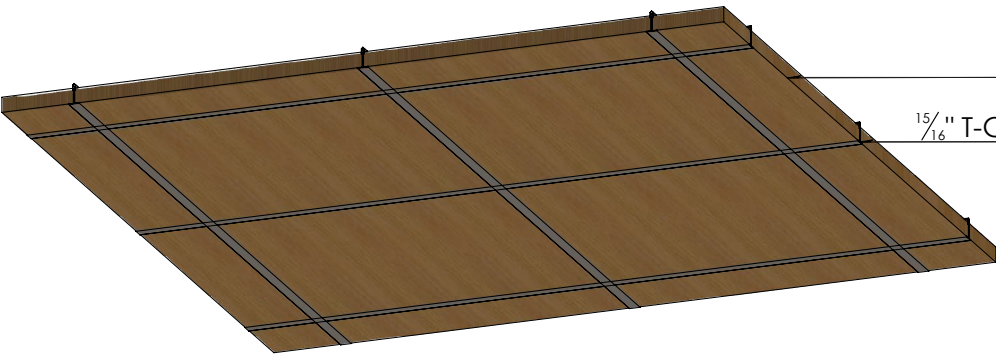

TRAVA PANEL

15/16" T-GRID 24" ON CENTER

Color & Finishes



One in a Million


Sonus offers over one hundred veneers, custom staining, and sequencing to meet the needs of any project.

Proudly partnering with



Test Results

Absorption Coefficient vs. Freq (Hz)

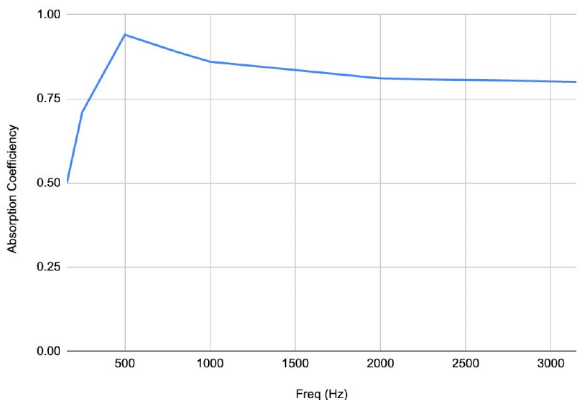

Freq (Hz)	Absorption Coefficient
160	0.50
250	0.71
500	0.94
800	0.89
1000	0.86
2000	0.81
3150	0.80
NRC	0.83

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F Mounting as defined by ASTM E795 using two pieces of 0.5 in aluminum stock bar placed on floor to lift material with trim pieces to simulate a typical wall installation with mounts.