


The sonus logo is displayed in a bold, black, sans-serif font. The letter 'o' is stylized with a horizontal rainbow gradient bar passing through its center.

Rockin' Roll

Felt Baffle



Rockin' Roll can be described in one word: calm. The flowing lines, the single slab construction, and of course the acoustic properties to wash away all distractions. It's our version of sitting in a big rocking chair on a cool summer day or gently rolling along in a brand new boat. And if we do our jobs correctly, with our instant consultations and super speedy lead times, you might just get to take the day off to enjoy some of that serenity.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

Product Name	Rockin' Roll
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Size	96" x 96" x 11.5"
Baffle Centers	6", 8", 12"
Weight	.5/lbs per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.80
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per Unit

Price





Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.

Sonus creates the perfect experience for each person in any moment.



Design

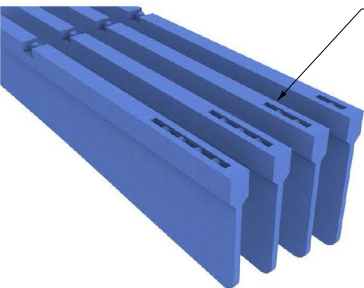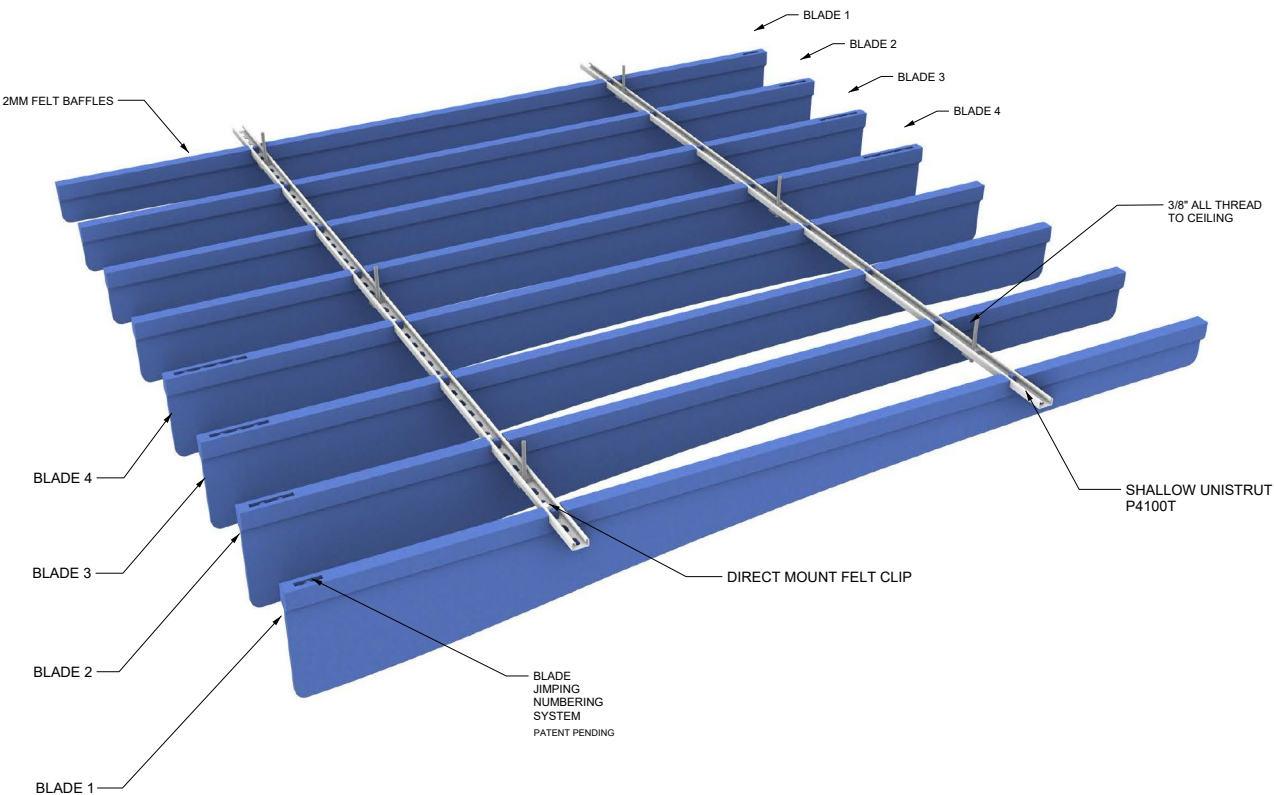

CUSTOM CUT JUMPING SEEN ONLY FROM THE TOP EASILY IDENTIFIES THE BLADE NUMBER PATENT PENDING





EXAMPLE:
FLIP BLADES END FOR END
EACH TIME BLADE 4 REPEATS
TO ACHIEVE THE "SEA SAW"
CONFIGURATION

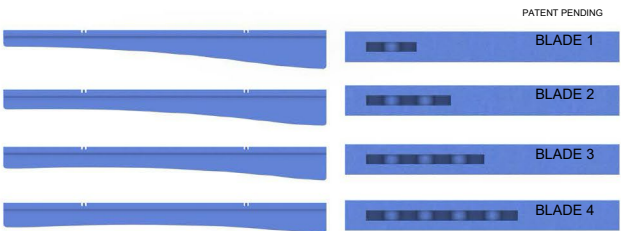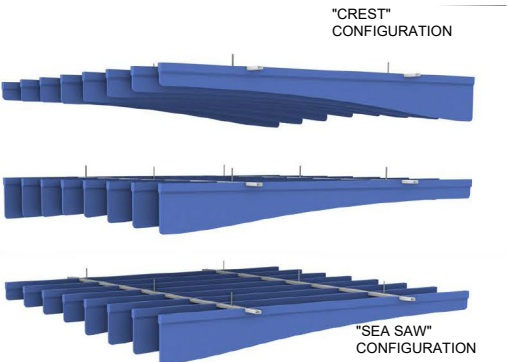


Design





Sea Saw

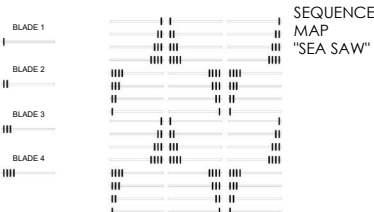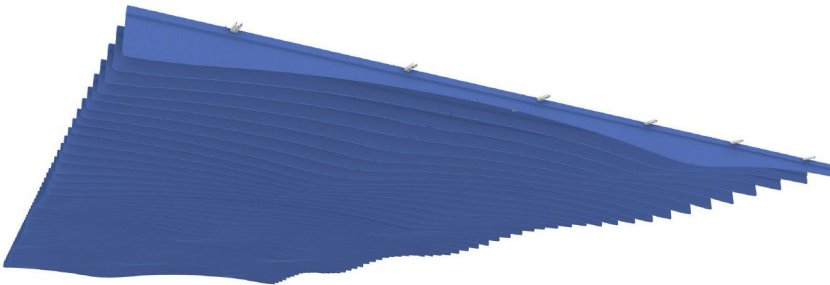

Justified

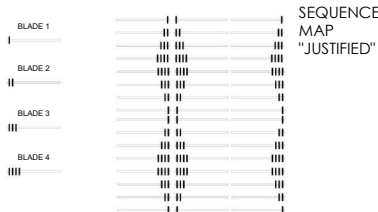


Crest

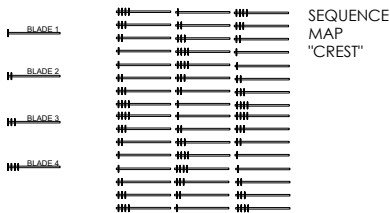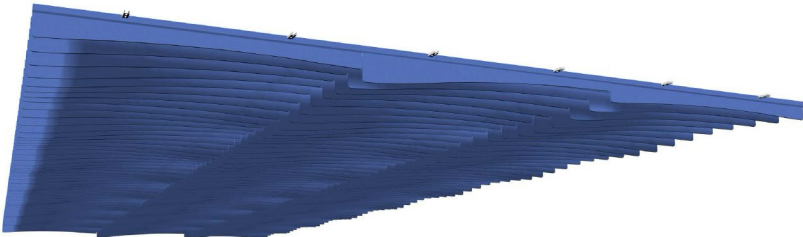

Test Results



Absorption Coefficiency vs. Freq (Hz)

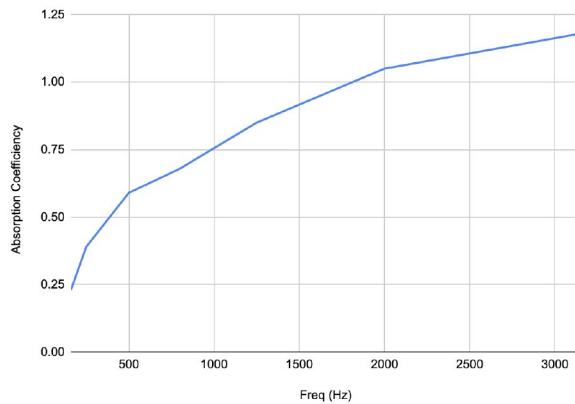

Freq (Hz) Absorption Coefficiency

160	0.23
250	0.39
500	0.59
800	0.68
1250	0.85
2000	1.05
3150	1.18
NRC	0.80

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type J Mounting - using 4 baffle units suspended with aircraft wire. 12" oc to simulate a typical baffle installation.