




Rib It

Felt Panel



Complexity, involved, and intricate are easy. Simplicity is hard. Rib It makes it look simple but features a number of thoughtful executions, making advanced design and installation simple. Each channel is beveled on all sides for more seamless panel-to-panel mating, the rhythmic lines create more perceptual space, in-field trimming takes seconds, and our new Feltware install system reduces the need for hardware.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

| | |
|-------------------|---|
| Product Name | Rib It |
| Content | 100% Polyester (PET) with a minimum of 60% recycled content |
| Felt Thickness | 12mm |
| Size | 24" x 48" & 24" x 96" |
| Product Thickness | 2" |
| Weight | .75/lbs per sq ft |
| Edge Options | Exposed felt |
| Sound Performance | ASTM C423-17: NRC = 0.75 |
| Fire Performance | Product made from Class A PET felt material tested under ASTM-84 |
| Variations | Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations. |
| Maintenance | Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution. |
| Warranty | 10 years |
| Unit of Sale | Per Unit |

Price





Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.


Sonus creates the perfect experience for each person in any moment.

Design & Installation

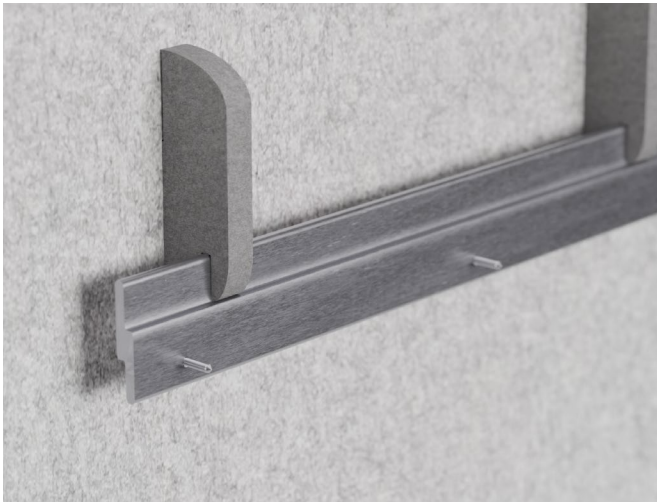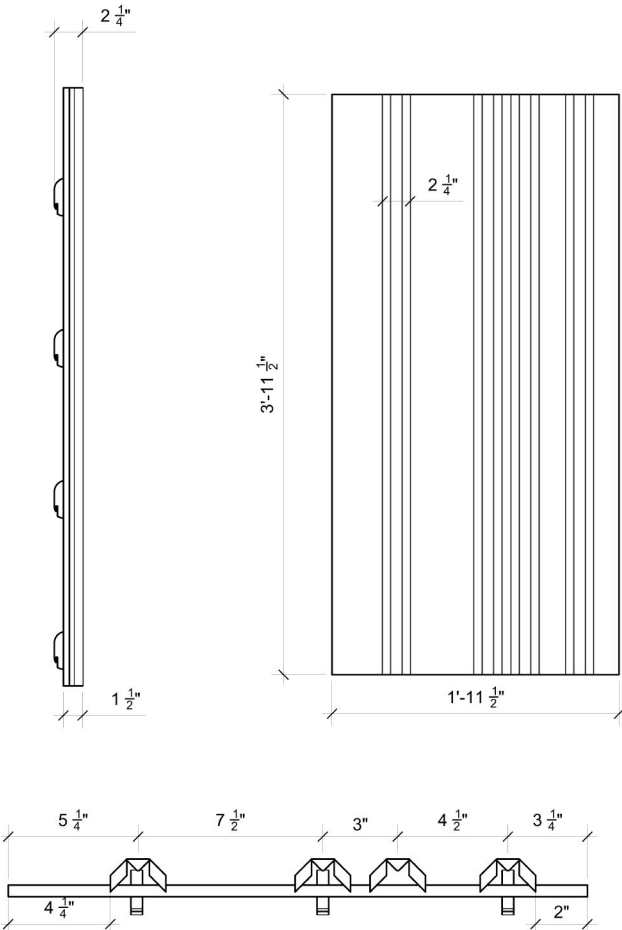

Test Results

Absorption Coefficient vs. Freq (Hz)

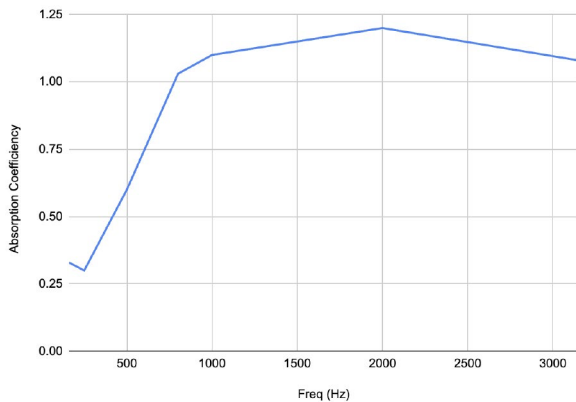

| Freq (Hz) | Absorption Coefficient |
|-----------|------------------------|
| 160 | 0.33 |
| 250 | 0.30 |
| 500 | 0.60 |
| 800 | 1.03 |
| 1000 | 1.10 |
| 2000 | 1.20 |
| 3150 | 1.08 |
| NRC | 0.80 |

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F20 Mounting - Tested specimen mounted with Z bar and designed airspace behind it to simulate a standard wall installation.