



Waffle Iron & Mini Iron

Felt Baffle

Nobody waffles on Waffles. They have mini pools to contain as much delicious syrup as possible, genius! Oh, you want to hear about Waffle Iron? Sorry, It is also genius. Flat-packed for cost-effective and eco-friendly shipping, it is built on-site and suspended in a matter of minutes. Coming in 16 colors, Waffle Iron is as delicious for the soul as a maple syrup drenched, piping hot, perfectly cooked, stack of waffles.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



Specifications

Product Name	Waffle Iron or Mini Iron
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Diameter	95.5" or 47.5"
Height	7.5"
Weight	23.4 lbs or 8.6 lbs
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.71
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per unit

Price



Snap the QR Code or visit sonusna.com to see pricing.


Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.

Sonus creates the perfect experience for each person in any moment.


Construction & Hardware

Clevis and Cable Gripper

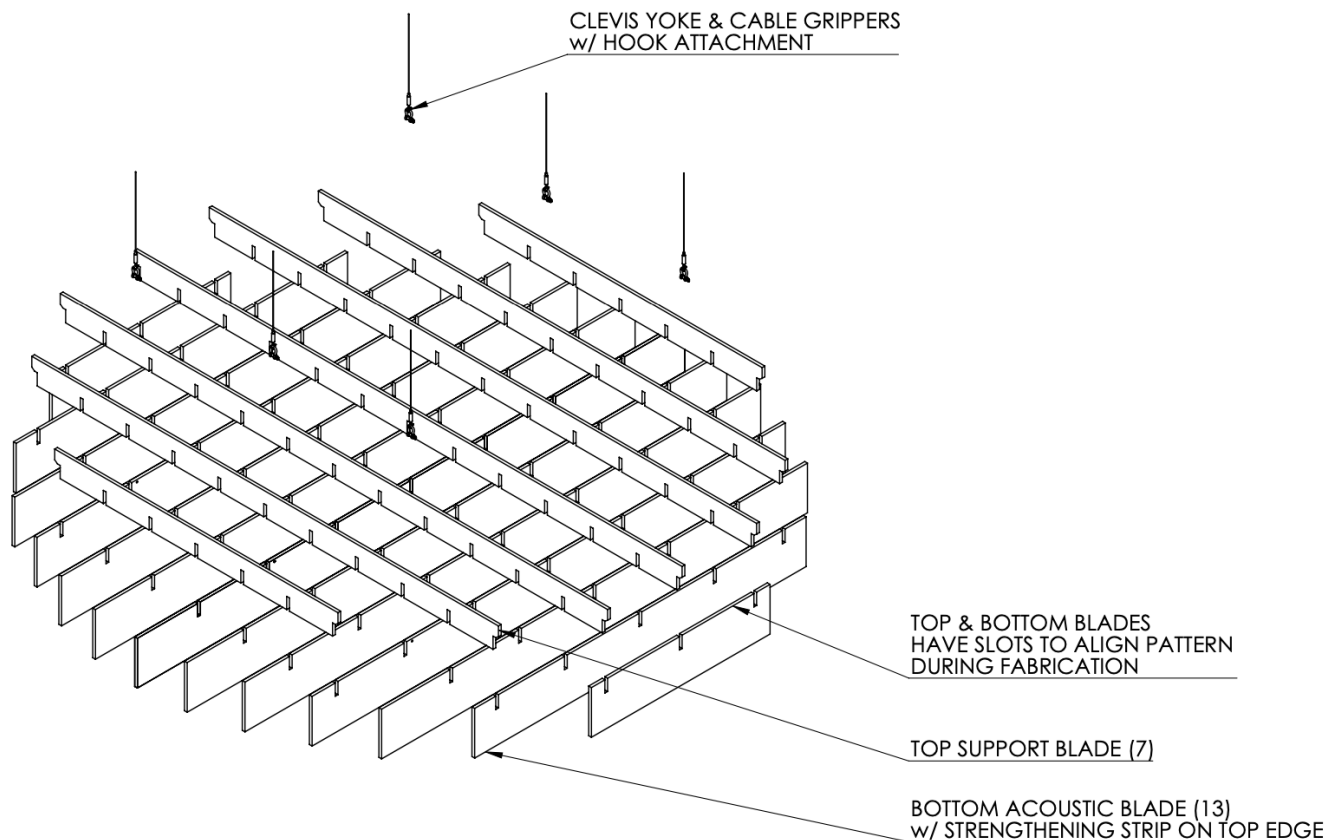

Test Results

Absorption Coefficient vs. Freq (Hz)

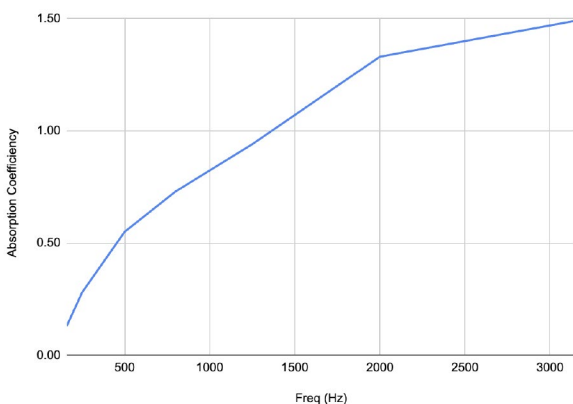

Freq (Hz)	Absorption Coefficient
160	0.13
250	0.28
500	0.55
800	0.73
1250	0.94
2000	1.33
3150	1.49
NRC	0.78

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250,500, 1250 & 2000 Hz).

ASTM C 423-17: Type J Mounting – using 2 cloud units suspended with aircraft wire to simulate a typical cloud installation.