



Shape Shift Reveal

Felt Panel

Shape Shift Reveal uncovers a new spin on standard felt panels. The top layer is routed out to reveal a different color underneath, providing subtle yet intriguing visual interest to your space. The installation? The world's easiest panel installation: Sonus Peel n Stick. Need to cancel even more noise or want a smaller amount of panels? We're a step ahead. Shape Shift has the ability to use our panel standoffs to significantly increase the NRC value.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X
FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

| | |
|-------------------|---|
| Product Name | Shape Shift Reveal |
| Content | 100% Polyester (PET) with a minimum of 60% recycled content |
| Thickness | 24mm |
| Size | 23.5" x 23.5" |
| Weight | .7 lbs/per sq ft |
| Edge Options | Exposed felt |
| Sound Performance | ASTM C423-17: NRC = 0.50 |
| Fire Performance | Product made from Class A PET felt material tested under ASTM-84 |
| Variations | Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations. |
| Environmental | Low VOC emissions, formaldehyde and phenol-free. Red List free. |
| Maintenance | Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution. |
| Warranty | 10 years |
| Unit of Sale | Per unit, minimum order quantity: 8 |

Price





Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.

Sonus creates the perfect experience for each person in any moment.


Designs

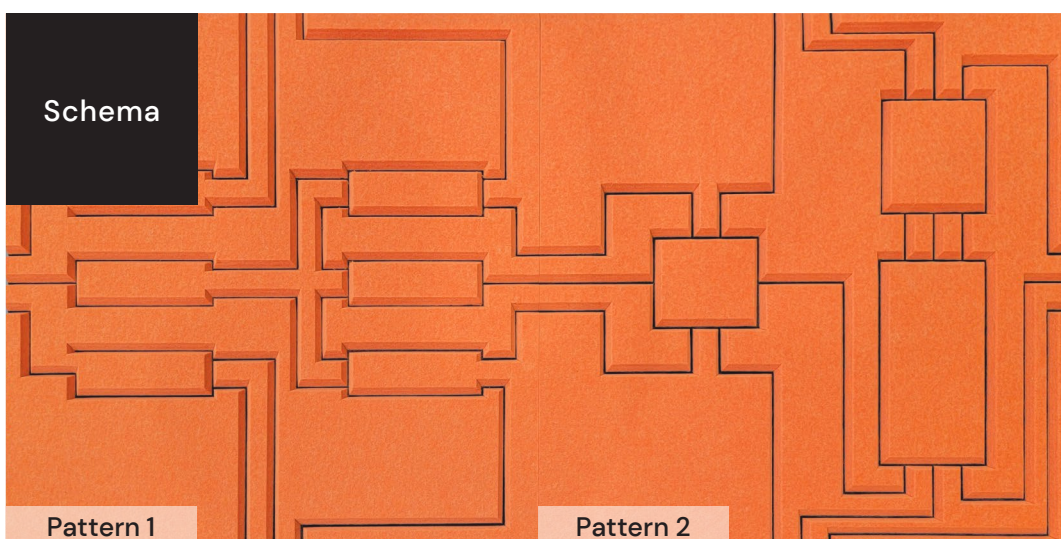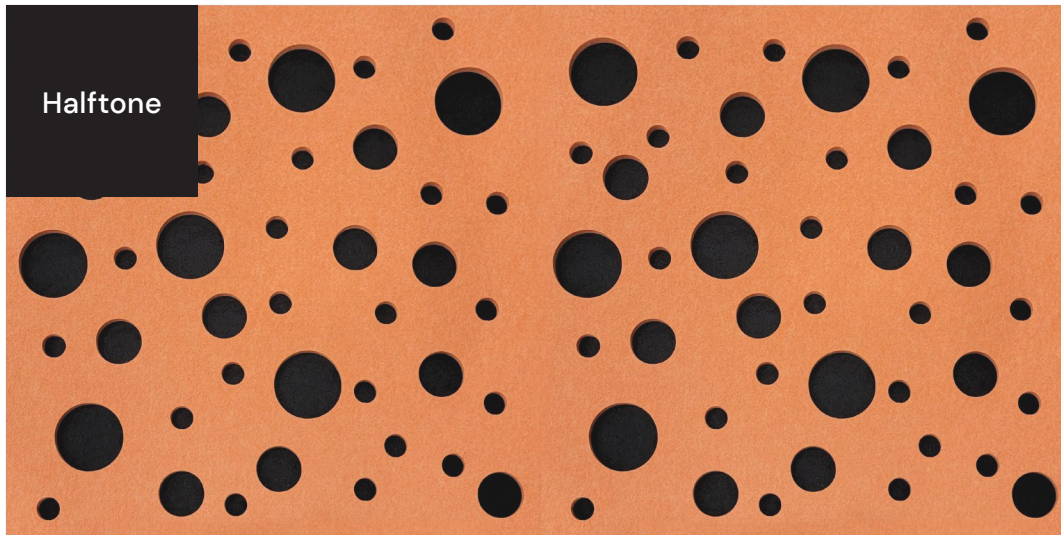

Installation

Sonus Peel n Stick for the easiest installation or contractor supplied construction adhesive.

Test Results

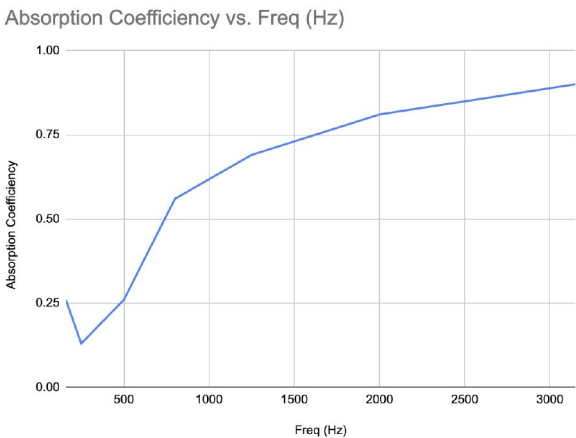

| Freq (Hz) | Absorption Coefficiency |
|-----------|-------------------------|
| 160 | 0.26 |
| 250 | 0.13 |
| 500 | 0.26 |
| 800 | 0.56 |
| 1250 | 0.69 |
| 2000 | 0.81 |
| 3150 | 0.90 |
| NRC | 0.50 |

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type A Mounting – Test specimen laid directly against the test to simulate a typical wall installation.