

Olino



Felt Baffle

Sonus Felt

Products as adaptable and good-looking as you are.

Sonus Felt is where acoustic performance meets expressive form. Designed for clarity, made to last, and endlessly shapeable — this is sound softened with intention. From bold palettes to sculpted geometry, every product balances sustainability, durability, and design freedom in equal measure.

Specifications

Product Name	Olino
Content	Recycled felt wrapped aluminum perforated cylinder filled with a high sound absorption acoustic material
Thickness	Diameter: Nominal 8"
Length	48", 96"
Weight	2.4lbs per linear ft
Sound Performance	.95–1.70
Fire Performance	Class A materials
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per unit

Price




Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:


- 1) We got nothing to hide.
- 2) We are here for *you*.

Construction & Hardware

Suspension: Cable Gripper (Male)

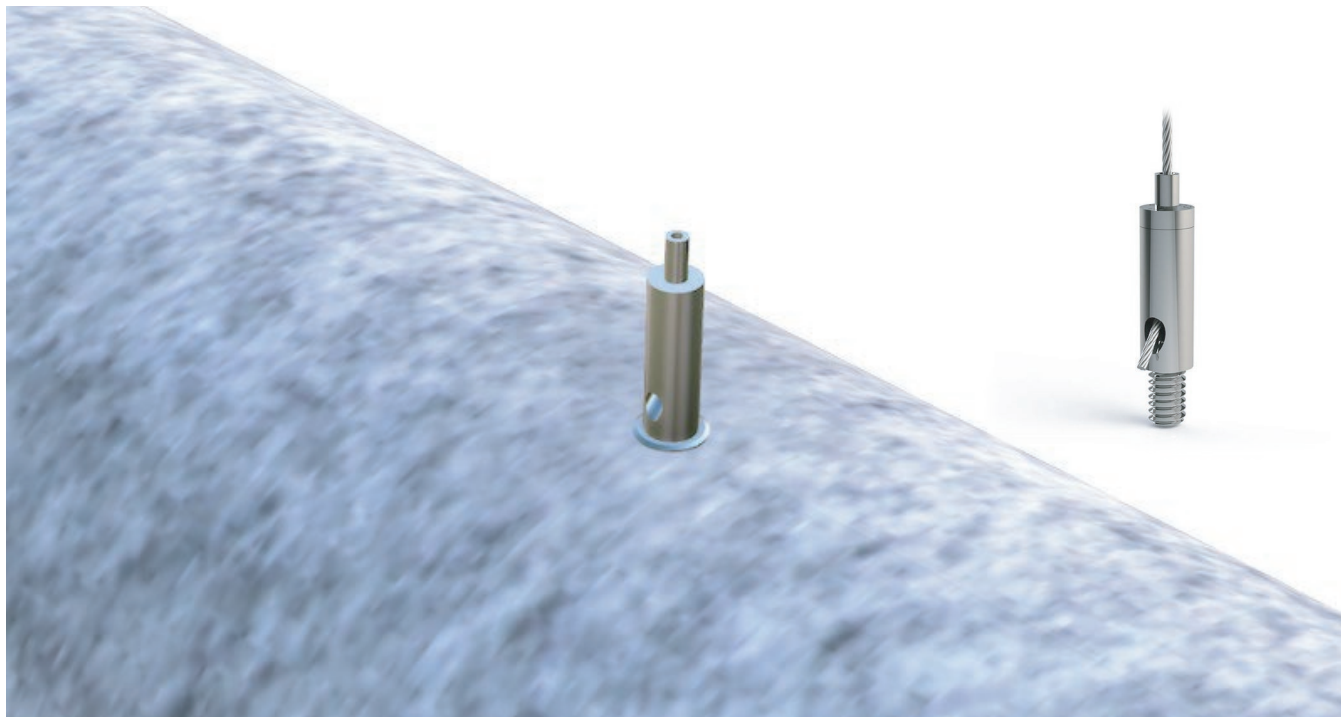


Direct to Ceiling Grid: Twist Clip

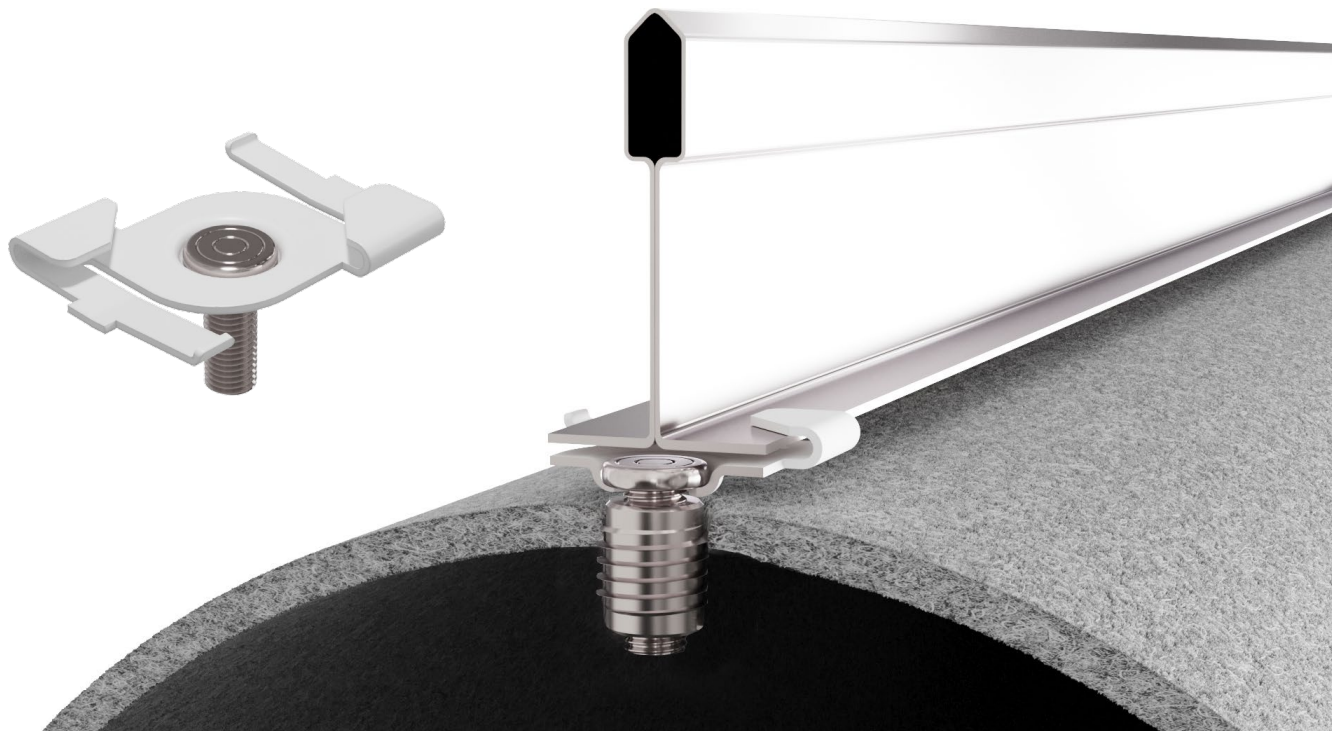

Colors



Test Results

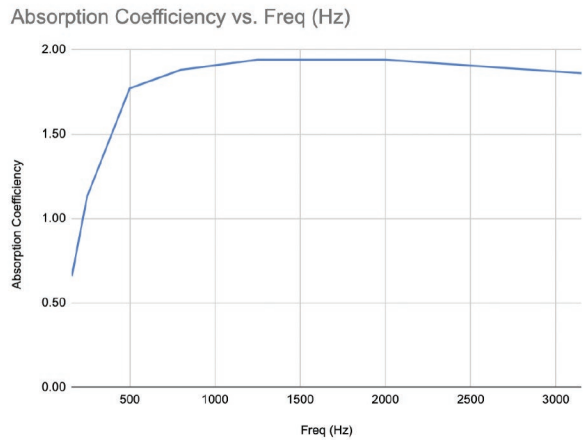

Freq (Hz)	Absorption Coefficient
160	0.66
250	1.13
500	1.77
800	1.88
1250	1.94
2000	1.94
3150	1.86
NRC	1.70

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F610 Mounting using 10 units suspended to simulate a typical baffle installation in grid.