

The Sonus logo is positioned in the top right corner of the image. It features the word "sonus" in a bold, lowercase, sans-serif font. The letter "o" is stylized with a horizontal rainbow gradient bar passing through its center.

Truss Me



Felt Baffle

Sonus Felt

Adaptable Acoustics for Sophisticated Specifiers

Sonus Felt is where acoustic performance meets expressive form. Designed for clarity, made to last, and endlessly shapeable — this is sound softened with intention. From bold palettes to sculpted geometry, every product balances sustainability, durability, and design freedom in equal measure.

Specifications

Product Name	Truss Me
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Length	47.5", 59.5", 71.5", 95.5"
Height	7.5", 11.5"
Weight	.34/lbs per sq ft
Edge	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.80
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per baffle

Price



Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for you.

Specifications






Environmental

- Minimum 60% post-consumer recycled PET (third-party certified)
- 100% recyclable material composition
- Formaldehyde: Not detected
- Ultra-low VOC emissions (near-zero TVOC)
- Free of:
 - SVHCs (>0.1%)
 - Heavy metals & restricted substances (RoHS)
- Select products utilize mechanical joinery construction, eliminating the need for adhesives and enabling monomaterial recyclability
- Reduced reliance on chemical adhesives supports improved indoor air quality
- EPD-backed lifecycle transparency (ISO 14025 / ISO 21930)
- Designed for long service life (~30 years)

Certifications

- **GREENGUARD Gold Certified® (UL 2818)**
Certified for low chemical emissions supporting indoor air quality
- **OEKO-TEX® STANDARD 100 – Product Class I**
Tested for harmful substances and safe for direct human contact
- **Environmental Product Declaration (EPD) – UL Verified**
Lifecycle assessment providing environmental impact transparency
- **SCS Recycled Content Certified (≥60% post-consumer PET)**
Third-party verified recycled material content
- **Red List Compliant (LBC Framework)**
Free of chemicals of concern per Living Building Challenge criteria
- **REACH SVHC Compliant**
No Substances of Very High Concern above regulatory thresholds
- **RoHS Compliant**
Free of restricted heavy metals and hazardous substances
- **ASTM E84 – Class A Fire Rating**
Meets stringent fire performance requirements for interior materials

Details

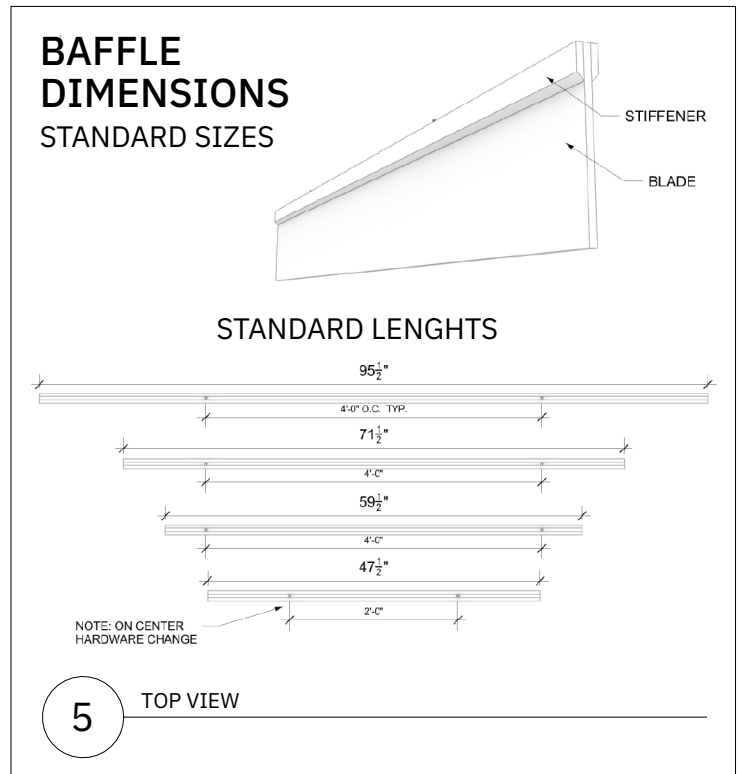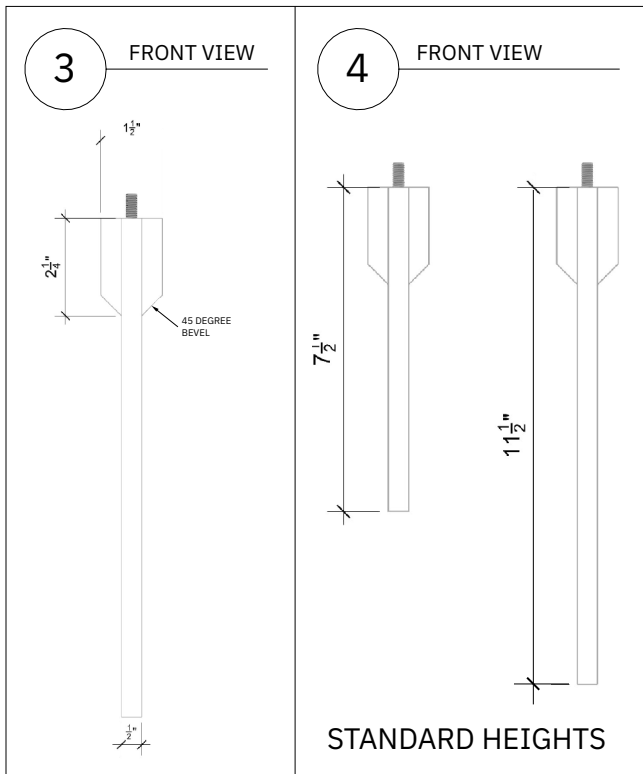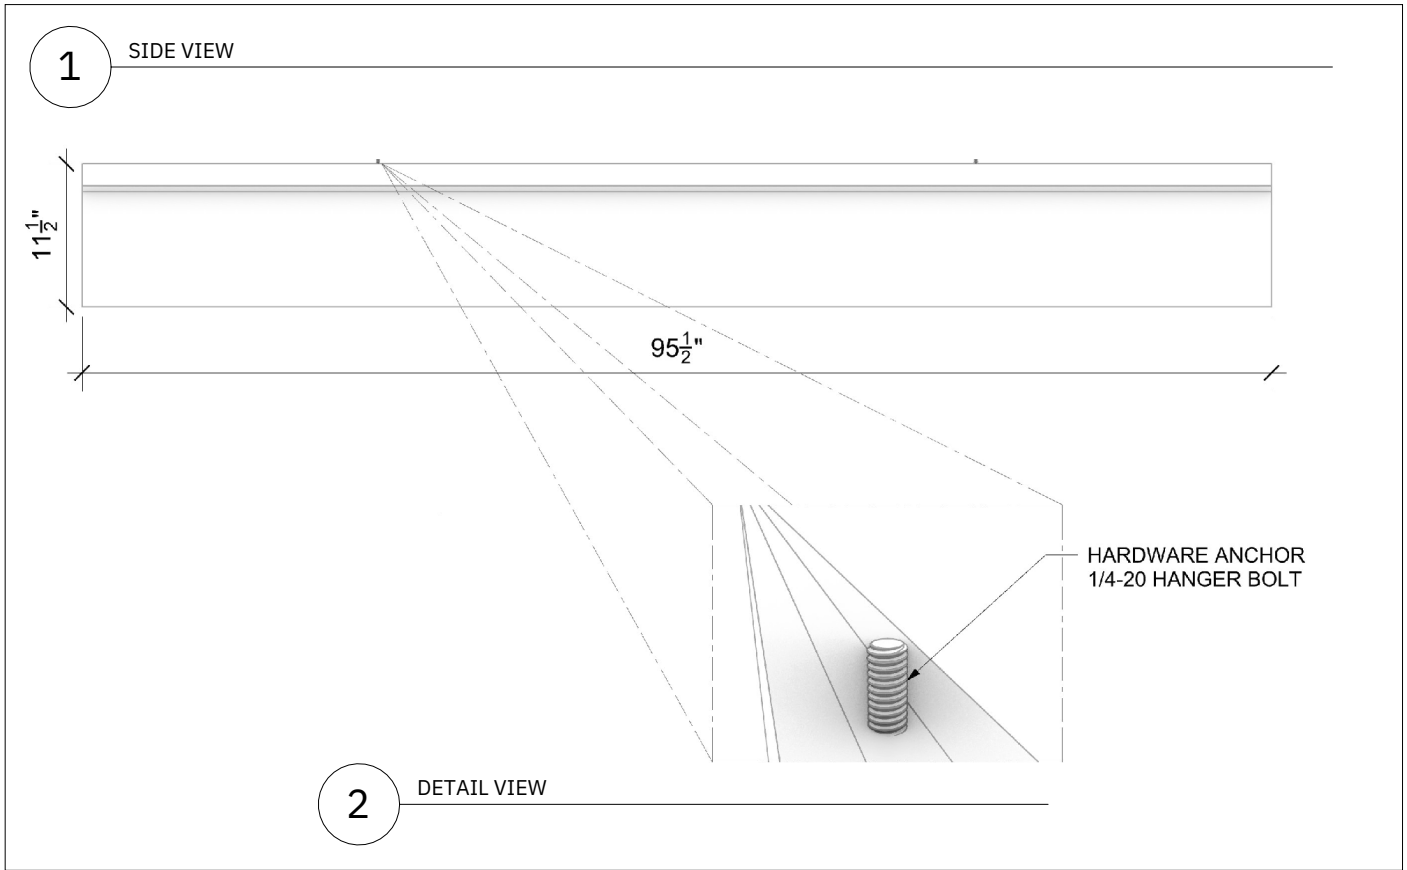


Design & Installation

DIRECT MOUNT UNISTRUT INSTALL




INCLUDED HARDWARE PER BAFFLE:

2x 1/4-20 NUTS
4x FENDER WASHERS




HANGER BOLT AND BOTTOM NUT COME PRE-INSTALLED ON BAFFLE

UNISTRUT AND CEILING HARDWARE PROVIDED BY OTHERS

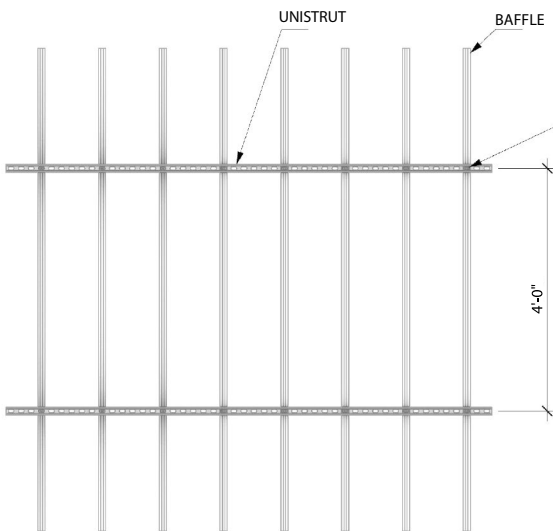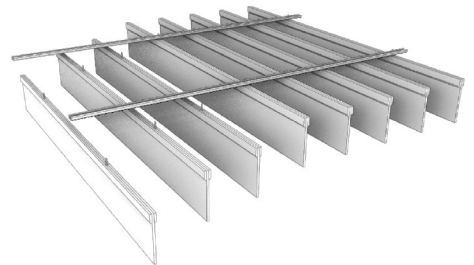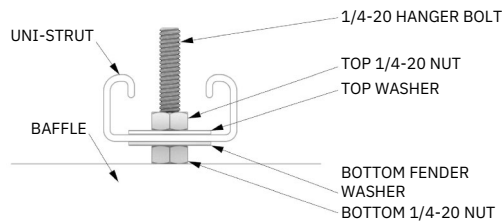


4' O.C. TYP. HARDWARE


18-30" BAFFLES 1' O.C.
31-54" BAFFLES 2' O.C.
55-96" BAFFLES 3' O.C.




ON CENTER SEQUENCE BETWEEN BAFFLES MUST ALIGN WITH PRE-EXISTING SLOTTED HOLES IN UNISTRUT MINIMUM OF 4" O.C. IN 2" INCREMENTS



1
PLACE BOTTOM WASHER ON HANGER BOLT THEN INSERT THROUGH UNI-STRUT SLOT



2
INSTALL TOP WASHER AND THREAD TOP NUT ONTO HANGER BOLT




3
TIGHTEN TOP NUT TO SECURE BAFFLE

Design & Installation

CABLE GRIPPER INSTALL INCLUDED HARDWARE PER BAFFLE:


2x female cable grippers are included with each baffle





Note:
Ceiling hardware and 1/16" aircraft wire normally provided by others unless otherwise stated.




STEP ONE
Pre-install 1/16" aircraft cable onto ceiling in desired location and pattern.

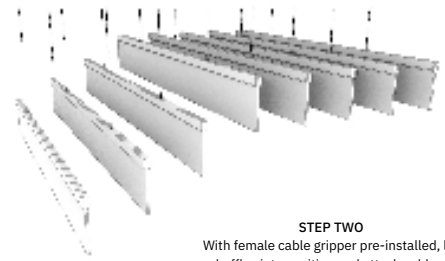


STEP TWO
With female cable gripper pre-installed, lift baffles into position and attach cables.



Thread female cable gripper on hanger bolt.




Depress spring lock to install aircraft cable.




Baffle can be raised by pulling on aircraft cable.

Spring lock will auto hold the height of baffle.



Baffle can be lowered by depressing spring lock then slide aircraft cable up to adjust height.

Release spring lock to hold in place.




Release spring lock in final position.

Cut any excess cable to hide from below.

Test Results



Absorption Coefficient vs. Freq (Hz)

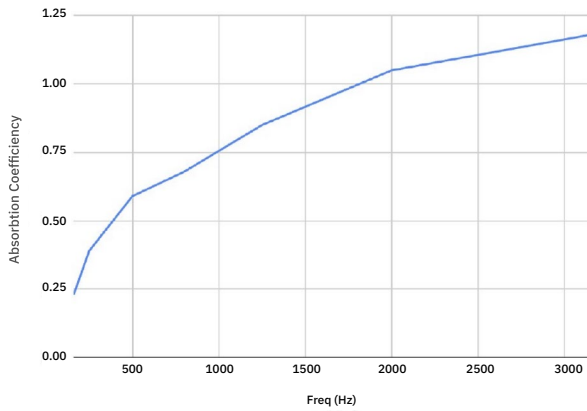

Freq (Hz)	Absorption Coefficient
160	0.23
250	0.39
500	0.59
800	0.68
1250	0.85
2000	1.05
3150	1.18
NRC	0.80

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F Mounting as defined by ASTM E795 using two pieces of 0.5 in aluminum stock bar placed on floor to lift material with trim pieces to simulate a typical wall installation with mounts.