



sonus

Aoudi Linear

Sonus Wood

Sonus Organics

With Nature. For People. By Sonus.

A collection born from the belief that natural materials and modern performance belong together. Sonus Organics harnesses nature's own relentless design to create acoustics that are as healthy — for people and planet — as they are beautiful.

Specifications

Product Name	Aoudi Linear
Content	Premium wood veneer, MDF, and an acoustical core with 56% recycled materials
Thickness	1"
Width	Section: 18.5", Planks: 5.5", Reveals: .5"
Length	95.75" and 47.75"
Tolerance	1/16"
Weight	1.5lbs per sq ft
Edges	Square and edgebanded
Sound Performance	ASTM C423-17 NRC: 0.80
Fire Performance	Class B
Variations	Slight and consistent variations in color and woodgrain should be expected when using this material. Slight imperfections are within normal manufacturing tolerances and not visible in standard installations.
Maintenance	Vacuum to remove any loose dirt or dust. A damp cloth or compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a soap and water solution or Murphy's Oil soap.
Warranty	5 years
Unit of Sale	Per carton

Price



Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for you.

Specifications




Environmental

- Designed as a lower-impact alternative to traditional millwork systems
- Veneer production yields up to 3× more material per log, reducing resource consumption
- Responsibly sourced wood supports sustainable forest management practices
- Recon veneer options replicate rare or exotic species without depleting natural resources
- Core materials contain high recycled glass content
- Available with formaldehyde-free, low-emitting core options
- Manufactured in the USA
- Contributes to acoustic comfort and noise reduction
- Materials tested for fire performance, mold resistance, and moisture durability


Certifications

- Designed as a lower-impact alternative to traditional millwork systems
- Veneer production yields up to 3× more material per log, reducing resource consumption
- Responsibly sourced wood supports sustainable forest management practices
- Recon veneer options replicate rare or exotic species without depleting natural resources
- Core materials contain high recycled glass content
- Available with formaldehyde-free, low-emitting core options
- Manufactured in the USA
- Contributes to acoustic comfort and noise reduction
- Materials tested for fire performance, mold resistance, and moisture durability

Details

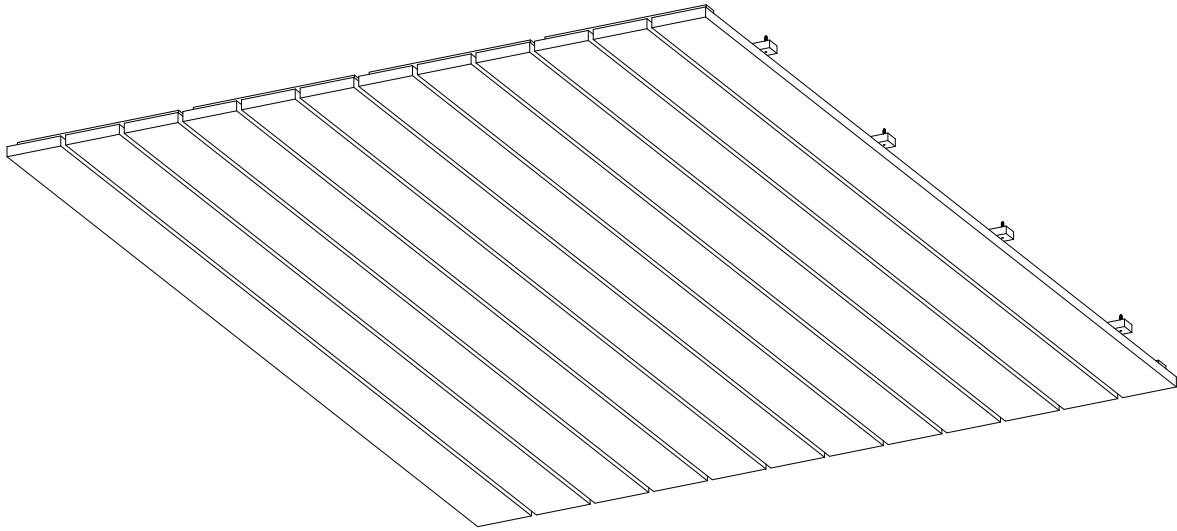


1 WOOD PLANKS w/ BATTENS
4 ASSEMBLIES

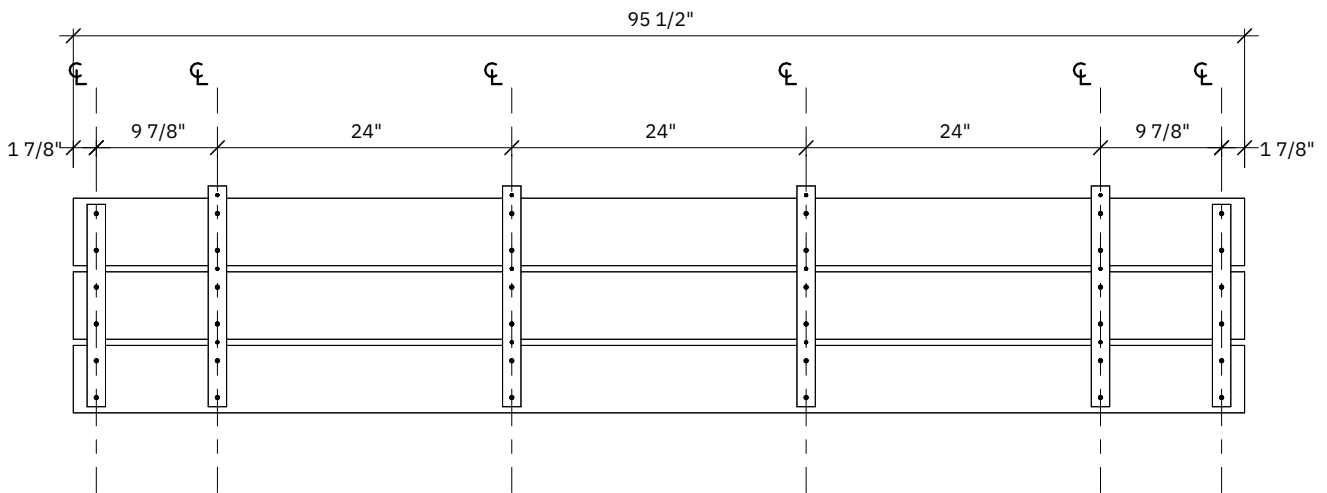

2 PLANKS w/ BATTENS BOARDS - PLAN
SINGLE ASSEMBLY









Hardware and Installation

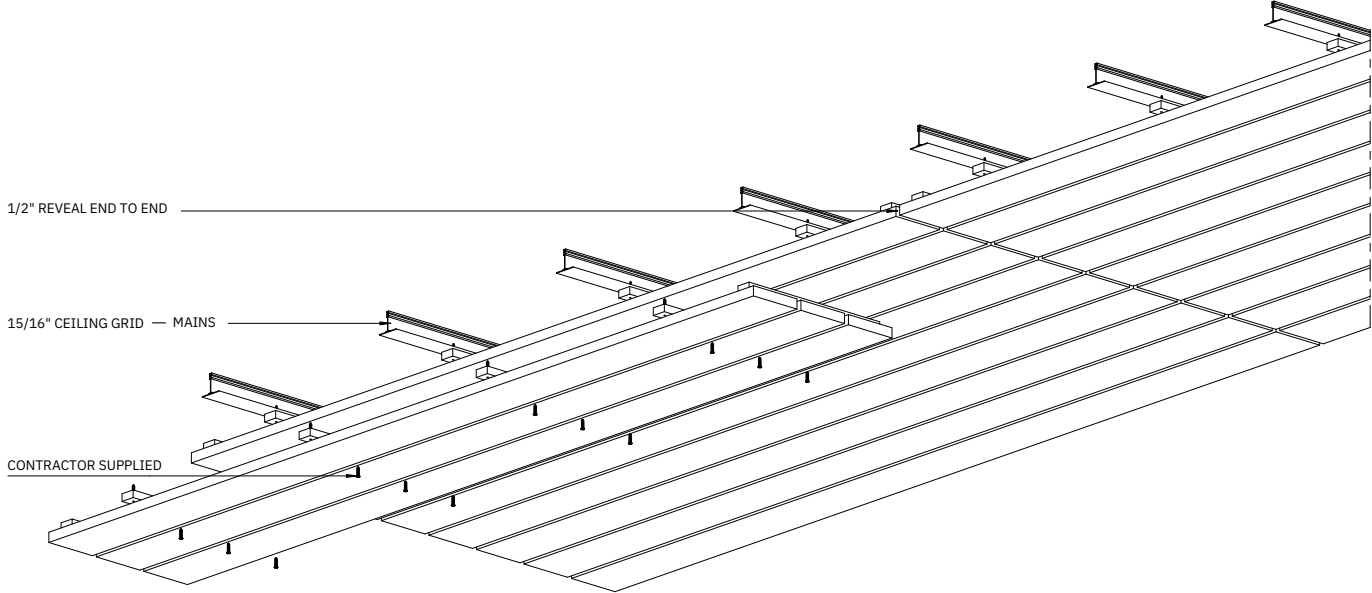


1 PLANKS w/ BATTENS - ATTACHMENT
7 ASSEMBLIES

Colors and Finishes

Naturals



Recons




One in a Million

Sonus offers over one hundred veneers, custom staining, and sequencing to meet the needs of any project.



Test Results

Absorption Coefficient vs. Freq (Hz)

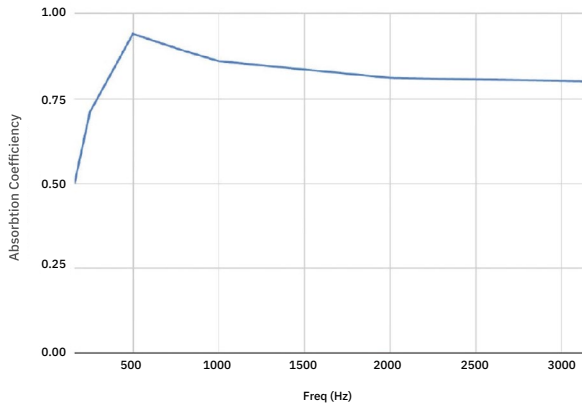

Freq (Hz) Absorption Coefficient

160 0.50

250 0.71

500 0.93

800 0.88

1250 0.85

2000 0.81

3150 0.80

NRC 0.80

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F Mounting as defined by ASTM E795 using two pieces of 0.5 in aluminum stock bar placed on floor to lift material with trim pieces to simulate a typical wall installation with mounts.