Product Information

Article number: 4000012

ATF 600 US

Automatic Transmission Fluid

DESCRIPTION

DEUTSCHÖL ATF 600 US covers a wide range of possible applications, especially for vehicles from American manufacturers. Suited for life time application (please observe manufacturer's instructions) in automatic gear boxes, hydrostatic drives and power steering units.

THIS PRODUCT IS RECOMMENDED BY DEUTSCHÖL IF THE FOLLOWING FILLING REQUIREMENTS ARE REQUIRED:

Dexron VI, Dexron III, Dexron II	(100°C Viscosity by Dexron III level adjusted)
Allison	C4, TES-295, TES-353, TES-389
Chrysler / Dodge / Jeep	ATF +, +2, +3, +4 AS68RC ATF, MB 236.12, P/N 05127382AA P/N 68043742AA, P/N 68157995AA. SP-III
Ford / Lincoln / Mercury	P/N XT-10-QLV [LV], P/N XT-2-QDX [M] P/N XT-2-QSM [Syn], P/N XT-5-QM or – DM [V] P/N XT-6-QSP or – DSP [SP], P/N XT-8-QAW [Premium] P/N XT-9-QMM5 [FRN5], WSS-M2C922-A1
GM / GMC / Opel / Saturn	Dexron VI, III H, III G, II E, II D, II, Type A Suffix A, Asian AW-1 P/N 12378515 [Synthetic], P/N 19 40 700/767 P/N 21005966 Transaxle, P/N 22717466 P/N 88863400/401, P/N 88900925 P/N 9985010 [PSF], P/N 9986195, T-IV

TYPICAL CHARACTERISTICS

Properties	Testing according	Data	Unit
Density at 15°C	DIN 51757	0,849	g/ml

Product Information

Made in Germany

Article number: 4000012

Pourpoint	DIN ISO 3016	< -45	°C
Viscosity at 40 °C	DIN 51562	34	mm²/sec
Viscosity at 100 °C	DIN 51562	6,95	mm²/sec
Viskosity Index	DIN ISO 2909	170	

AVAILABLE PACKAGING



Item-number:.	4000012-1	4000012-4	4000012-5	4000012-20

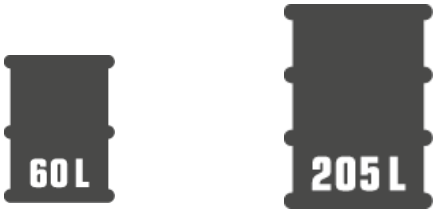

Item-number:	4000012-60	4000012-205

The information in this product data sheet is based on years of experience of our team and our partners. Our professional competence in the development and manufacturing of lubricants are based on the current state-of-the-art. Universally valid statements regarding the function of our lubricants are not possible, because the lubricant performance can be influenced by a series of factors. As a result, the lubricant filling process, the exact purpose of use, the general operating conditions, the system degree of wear and the system contamination etc. must be taken into account in particular in engines, machinery and equipment. The data given in this product data sheet represents general, non-binding guideline values. No warranty expressed or implied is given concerning the properties. We recommend to consult our team regarding the application conditions and requirements before the DEUTSCHÖL lubricant is used. The user should test the functional suitability of our lubricants in the intended application and use the product with the corresponding care and responsibility according to the manufacturer's specifications. Our products undergo continuous improvements. We therefore reserve the right to change our product program, the products and their manufacturing processes as well as all details at any time and without warning.
Please note: Our products may not be used in aircraft and spacecraft or parts thereof.