


KE1079B

CUTOUT SWITCH COVER - LOAD BREAK 15KV & 27KV

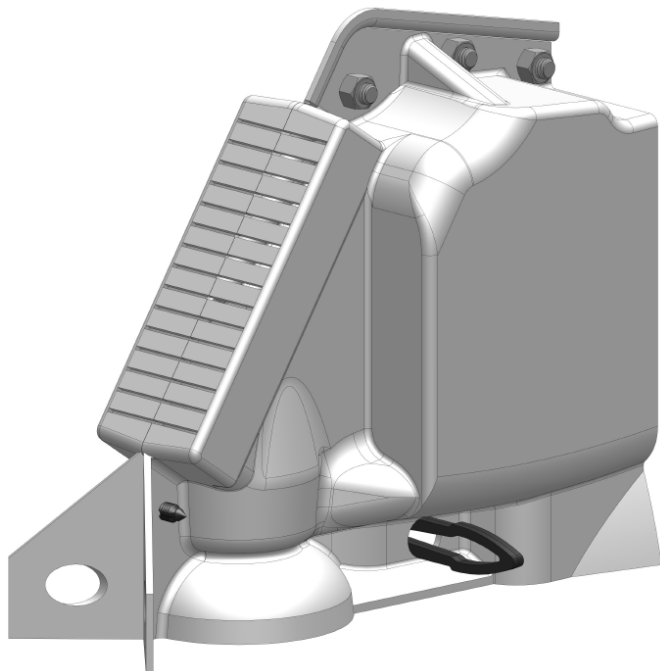

WHY KADDAS

ADAPTABLE EGRESS FOR VARIOUS JUMPER WIRE ANGLES

LOCKING PIN PROVIDES SECURE, LONG TERM COVER SOLUTION



RUS APPROVED

IEEE 1656 & ASTM TESTED

V-0 FLAMMABILITY CLASSIFICATION

UV RESISTANT

Birdguard™ Products Deliver a Triple Win

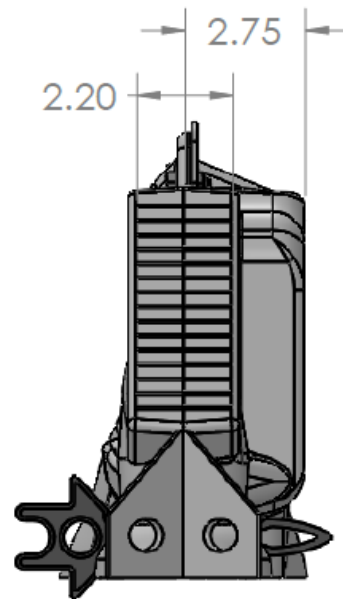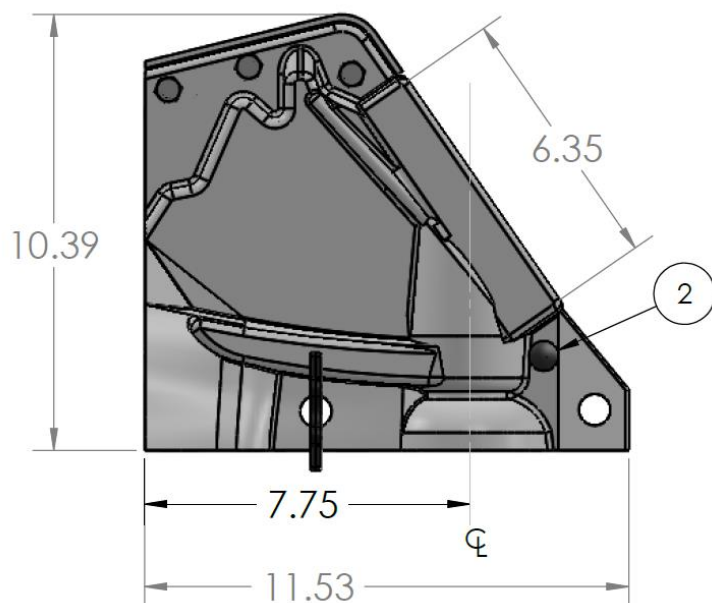

MATERIAL TESTING INFORMATION

ASTM TEST	DESCRIPTION	SPECIFICATIONS
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 9 (TESTED IN OIL)	1000 V/ MIL
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN AIR)	PASS > 72KV Ph to ground
COMPARATIVE TRACKING INDEX	D-3638-12	PASS > 600 V
TENSILE STRENGTH	D-638-10 (BEFORE EXPOSURE)	PASS 6570 PSI
TENSILE STRENGTH	D-638-10 (AFTER XENON ARC EXPOSURE)	PASS 6480 PSI
TENSILE IMPACT	D-1822-13 (BEFORE EXPOSURE)	78.4 FT-LBS/IN SQ
TENSILE IMPACT	D-1822-13 (AFTER XENON ARC EXPOSURE)	69.3 FT-LBS/IN SQ
FLAMMABILITY	ASTM D-3801 / UL94 V0	PASS