


KE1540-01

BUSHING/TERMINAL COVER 4.5" DIA X 16"

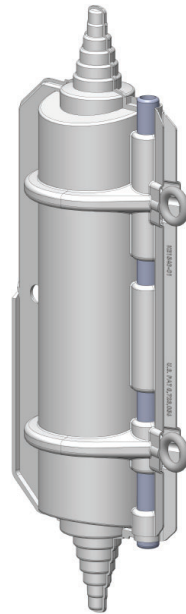

WHY KADDAS

FLANGED DESIGN HELPS PREVENT WATER INTRUSION

GRADUATED ENDS ALLOWS FOR VARIOUS CONDUCTOR SIZES

EYE BOLT FEATURE LOCKS COVER SECURELY



CAN BE INSTALLED WITH OR WITHOUT HOTSTICK

IEEE 1656 & ASTM TESTED

V-0 FLAMMABILITY CLASSIFICATION

UV RESISTANT

Birdguard™ Products Deliver a Triple Win

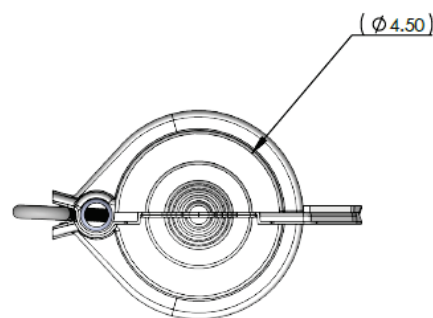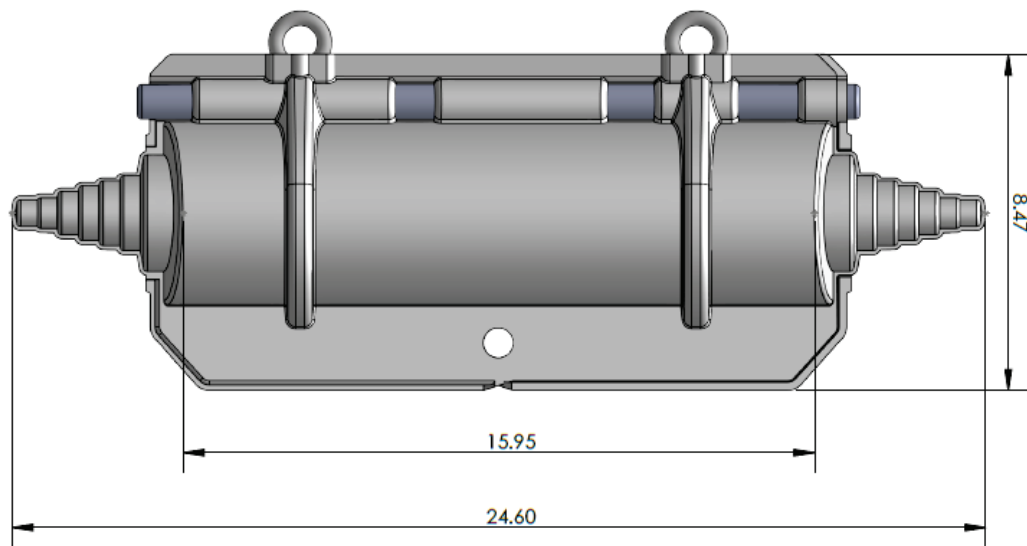

MATERIAL TESTING INFORMATION

ASTM TEST	DESCRIPTION	SPECIFICATIONS
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN OIL)	PASS > 49KV
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN AIR)	PASS > 72KV
ELECTRICAL DIELECTRIC STRENGTH	D-3638-12	PASS > 600 V
TENSILE STRENGTH	D-638-10 (BEFORE EXPOSURE)	PASS 6570 PSI
TENSILE STRENGTH	D-638-10 (AFTER XENON ARC EXPOSURE)	PASS 6480 PSI
TENSILE IMPACT	D-1822-13 (BEFORE EXPOSURE)	78.4 FT-LBS/IN SQ
TENSILE IMPACT	D-1822-13 (AFTER XENON ARC EXPOSURE)	69.3 FT-LBS/IN SQ
FLAMMABILITY	D-3801 (UL94)	PASS