
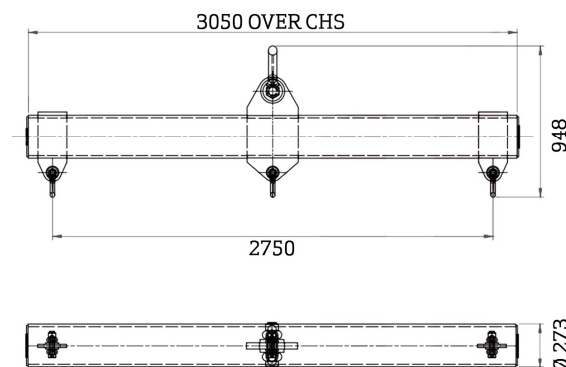


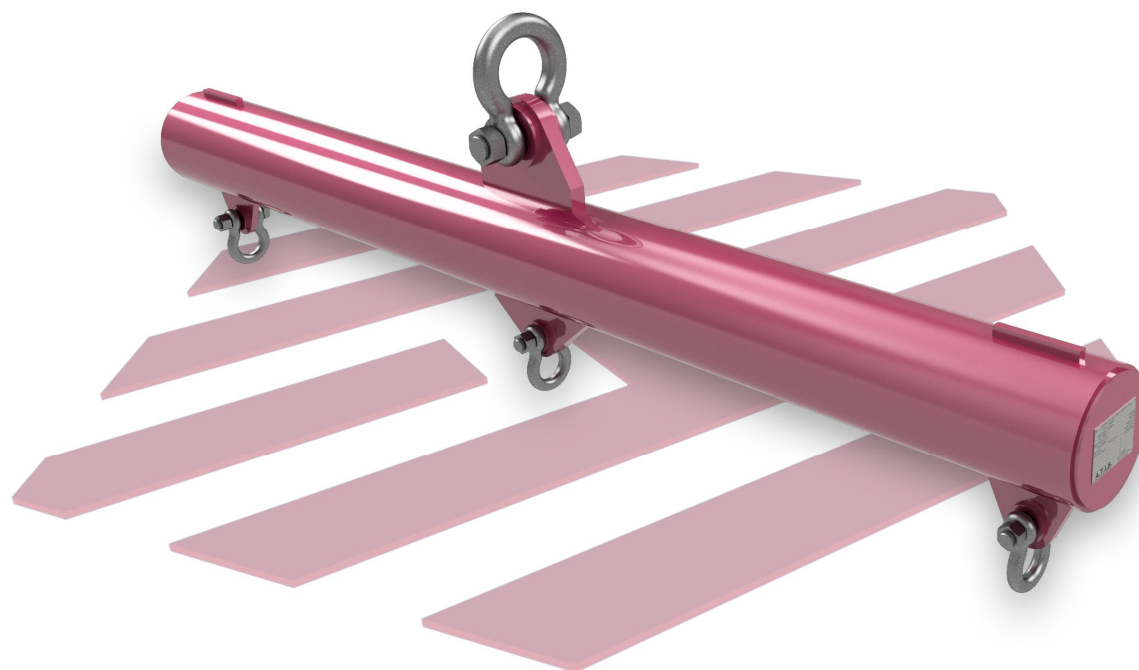

10Te SPREADER BEAM

TARE: 0.45Te PAYLOAD: 9.55Te RATING 10.0Te

- 10TE SAFE WORKING LOAD
- ANTI SNAG / BUMPER BAR DESIGN
- MULTIPLE LASHING POINTS
- SINGLE LIFT POINT
- SUPPLIED WITH FULL HIRE PACK INC. LIFTING ARRANGEMENT