



MV STAVFJORD

Administrative Details

Type of vessel	-	Self-discharger
Flag	-	Netherlands
IMO No.	-	9321380
Built	-	2005
Class	-	BV
P&I	-	North of England P&I

Vessel's Characteristics

Gross tonnage (GT)	-	4206 T
DWT	-	6500 T
Container Capacity	-	256 TEU
LOA	-	113,76 m
Beam moulded	-	14,40 m
Max summer draft	-	6,32 m
Airdraft from keel	-	28,00 m
Ice Class	-	Fin/Swe 1A
Bow thruster	-	350 kW

Class entry

1+Hull+Mach. General cargo, Containership, unreg. navigation, Heavy cargo, AUT-UMS / sys-neq

Hold Characteristics

Hold/Hatches	-	2 holds / 2 hatches
Hatch cover type	-	Pontoon
Hold dimensions	-	38,22 x 11,70 x 8,98 m / 44,48 x 11,70 x 8,98 m
Hatch cover	-	38,22 x 11,70 m / 44,48 x 11,70 m
Grain capacity	-	295,779 cbft
Moveable bulkheads	-	YES, 2 pcs
Hatch cover load	-	2 T/m ²
Tanktop load	-	15 T/m ²

Excavator Specifications


Excavator	-	Hitachi 870 LHC
Load/Discharging rate	-	Upto 700 T/hr pending commodity

All details are given in good faith, believed to be correct but without guarantee

Peak CSL Group AS

+47 55 53 52 00

chartering@peakgroup.no

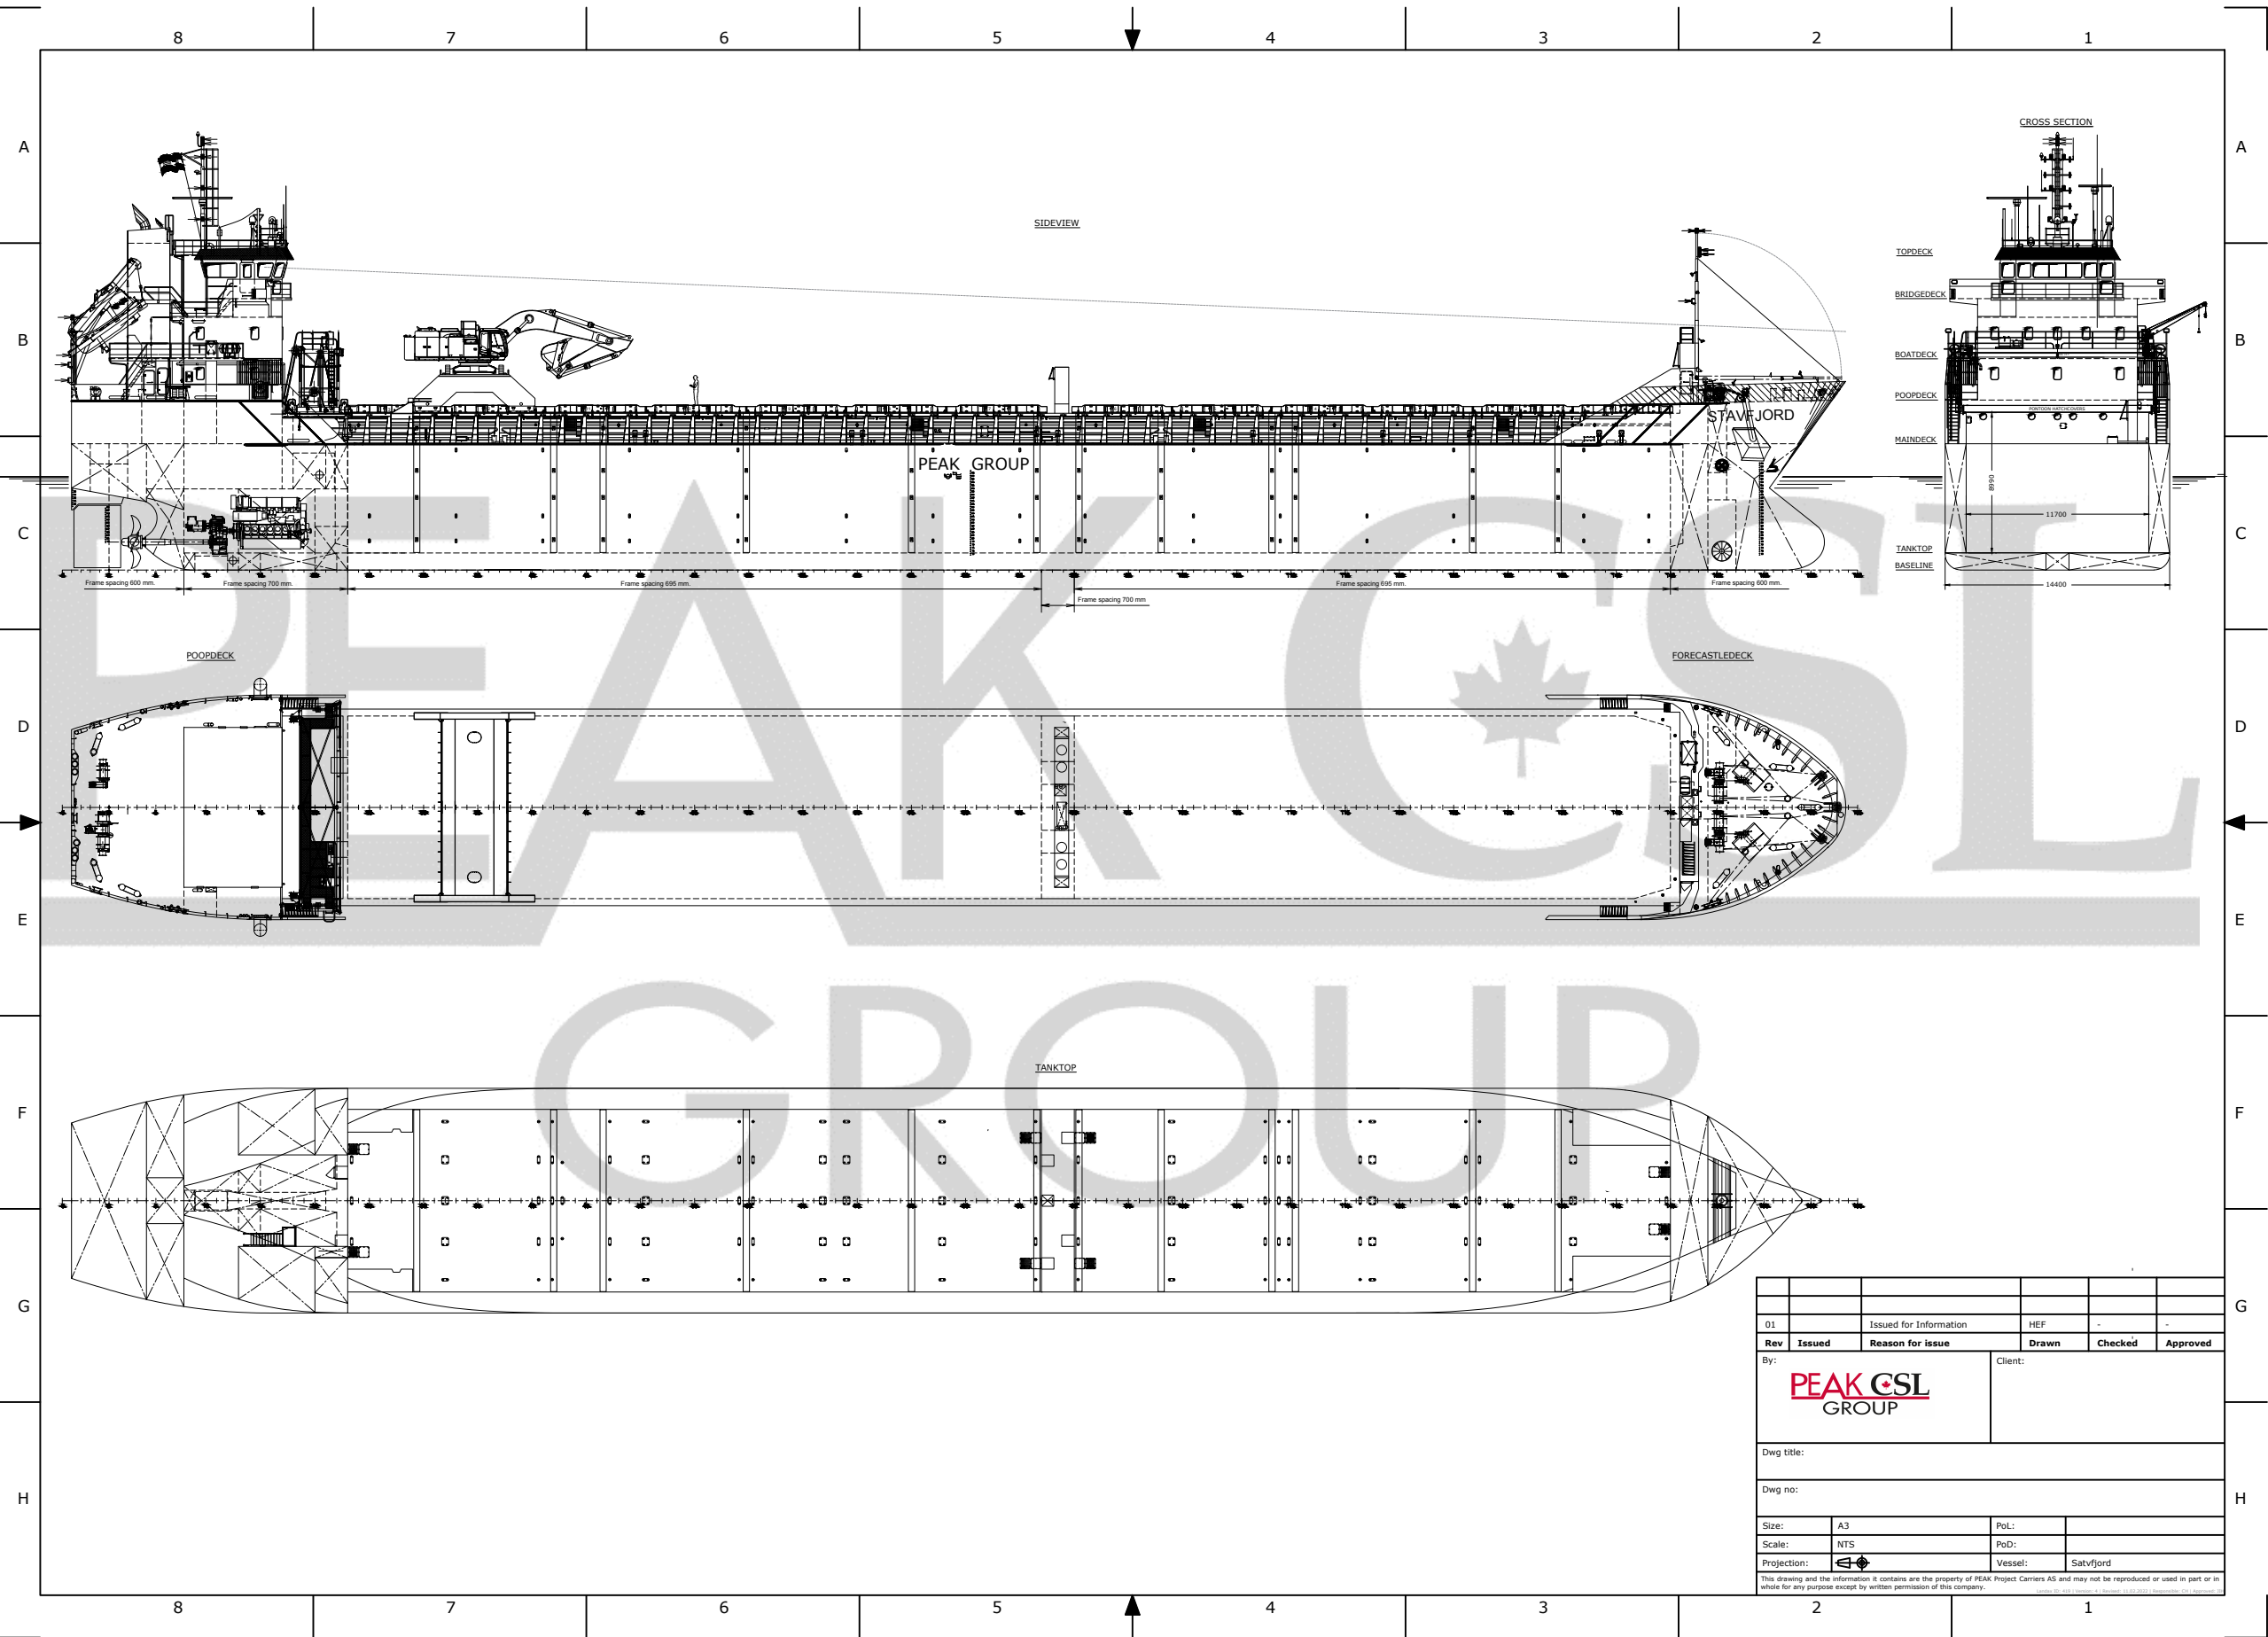

01		Issued for Information	HEF	-	-
Rev	Issued	Reason for issue	Drawn	Checked	Approved
By:			Client:		
PEAK CSL GROUP					
Dwg title:					
Dwg no:					
Size:	A3		Pol.:		
Scale:	NTS		PoD:		
Projection:			Vessel:	Satvifjord	
This drawing and the information it contains are the property of PEAK Project Carriers AS and may not be reproduced or used in part or in whole for any purpose except by written permission of this company.					