



PEAK SKARV

VESSEL NAME	BUILT	IMO NO.	Call	FLAG
PEAK SKARV 1	2026	1035246	LAYP8	NIS
PEAK SKARV 2	2026	1035258	LAYQ8	NIS
PEAK SKARV 3	2026	1035260	LAYR8	NIS
PEAK SKARV 4	2026	1035272	LAYS8	NIS

Administrative Details

Type of vessel	-	Heavy cargo/open top
Class	-	DNV
P&I	-	Gard/Skuld

Vessel's Characteristics

Gross tonnage (GT)	-	6595 T
Net tonnage (NT)	-	2516 T
DWT	-	7897 T
Container Capacity	-	150H/252D TEU
LOA	-	108,20 m
Beam (Waterline)	-	18,10 m
Beam (Extreme)	-	19,60 m
Max summer draft	-	7,00 m
Max open top draft	-	5,70 m
Airdraft Keel/Ballast	-	35,80/28,80 m
Ice class	-	1C
Freeboard open top	-	3,50 m

Class entry

DNV 1A, General dry cargo ship, Container, Open TOP sailing, Ice(1C), Clean(Tier III), ER(SCR,TIER III), Recyclable, Battery(Safety), Fuel Ready (Ammonia [D;S;P]), Strengthened(IB)

Hold Characteristics

One hold, box	-	65,25 x 13,80 x 10,30 m
One hatch	-	86,50 x 19,6 m
Hold Cubic	-	10,120 m3 / 357,385 ft3
Moveable bulkheads	-	YES, 7 positions
Tweendecks	-	12 pcs, 2 positions
Hatch/Twd load	-	3,5 T/m2
Tanktop load	-	15 T/m2
Container Stackload	-	90 / 44 T
Hold ventilation	-	6 air changes

Machinery and Systems




Thruster Fwd/Aft	-	1 x 800/600 kW
Electrical generator	-	1 x 1,840 kWe (Main) 1 x 341 kWe (Port)

All details are given in good faith, believed to be correct but without guarantee

Peak CSL Group AS

+47 55 53 52 00

project@peakgroup.no

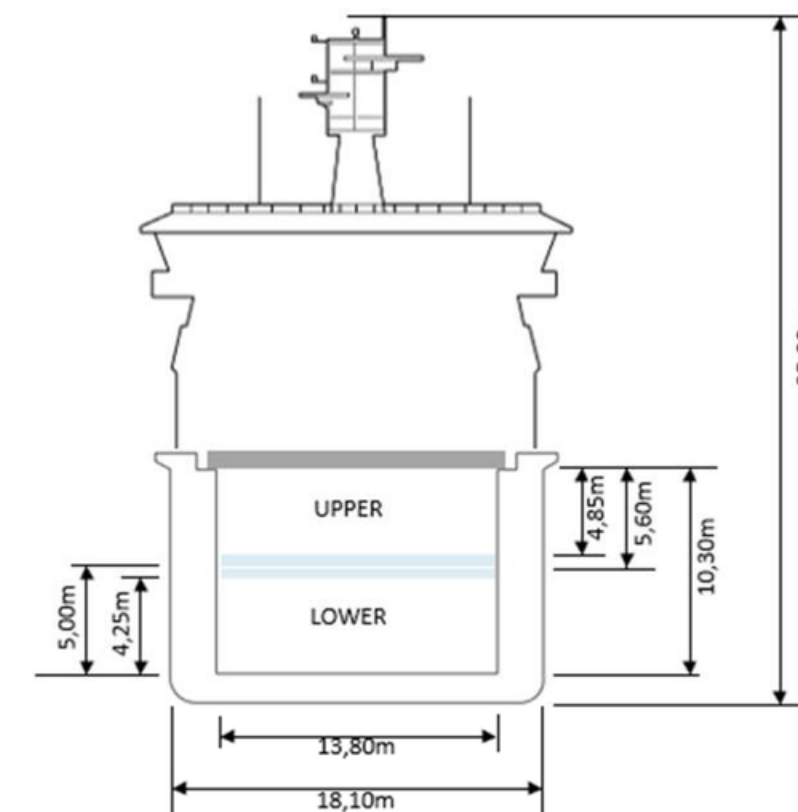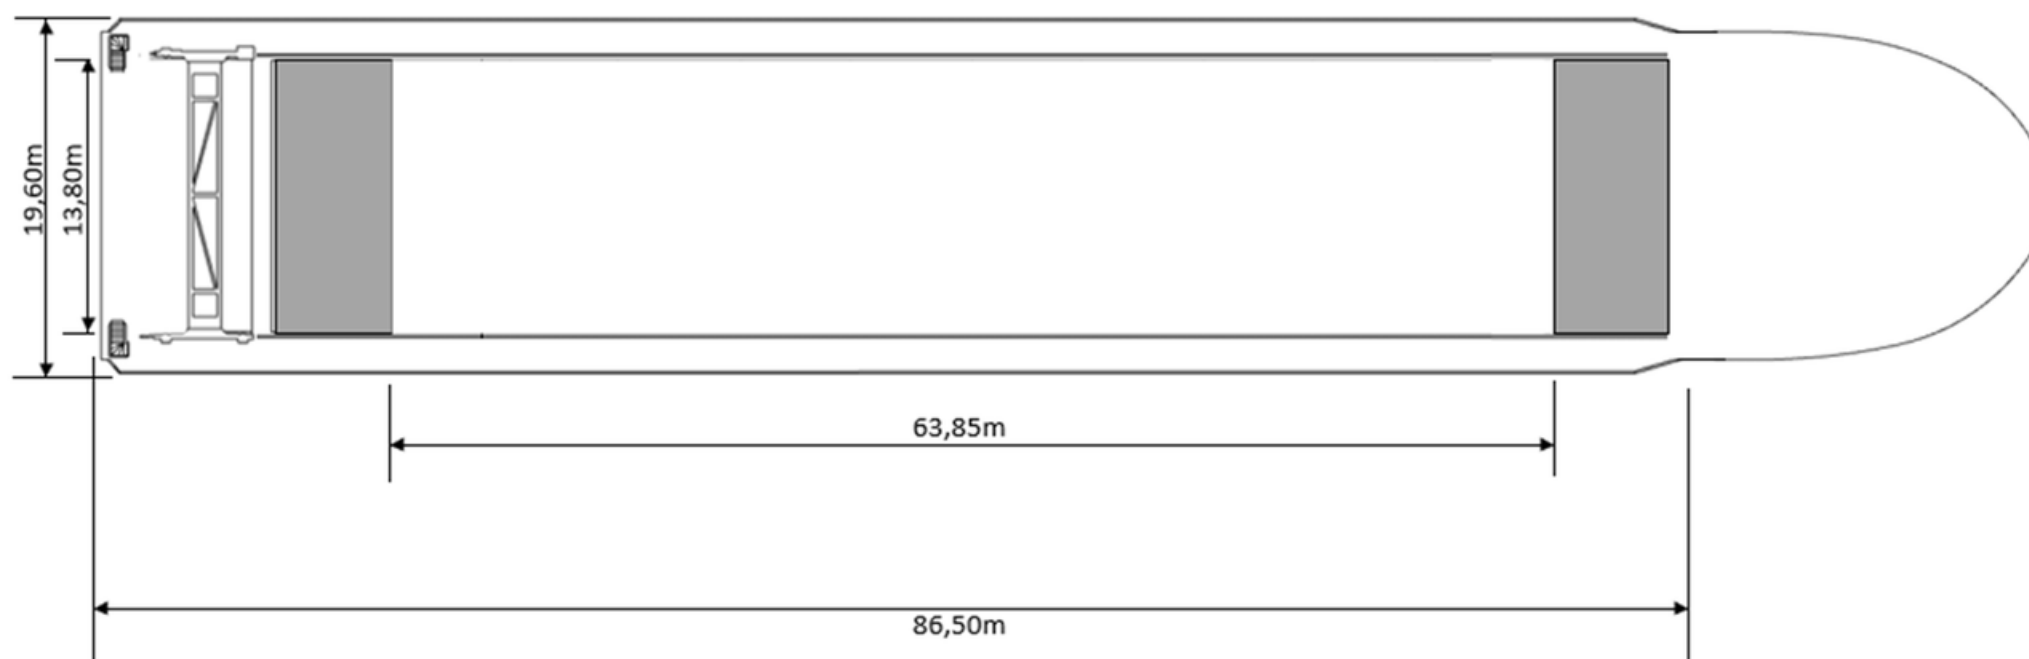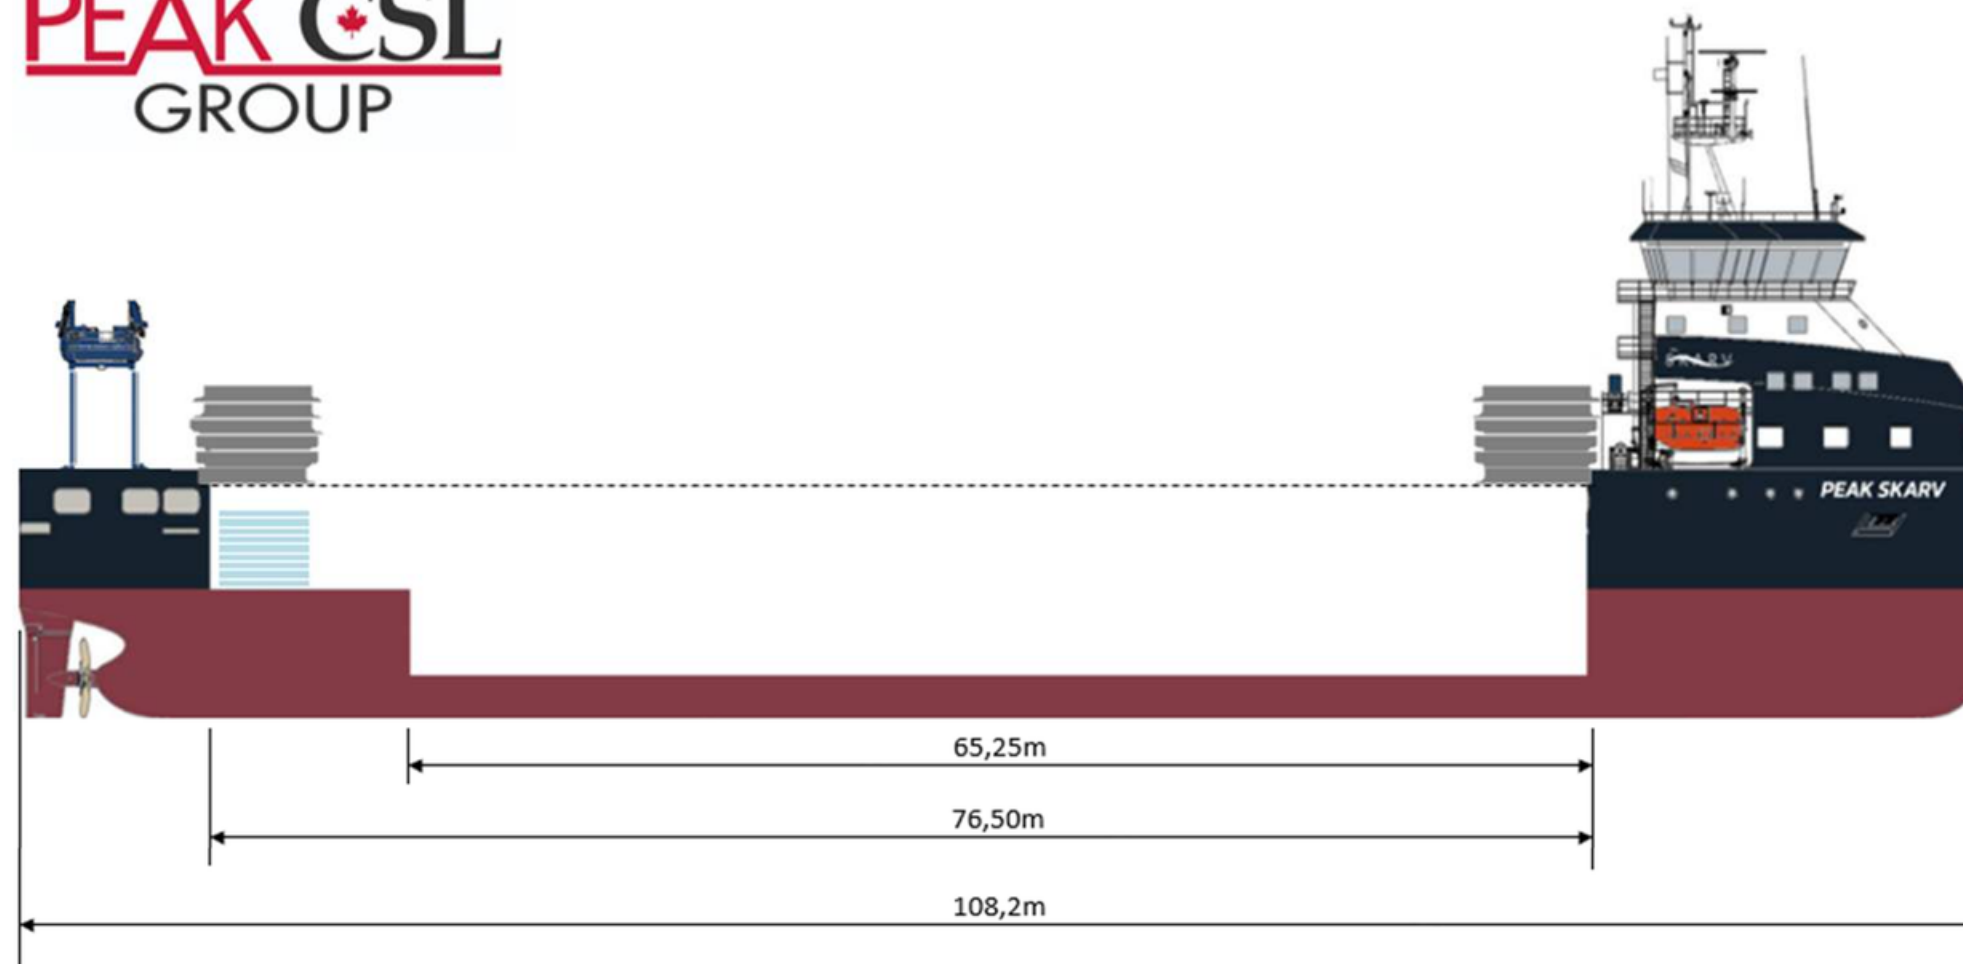

PEAK SKARV S-CLASS

MAIN DIMENTIONS

LOA	: 108,20 meter
Beam	: 18,10 meter
Beam extreem	: 19,60 meter

HOLD CHARACTERISTICS

Cargo hold dimentions	: 65,25x13,80x10,30 meter
Cargo hold Cubic	: 10 120m ³ / 357 385ft ³
Movable bulkheads	: Yes. 7 positions
Tweendecks	: Yes. 9 pcs 2 (high/low) positions
Hold Ventilation	: Yes. 6 changes/hour

DECK CHARACTERISTICS

One Hatch	: 86,50x19,60m
Hatch cover type	: Pontoon. 12 pcs.

CAPACITIES

Tanktop load	: 15 t/sqm
Weather hatch load	: 3,5 t/sqm
Tweendeck pontoon load	: 3,5 t/sqm
Container stack load	: 44 mt cargo hold
	: 90 mt deck