

Project Details

Name:

Location:

Specifier:


Date:

Additional Accessories: Power Input Kit Bumpers Power Supplies Controls AG Roller Silicone

Part Number Specification | Tunable White

Model	Voltage	Color (check box)	Sheet Size
AG2.1 - Auragami Gen 2.1	24 - 24VDC Constant Voltage	☒ TW - 1800-6500K tunable white	1224 - 12in x 24in

Example: AG2.1-24-TW-1224. Customizable options available. See last page for full details.

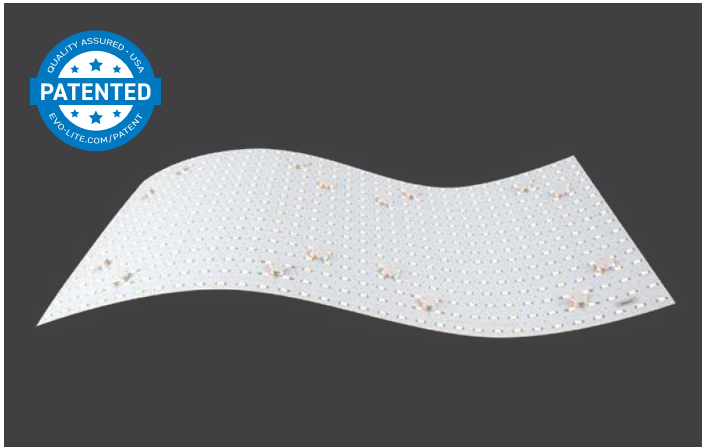

Auragami Gen 2.1 (AG2.1)



Second Generation Flexible Light Sheet

Tunable White - 1800-6500K

Product Description: The second generation light sheet delivers several new innovations to the category. The industry's most advanced light sheet delivers unparalleled performance, reliability, and ease-of-use.

Highlights

- Choose any color between warm 1800K and cool 6500K
- New and improved IP67 connectors, cut lines, and quad bumpers for material support
- IP67 Rated for wet locations with newly engineered polyimide coating
- Cuttable down to a single LED or LED group while maintaining UL Listing
- Easy installs with plug-in-play light sheet connections
- Patented design offers a variety of exclusive innovations



Specifications | *Listed per full (12x24") light sheet.*

Input Voltage	24VDC Constant Voltage
Power Consumption	17.2 watts (8.6W/ft²)
Color Temperature	1800-6500K adjustable white
CRI	Up to 95+
Light Output	1,720 lumens
Efficiency	100 lumens per watt
LED Information	Type: SMD-2835 LEDs. Count: 512 LEDs. Beam angle: 120°
Wires	20AWG 3-wire (cool white = white wire - / warm white = yellow wire - / black wire +)
Connections	IP67 premium grade terminals and plug-in sheet connectors.
Mounting	Adhesive backing and/or mechanical fasteners through precut mounting holes.
Temperature	Operating: -22° to 122°F. Working: 93°F
Surface Temperature	LED: 97°F. PCB: 90°F. Resistor: 93°F (Measured at ≥2 hours of operation).
Environment	IP67 - wet or dry locations
Dimensions	12 x 24in (1 x 2ft) / UL Listed field cuttable
Coverage	2ft² (1x2ft)
Maximum Run	Connect up to 5 full light sheets (86W) / 10ft² per Class 2 guidelines
Cut / Fold Line Spacing	0.75in / every LED
Weight	0.65lbs / 10.5oz / 297g
Rated Life	50,000+ hours
Warranty	5-year warranty (view terms online at evo-lite.com)




Power & Controls

Compatible with all control protocols via associated power and control components. Quality tested for low-end light output consistency across all LEDs (100-0% dimming with tight ANSI bin control).

Class 2 & UL Compliance


Use Class 2 power supplies with a maximum power output of 96W (per channel/circuit) to retain UL Class 2 Listing compliance. Best practices include allowing headroom for power supply longevity.

Packaging Contents




Complete Your System | *View ordering section*


Technical Drawings

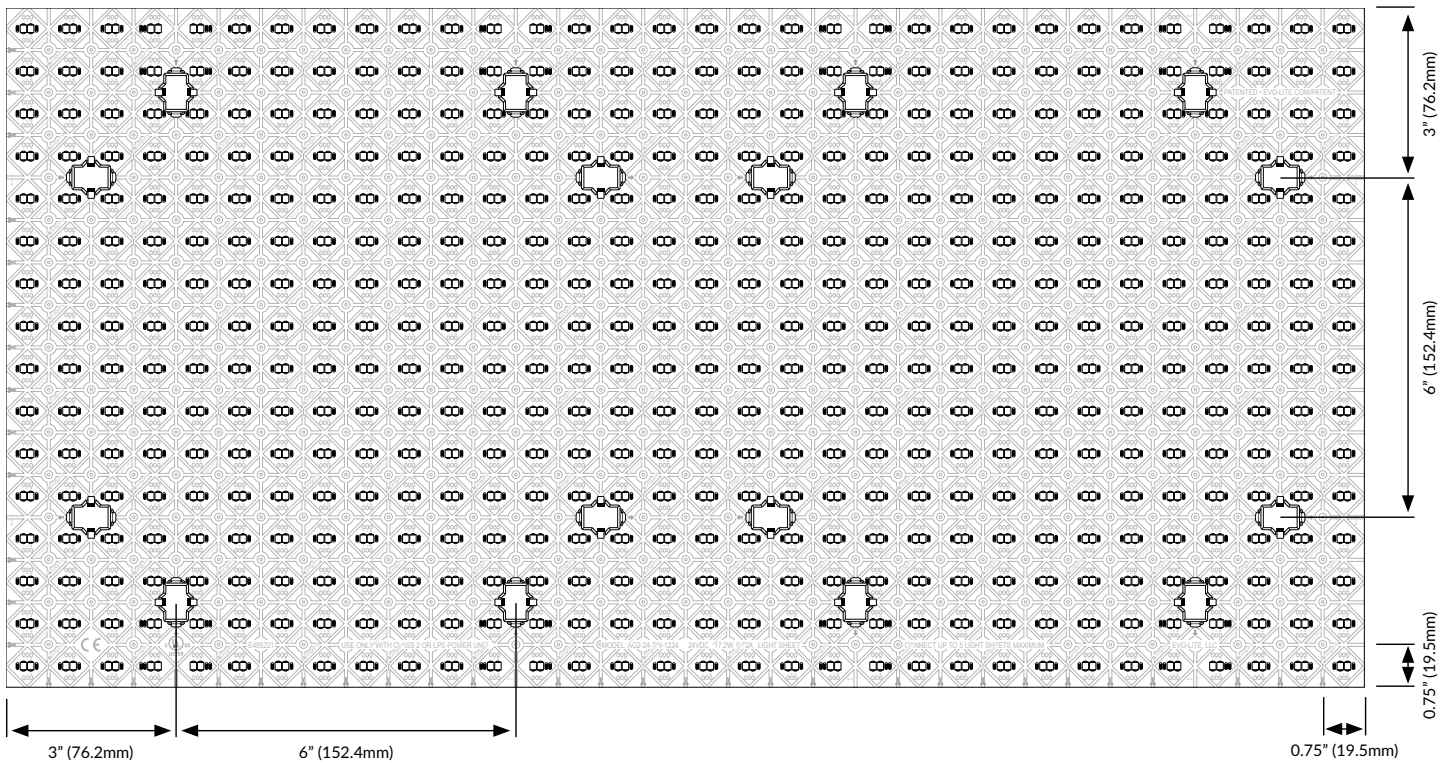

Light Sheet & LED height




IP67 Terminal Dimensions

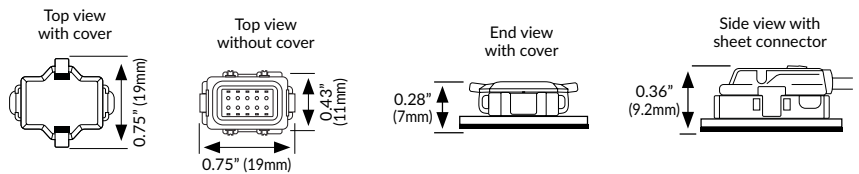


Accessory Pack (included)

Short Sheet To Sheet Connector (Qty. 2)




Long Sheet To Sheet Connector (Qty. 2)

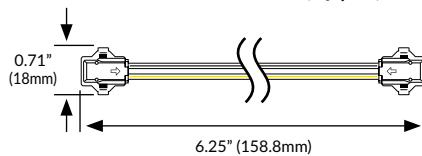


Bumper Pack (Sold Separately)

Quad Bumper Pack (Qty. 8)

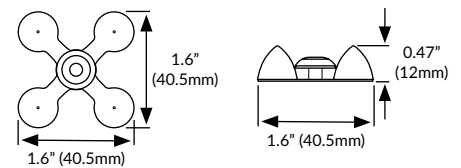


Power Input Kit (sold Separately)


Power Input Cable (Qty. 1)



Cable Clips (Qty. 4)



Wago Connectors (Qty. 3)



Ordering | Tunable White

Model	Voltage	Color	Sheet Size
AG2.1 - Auragami Gen 2	24 - 24VDC Constant Voltage	TW - 1800-6500K tunable white	1224 - 12in x 24in

Example Part Number

AG2.1	—	24	—	TW	—	1224
Model		Voltage		Color Temp		Sheet Size


Accessories

ITEM	PART NUMBER	DESCRIPTION
Tunable White Power Input Kit (Required)	AG2-24-TW-PIK	Powers one 24VDC Class 2 circuit (86W / 5 full light sheets). Includes (1) 48" tunable white power input cable, (2) Wago splicing connectors, and (4) wire management clips.
Light Sheet Quad Bumpers	AG2-075-047-QSB-P08	(8) Light Sheet Quad Bumpers for single color and tunable white light sheets.
Short Sheet To Sheet Connectors	AG2.1-24-TW-SCP	(4) Additional Tunable White Short Sheet To Sheet Connectors.
Long Sheet To Sheet Connectors	AG2.1-24-TW-LCP	(4) Additional Tunable White Long Sheet To Sheet Connectors.
Auragami Installation Roller	AG1-RLR-EVO	Specially designed foam roller assists in light sheet mounting. Safely mount light sheets without damaging terminals or LEDs.
Electronic Grade Silicone	SI-388CL-EVO	Acid-free electronic grade silicone may be used to supplement cut edges and connection terminals

Suggested Power Options


ITEM	PART NUMBER	DESCRIPTION
24V, 5-IN-1 Dimmable LED Driver (1 circuit of 96W)	PS-5N1-1C2496-EVO	24VDC 5-IN-1 Dimmable LED Driver. Compatible with most control protocols: Triac / Phase, 0-10V, 1-10V, Potentiometer, and 10V PWM. 1 circuit of 96W.
24V, 5-IN-1 Dimmable LED Driver (2 circuits of 96W each)	PS-5N1-2C24192-EVO	24VDC 5-IN-1 Dimmable LED Driver. Compatible with most control protocols: Triac / Phase, 0-10V, 1-10V, Potentiometer, and 10V PWM. 2 circuits of 96W each.
24V, 5-IN-1 Dimmable LED Driver (4 circuits of 96W each)	PS-5N1-4C24384-EVO	24VDC 5-IN-1 Dimmable LED Driver. Compatible with most control protocols: Triac / Phase, 0-10V, 1-10V, Potentiometer, and 10V PWM. 4 circuits of 96W each.

Also Available From Evo-Lite




SINGLE COLOR WHITE

2700K, 3000K,
3500K, 4000K, 5000K




RGBW

Billions of colors + dedicated
5000K white diodes.



AURAGAMI BASIC

2700K, 3000K, 3500K,
4000K, 5000K, TW, RGBW



AURAGAMI BASIC WITH LENS

2700K, 3000K, 3500K,
4000K, 5000K, (175° lens)

Auragami Customization Options

All Auragami customizations maintain the UL Listing. Minimum order may apply.

- Voltage
- Power/efficiency/brightness
- Specific color temperatures
- IP Ratings
- Custom sizes/shapes
- LED pitch and placement
- PCB material type, pre-cut sheets
- Pre-mounted to quick install substrates

Custom Power Option Examples

Power (W/ft²)	Light Output (Lm/ft²)	Total Sheet lumens (2ft²)
8.6	860	1,720
6.45	645	1,290
4.3	430	860
2.15	215	430