

1 BEYOND CAMERAS

Capture what counts. Every meeting. Any space.



i-Series cameras

Intelligent cameras with Visual AI-based features including group framing, presenter tracking, and multi-camera intelligent switching. Wide-angle reference camera in base provides for full room analysis.



p-Series cameras

Standard PTZ cameras are ideal for clear close-up shots. They excel when used in tandem with multi-camera applications including the Automate VX multi-camera speaker tracking solution or can be used standalone.

Just add video conferencing

Easily connect any 1 Beyond camera directly to your preferred video conferencing platform via USB, SDI, HDMI® connectivity, or NDI® | HX2 connectivity as a standalone PTZ camera.



Visual AI

i-Series models can leverage Visual AI to automatically provide optimal framing, tracking, and dynamic views of the room.



Group framing

Using its wide-angle reference camera to detect when participants enter or leave the frame, the camera automatically adjusts to keep everyone in view.



Presenter tracking

Using advanced Visual AI for facial detection and body movement, i-Series cameras follow presenters smoothly so they can conduct presentations naturally. Additionally, i-Series cameras support Group Presenter Tracking and Preset Zones options.

Built for high performance



12x and 20x zoom options and premium sensors



Wide dynamic range and advanced color correction for enhanced image quality



Camera Manager software streamlines setup



Universal Mounting Bracket offers versatile installations



Easily see when camera output is turned off for privacy



Moon Gray or Bright White model color options




Better together

Built with multi-camera setups in mind, Intelligent Switching lets everyone see everything that matters, whether it's someone speaking from the back of the room, notes on the whiteboard, or reactions from the team.

Intelligent switching with 1 Beyond cameras

Switch between five cameras, including a primary camera connected via USB and up to four companion cameras.

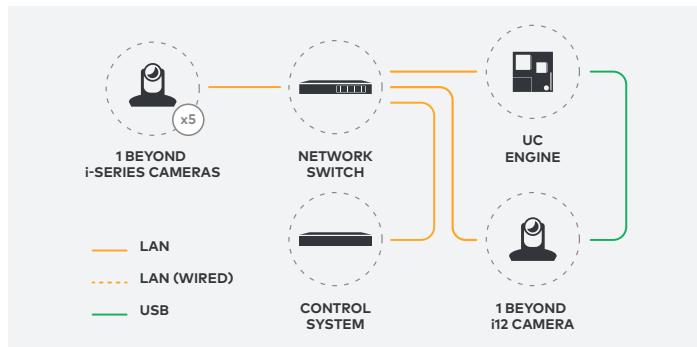

Automatic using visual cues

The most important areas in your room, center stage. Cameras automatically switch when individuals enter or exit zones in the room, prioritizing key areas.

Custom control

Take control of your view. Seamless integration with a Crestron control system lets you activate a custom control program with just one touch.

Intelligent switching with Automate VX speaker tracking solution

Combine multiple 1 Beyond cameras with our Automate VX solution. Remote participants enjoy a clear view of everyone in the room and in-person participants never have to think about where to look to follow the conversation.

1 Beyond camera models

	i12	i20	p12	p20
Ideal use	Group framing, presenter tracking up to 25" (7.6m)	Presenter tracking up to 50' (15.2m). Group presenter tracking/preset zones up to 50' (15.2m)	PTZ	PTZ
Intelligent switching with 1 Beyond cameras	Primary or companion camera	Companion camera	Companion camera (<i>custom control only</i>)	Companion camera (<i>custom control only</i>)
Intelligent switching with Automate VX	✓	✓	✓	✓
Optical zoom	12x	20x	12x	20x
Field of view	H: 67.68° - 6.92° V: 53.88° - 5.51°	H: 56.45° - 3.96° V: 40.31° - 2.83°	H: 67.68° - 6.92° V: 53.88° - 5.51°	H: 56.45° - 3.96° V: 40.31° - 2.83°
Government model	✓	✓	—	✓

Learn more at crestron.com/1beyond

 **CRESTRON**

CRESTRON ELECTRONICS, INC. • 15 VOLVO DRIVE • ROCKLEIGH, NJ, 07647
CRESTRON.COM • 800.237.2041

v. 081825

All brand names, product names, and trademarks are the property of their respective owners. Certain trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. ©2025 Crestron Electronics, Inc.