


Swivel Hoist Ring - type 203 working load application factors

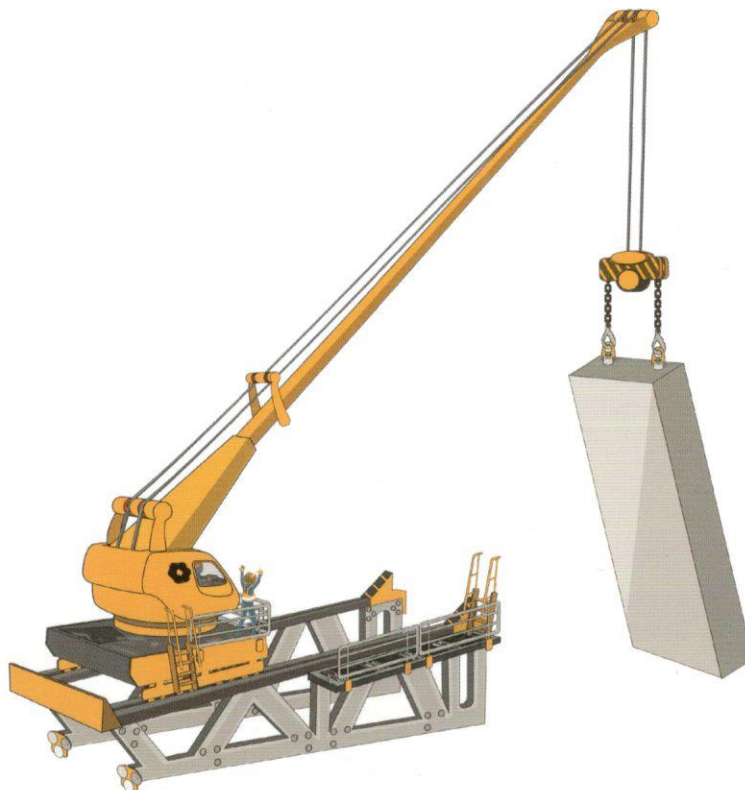

Number of legs		1	2	1	2	2		2	3-4		3-4
Load Direction		0°	0°	90°	90°	0-45°	45-60°	unsymm	0-45°	45-60°	unsymm

Item No.	Thread	WLL tonnes									
8-203-004	M8	0.50	1.00	0.50	1.00	0.70	0.50	0.50	1.05	0.75	0.50
8-203-005	M10	0.55	1.10	0.55	1.10	0.77	0.55	0.55	1.16	0.83	0.55
8-203-010	M12	1.30	2.60	1.30	2.60	1.82	1.30	1.30	2.73	1.95	1.30
8-203-019	M16	2.40	4.80	2.40	4.80	3.36	2.40	2.40	5.04	3.60	2.40
8-203-021	M20	2.70	5.40	2.70	5.40	3.78	2.70	2.70	5.67	4.05	2.70
8-203-042	M24	5.25	10.5	5.25	10.5	7.35	5.25	5.25	11.03	7.88	5.25
8-203-070	M30	8.75	17.50	8.75	17.50	12.25	8.75	8.75	18.38	13.13	8.75
8-203-110	M36	13.75	27.50	13.75	27.50	19.25	13.75	13.75	28.88	20.63	13.75
8-203-125	M42	15.60	31.20	15.60	31.20	21.84	15.60	15.60	32.76	23.40	15.60
8-203-135	M48	16.90	33.80	16.90	33.80	23.66	16.90	16.90	35.49	25.35	16.90