


Stainless Steel High Tensile Lifting Dee Shackle with screw collar pin


Material: 17/4 PH precipitation hardening martensitic stainless steel
Safety Factor: MBL equals 6 x WLL
Finish: Polished
Certificate: As standard; EC Declaration of Conformity
 Upon request; 3.1
Note: The below item is available with extra long screw pin with hole
 for split pin and with countersunk pin with slotted head

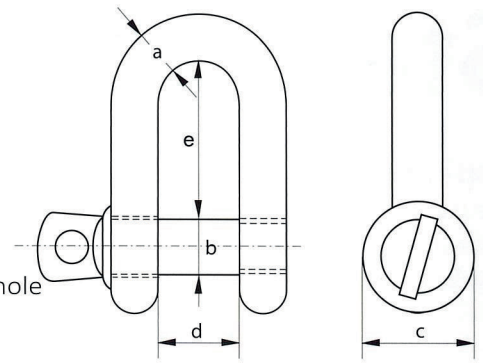

WLL	Diameter Bow	Diameter Pin	Diameter Eye	Width Inside	Length Inside	Product Code	Weight Each
t	a	b	c	d	e		kg
1	8.0	10.0	20	16	32	91001	0.09
2	10.0	12.7	25	20	40	91002	0.15
3	12.7	16.0	32	25	50	91003	0.35
5	16.0	19.0	38	32	64	91004	0.55
7	19.0	22.2	45	38	76	91005	1.00
9	22.2	25.4	50	44	88	91006	1.90
11	25.4	28.6	56	51	102	91007	2.90
13	28.6	31.8	64	57	114	91008	3.10
15	31.8	34.9	70	64	128	91009	4.35
18	34.9	38.0	76	70	140	91010	5.30

Stainless Steel High Tensile Lifting Bow Shackle with screw collar pin

Material: 17/4 PH precipitation hardening martensitic stainless steel
Safety Factor: MBL equals 6 x WLL
Finish: Polished
Certificate: As standard; EC Declaration of Conformity
 Upon request; 3.1
Note: The below item is available with extra long screw pin with hole
 for split pin and with countersunk pin with slotted head

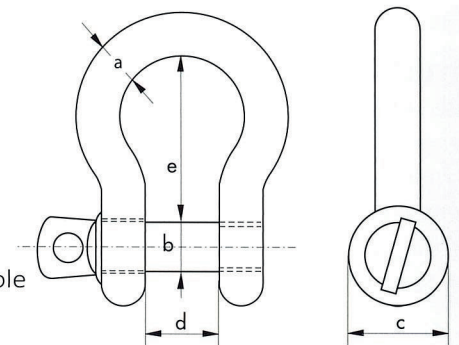

WLL	Diameter Bow	Diameter Pin	Width Inside	Length Inside	Width Bow	Product Code	Weight Each
t	a	b	c	d	e		kg
0.8	8.0	10.0	16	32	24	91020	0.09
1.5	10.0	12.7	20	40	30	91021	0.16
2.5	12.7	16.0	25	50	38	91022	0.37
4.0	16.0	19.0	32	64	48	91023	0.58
5.5	19.0	22.2	38	76	57	91024	1.05
7.5	22.2	25.4	44	88	66	91025	1.99
9.0	25.4	28.6	51	102	76	91026	3.05