
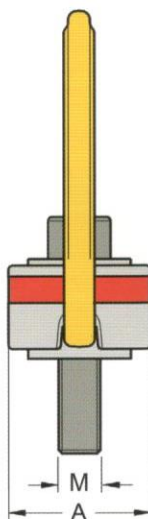


Swivel Hoist Ring - type 203 metric thread with alloy steel washer

- Rotates through 360° and pivots 180°, and simultaneously allows lifting from any direction.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M).
- Proof tested to 2.5 times the WLL on the 4 : 1 factor.
- Fatigue rated to 1.5 times the WLL.
- Design Factor 4 : 1
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

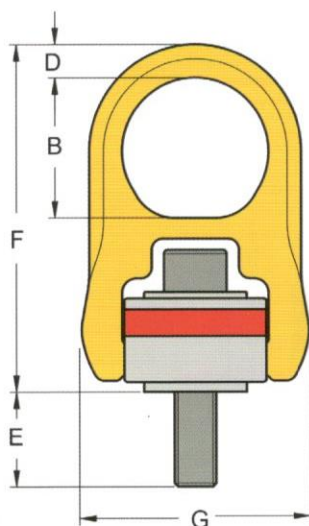

Part Code	WLL tonnes 5 : 1	WLL tonnes 4 : 1	Thread M	A mm	B mm	D mm	E mm	F mm	G mm	Torque Nm	Mass Kg
8-203-004	0.40	0.50	M8 x 1.25	40	41	9	17	102	65	10	0.4
8-203-005	0.45	0.55	M10 x 1.5	40	41	9	11	102	65	16	0.5
8-203-010	1.05	1.30	M12 x 1.75	65	64	15	15	158	105	38	1.7
8-203-019	1.90	2.40	M16 x 2	65	64	15	20	158	105	81	1.8
8-203-021	2.15	2.70	M20 x 2.5	65	64	15	25	158	105	136	1.8
8-203-042	4.20	5.25	M24 x 3	85	79	19	26	204	134	312	4.2
8-203-070	7.00	8.75	M30 x 3.5	100	100	25	81	241	160	637	6.6
8-203-110	11.00	13.75	M36 x 4	120	111	30	76	286	194	1005	15.0
8-203-125	12.50	15.60	M42 x 4.5	120	111	30	65	286	220	1005	16.0
8-203-135	13.50	16.90	M48 x 5	120	111	30	70	286	220	1350	16.0

Bolt in GEOMET® finish on request.