





TECHNICAL SHEET


PERFORMANCE AND DIMENSIONS

Main features

Double pantograph geometric platform, with the widest outreach without limiting devices in its category. Electrically insulated up to 46kV, it allows it to work safely on or near high voltage lines. With its 87' 3" of working height, its three areas of stabilization, the automatic leveling of the stabilizers, is able to operate at its best in any condition.

Max. working height	87' 3"
Max. outreach with 180 kg	42' 8"
Platform height	77' 5"
Max. load in basket	396 lbs
Basket dimensions	24" × 24" × 43"
Basket rotation	+/-90°
Turret rotation	+/- 200° (400° continuous)
Total weight	10,317 lbs

C.M.C. s.r.l. Via Bitritto, 119 - 70124 Bari - Italy Tel. +39 080 532 66 06 cmclift.com - info@cmclift.com

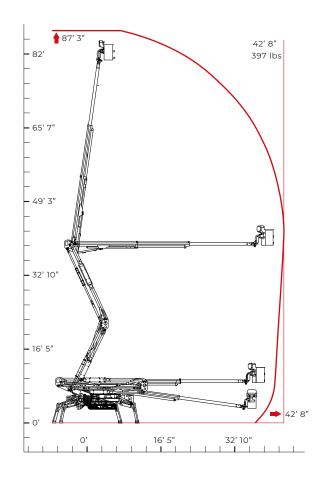




















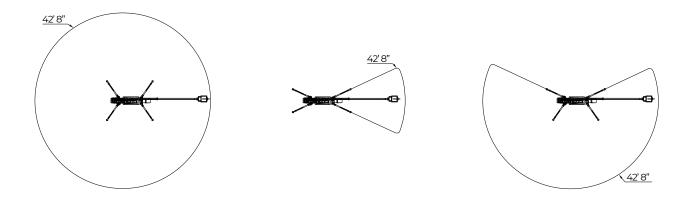

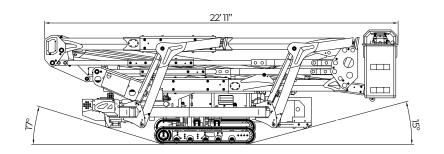

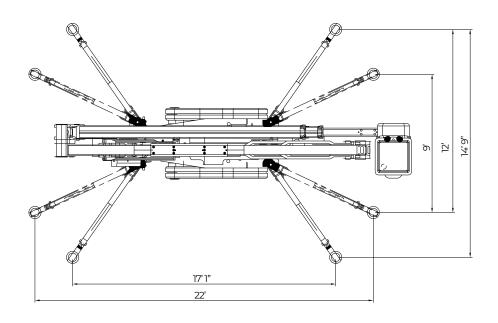





* Options - ** these data may vary depending on the acc	essories chosen
Fuel tank capacity	30 L
*Options engines	Auxiliary electric engine 120 V - 1.6 kW
Standard engines	Kubota D902-E4B diesel engine, 16.1 kW (21.6 HP), 3200 rpm
POWERS	
Full Lithium version 48V*	N.D.
Auxiliary electric engine 110/230 V*	N.D.
Kubota Z902	N.D.
TRAVEL SPEED (KM/H)**	
Max. pressure in work with 2 outriggers opened and 2 outriggers closed	N.D.
Max. pressure in work with 4 outriggers closed	N.D.
Max. pressure in work with 4 outriggers opened	N.D.
Max. pressure on the tracks	N.D.
Max. pressure on the foot	N.D.
PRESSURES	
One man fiberglass basket (L x W x H)	24" x 24" x 43"
BASKETS AVAILABLE	
Total weight (standard equipment)	10,317 lbs
Outriggers plate Ø	9.4"
Total width without basket	35"
Height in driving position (with tracks opened)	84"
Height in driving position (with tracks closed)	78"
Total lenght with basket bracket rotated	22' 11"
DIMENSIONS	
Max. longitudinal slope to travel	19° - 34%
Max. ramp attack slope (engine side) with tracks closed/opened	8°/17° - 10%/26%
Max.ramp.attack.slope (basket.side) with tracks closed/opened	15°/7° - 14%/30,5%
Basket rotation	+/-90°
Turret rotation	+/-200° (tot. 400°)
Max. basket capacity	396 lbs
Max. working outreach	42' 8" (with 396 lbs)
Max. working height	87' 3"