




## TECHNICAL SHEET

### PERFORMANCE AND DIMENSIONS

#### Main features

Double pantograph geometric platform, with the widest outreach without limiting devices in its category. Electrically isolated up to 46kV, it allows it to work safely on or near high voltage lines. With its 75 ft of working height, its three areas of stabilization, the automatic leveling of the outriggers, it is able to operate at its best in any condition.

Max. working height	<b>76' 5"</b>
Max. outreach with 397 lbs	<b>33' 9"</b>
Platform height	<b>69' 10"</b>
Max. load in basket	<b>397 lbs</b>
Basket dimensions	<b>24" x 24" x 43"</b>
Basket rotation	<b>+/- 90°</b>
Turret rotation	<b>+/- 200° (400° continuous)</b>
Total weight	<b>8,664 lbs</b>

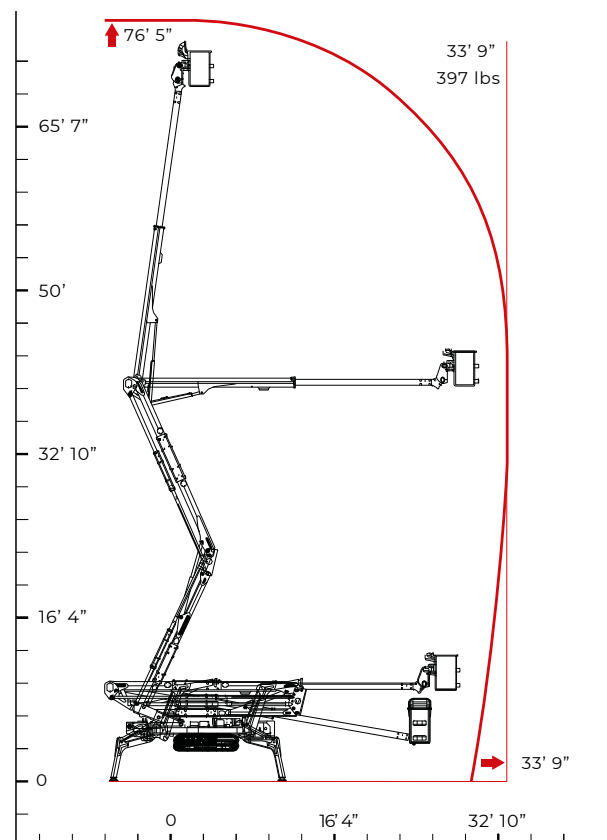

\*Technical data sheets have been converted from metric measurements to U.S. customary units (feet and inches) to provide the most accurate specifications for the U.S. market. All specifications are subject to change and are non-binding. Always refer to the official operator's manual for the exact and most up-to-date technical data.



