




TECHNICAL SHEET PERFORMANCE AND DIMENSIONS

Main features

Double pantograph geometric platform, with the widest outreach without limiting devices in its category. Electrically isolated up to 46KV, it allows it to work safely on or near high voltage lines. With its 87' 3" of working height, its three areas of stabilization, the automatic leveling of the outriggers, it is able to operate at its best in any condition.

Max. working height	87' 3"
Max. outreach with 397 lbs	42' 8"
Platform height	77' 5"
Max. load in basket	397 lbs
Basket dimensions	24" x 24" x 43"
Basket rotation	+/- 90°
Turret rotation	+/- 200° (400° continuous)
Total weight	10,317 lbs

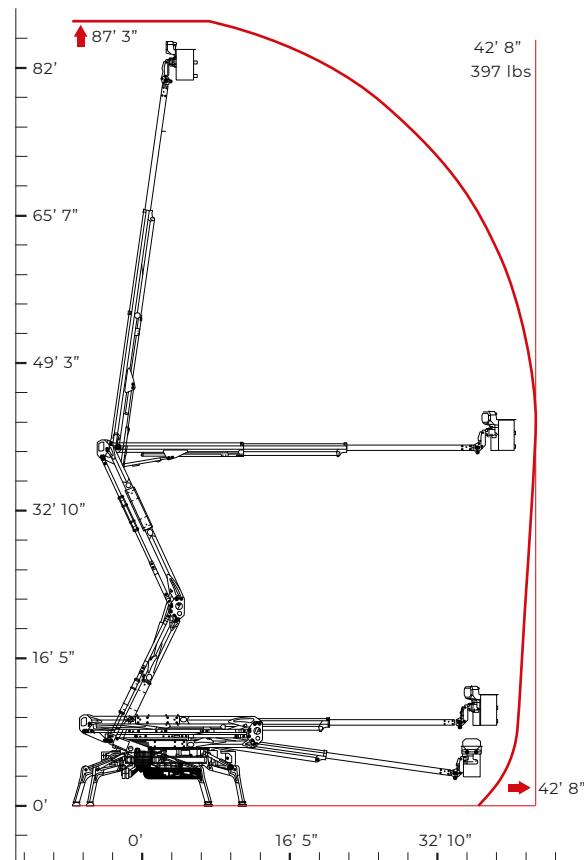

*Technical data sheets have been converted from metric measurements to U.S. customary units (feet and inches) to provide the most accurate specifications for the U.S. market. All specifications are subject to change and are non-binding. Always refer to the official operator's manual for the exact and most up-to-date technical data.



