




TECHNICAL DATA

PERFORMANCE AND DIMENSIONS

Main Features

Honda iGX390 gas engine; Hydraulically adjustable tracks in width; Black rubber tracks; Basket rotation $\pm 90^\circ$; two-man basket (55" x 28" x 43") equipped with quick-release system and wheels; 200 Bar air/water hose in the basket; 12V electrical socket in the basket; Protective covers for outrigger cylinders; Display with error code detection; Proportional hydraulic controls; Proportional travel mode by radio remote control; Lifting hooks; Fixing points for transport; Double travel speed; Automatic outriggers leveling; Standard painting (RAL 3000); 24-months warranty (see warranty statement).

Max. working height	65' 4"
Platform height	58' 10"
Max. lateral outreach	34' 2"
Max. basket capacity	507 lbs
Basket dimensions	55" x 31" x 43"
Basket rotation	$\pm 90^\circ$ (optional)
Turret rotation	$\pm 180^\circ$ (360° non-continuous)
Total weight	6,569 lbs

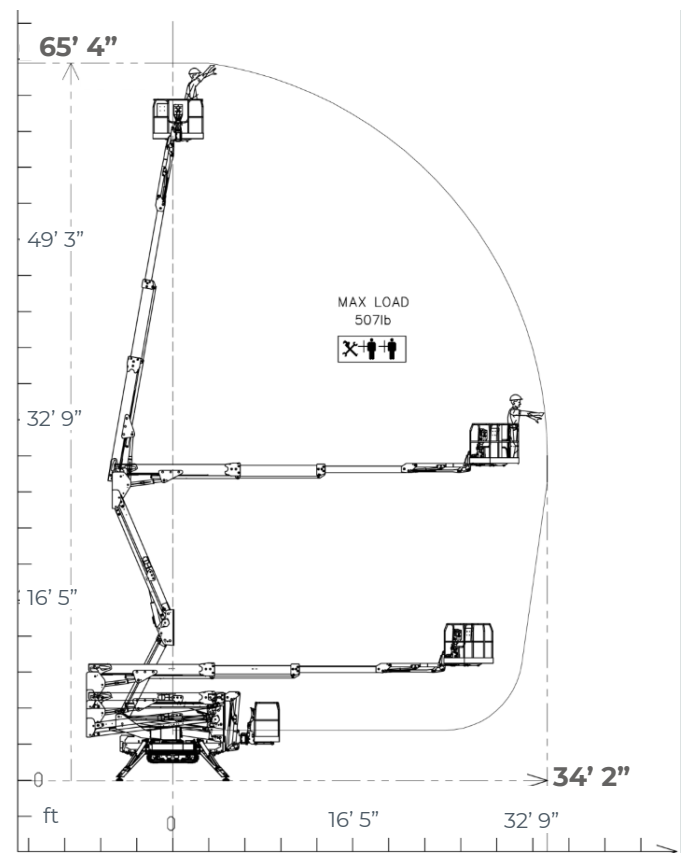

*Technical data sheets have been converted from metric measurements to U.S. customary units (feet and inches) to provide the most accurate specifications for the U.S. market. All specifications are subject to change and are non-binding. Always refer to the official operator's manual for the exact and most up-to-date technical data.



