




## TECHNICAL SHEET PERFORMANCE AND DIMENSIONS

### Main features

A bundle of power and technology capable of performing in any application. It has three stabilization areas, two working areas and climbing outriggers for working on all types of terrain and reaching even the most difficult spots with its maximum working height of 100 ft, lateral outreach of 50' 6" and the ability to work in negative down to -22 ft.

Max. working height	<b>100'</b>
Possibility of working in negative	<b>-22'</b>
Max. outreach with 176 lbs	<b>50' 6"</b>
Platform height	<b>92' 10"</b>
Max. load in basket	<b>507 lbs</b>
Basket dimensions	<b>43" x 27" x 48"</b>
Basket rotation	<b>+/- 90°</b>
Turret rotation	<b>+/- 200°(400° continuous)</b>
Total weight	<b>9,447 lbs</b>

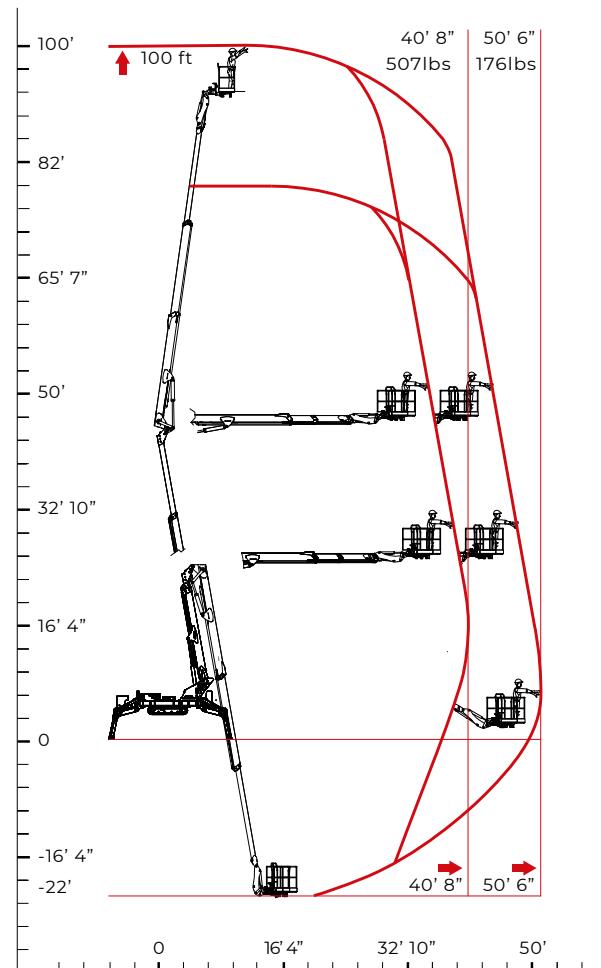

\*Technical data sheets have been converted from metric measurements to U.S. customary units (feet and inches) to provide the most accurate specifications for the U.S. market. All specifications are subject to change and are non-binding. Always refer to the official operator's manual for the exact and most up-to-date technical data.



