



Autosmart 3SV

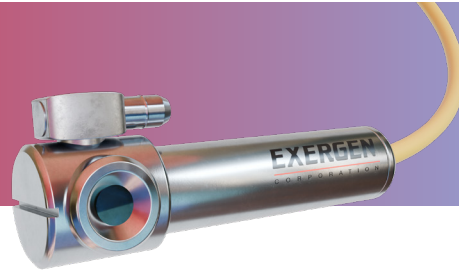

Product Overview

The AutoSmart 3SV features:

- Output 0-5V, 0-10V, 4-20mA (scalable)
- Non-contact
- Repeatability error 0,1% full scale
- Interchangeability $\pm 1.5\%$ full scale
- Resolution approx. 0,1°C (0.2°F)
- Small size sensor

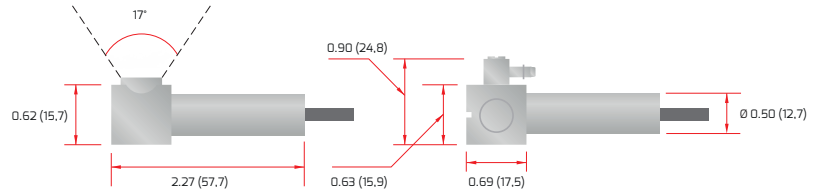

Technical Data

Sensor Range	-35 to 250°C (-31 to 482°F)
Sensor Ambient Temperature Range	-50 to 100°C (-58 to 212°F) With air on: -50 to 120°C (-58° to 248°F)
Transmitter Ambient Temperature Range	0 to 70°C (32 to 158°F)
Storage Temperature Range	-10 to 70°C (14 to 158°F)
Field of View	approximately 17° (3:1)
Minimum Spot Size	5 mm (0.2")
Spectral Response	6,5 to 14μm
Update Time	Approximately 250 msec.
First Reading Upon Power Up	Approximately 2 seconds

Connector cable	3 m (9.8 ft) 22AWG*4C + F + Jacket black PUR cable OD=5,0 mm -40°C~+105°C
Sensor cable	0,9 m (3 ft) Twisted shielded pair of base thermocouple material (J,K,E,T) Telfon sheated, rated to 200°C (392°F) continuous service
Sensor Dimensions	See diagram above
Weight	Sensor: 44g (1.6oz.) with cable. Transmitter: Approximately 50g (1.702oz.)
Housing	Stainless steel, hermetically sealed, exceeds NEMA 4,4X; IP65, 67, cable shield grounded to housing and electrically isolated from signal
Emissivity Setting	0,90
Power	12 or 24VDC ($\pm 10\%$). Shuts off when voltage is functionally low
Power Consumption	$\pm 10\text{mA}$ (without output signal device)
Including Air Purge	Built-in; for cooling and cleaning of sensor
Loop Impedance	(4-20mA models) >500Ω

Ordering Information

AutoSmart 3SV - ☐ - ☐ - ☐

Power:

12 = 12VDC

24 = 24VDC

Output:

005 = 0-5V

010 = 0-10V


420 = 4-20mA

Temperature range:

100 = 0 to 100°C (32 to 212°F)

250 = 0 to 250°C (32 to 482°F)

Dimensions

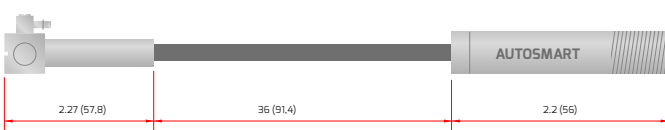

USA

400 Pleasant Street

Watertown

02472 MA

cleverIR-USA@cleverir.com

+1 617 649 7597

cleverir.com

Europe

Pastoor Clercxstraat 26

5465 RH Veghel

The Netherlands

office@cleverir.com

+31 413 376 599