

Datasheet

IRt/c.01




Product Overview

The IRt/c.01 features:

- Infrared Thermocouple IRt/c
- Non-contact
- Self-powered
- Intrinsically Safe
- Repeatability 0,01°C (0.02°F)
- Interchangeability ±1%
- Resolution approx. 0,0001°C (0.0002°F)
- Small Size

O.D. 0.725 x 18 T.P.I. REF.
(DINPG11 Threads)

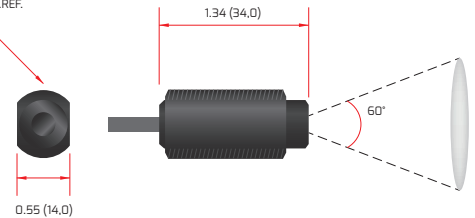

Technical Data

Sensing Range	-45 to 290°C (-50 to 550°F)
Ambient Temperature Range	-18 to 70°C (0 to 160°F)
Optimum Range Selections	Eight models per t/c type (see Temperature Selection Chart)
Field of View	approximately 60° (1:1)
Minimum Spot Size	8 mm (.3")
Spectral Response	6,5 to 14µm
Output Impedance	3 Kohms approx

Response Time	100 Milliseconds
Dimensions	32.5 x 20 mm Dia. (1.28" x .71")
Housing	High strength ABS, hermetically sealed, exceeds NEMA 4,4X; IP65, 67, intrinsically safe. Two locknuts supplied
Cable	Thermocouple extension grade, PVC jacket, unshielded, 0,9 m (3")
Weight	40g (1.4oz.) with cable

Calibration

Ordering information IRt/c.01-* (Thermocouple Type) - (Precalibrated Temperature Range). Thermocouple type J or K over temperature range specified.

Temperature Selection Chart

