




WARNRAY® Ultra Wide View Angle Emergency Warning Light

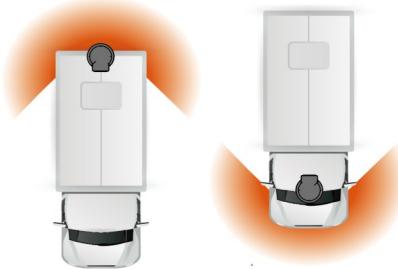

WARDRAY® ULTRA SLIM & WIDE VIEW ANGLE LED STROBE LIGHT

NEW

THIS NEW GENERATION LED STROBELIGHT HAS BEEN DESIGNED WITH A WATER RESISTANT, SLIM SHARP AND AN ULTRA WIDE VIEWING ANGLE UPTO 180° AND 270°. IT IS SUITEABLE FOR MANY APPLICATION, SUCH AS EMERGENCY WARNING LIGHTS FOR DOT WORK TRUCKS, UTILITY TRUCKS, AND OTHER EMERGENCY VEHICLES. IT IS SAE DOT J845 CLASS 1 COMPLOANT FOR PRMARY EMERGENCY WARNING USE.

Specifications:


SEALED PC LENS AND ALUMINUM BASED HOSING, WATER RESISTEANT, BUIT-IN 19 FLASHING PATTERNS, CAPABLE OF SIMULTANE-OUS OR ALTERNATING FUNCTION WITH MULIPLE LIGHTSHEADS, REVERSE POLARITY PROTECTION.

Operating Voltage: 12V –24V DC

Operating temperature-30C°- 60C° (-22°F– 140°F)

Order part number

F1203100: 3.5" AMBER FLASHING WARNING LIGHT, 180 DEGREE WIDE VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

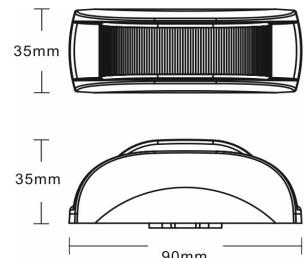

F1203200: 3.5" BLUE FLASHING WARNING LIGHT, 180 DEGREE HORIZOMTAL VIEW, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.



F1203300: 3.5" RED FLASHING WARNING LIGHT, 180 DEGREE HORIZOMTAL VIEW, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F1203400: 3.5" GREEN FLASHING WARNING LIGHT, 180 DEGREE HORIZOMTAL VIEW, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F1203500: 3.5" WHITE FLASHING WARNING LIGHT, 180 DEGREE HORIZOMTAL VIEW, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F4004100: 4" RND, AMBER FLASHING WARNING LIGHT, 270 DEGREE HORIZOMTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.



F4004200: 4" RND BLUE FLASHING WARNING LIGHT, 270 DEGREE HORIZOMTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F4004300: 4" RND RED FLASHING WARNING LIGHT, 270 DEGREE HORIZOMTAL VIEW, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.


F4004400: 4" RND GREEN FLASHING WARNING LIGHT, 270 DEGREE HORIZOMTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F4004500: 4" RND WHITE FLASHING WARNING LIGHT, 270 DEGREE HORIZOMTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANNEOUS OR ALTERNATING, SAE J845 CLASS 1. BRACKET (INCLUDE

F0403105: 3" AMBER, CONER BOLTS MOUNTING, ZINC-ALLOY CASTING HOUSING WITH PC LENS, 6 FLASH PATTERNS WITH SYNC FUNCTION. TAIL LIFT SAFETY LIGHT, 12-36 VDC



F0403505: 3" WHITE, CONER BOLTS MOUNTING, ZINC-ALLOY CASTING HOUSING WITH PC LENS, 6FLASH PATTERNS WITH SYNC FUNCTION. TAIL LIFT SAFETY LIGHT, 12-36 VDC



WARNRAY® Ultra Slim LED Strobe Light

Recharge & Portable LED Beacon Waring Light



WARNRAY® ULTRA SLIM LED STROBE LIGHT

NEW


THIS NEW GENERATION LIGHT HAS BEEN DESIGNED WITH A WATER RESISTANT, AN ULTRA SLIM SHARP AND WIDE VIEWING ANGLE. IT IS SUITABLE FOR MANY APPLICATION, SUCH AS EMERGENCY WARNING LIGHTS FOR DOT WORK TRUCKS, UTILITY TRUCKS, AND OTHER EMERGENCY VEHICLES. IT IS SAE DOT J595 CLASS 1 COMPLIANT FOR PRIMARY EMERGENCY WARNING USE.

Specifications:

SEALED PC LENS AND BASE HOUSING, WATER RESISTENT, BUILT-IN 19 FLASHING PATTERNS, CAPABLE OF SIMULTANEOUS OR ALTERNATING WITH MULTIPLE LIGHT HEADS, REVERSE POLARITY PROTECTION.

OPERATING VOLAGE: 12V –24V DC

OPERATING TEMPERATURE: -30C°- 60C° (-22°F– 140°F)

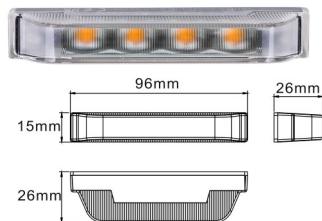

Order Part Number:


F0403100: 3.8" AMBER FLASHING WARNING LIGHT, ULTRA HORIZONTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANEOUS OR ALTERNATING, SAE J595 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F0403500: 3.8" WHITE FLASHING WARNING LIGHT, ULTRA HORIZONTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANEOUS OR ALTERNATING, SAE J595 CLASS 1. BRACKET (INCLUDED) MOUNTING.



F0605100: 3.8" AMBER FLASHING WARNING LIGHT, ULTRA HORIZONTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANEOUS OR ALTERNATING, SAE J595 CLASS 1. BRACKET (INCLUDED) MOUNTING.

F0605500: 3.8" WHITE FLASHING WARNING LIGHT, ULTRA HORIZONTAL VIEW ANGLE, 19 FLASHING PATTERNS WITH SIMULTANEOUS OR ALTERNATING, SAE J595 CLASS 1. BRACKET (INCLUDED) MOUNTING.

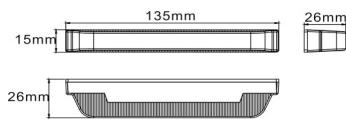

WARNRAY® PORTABLE & RECHARGEABLE LED BEACON WARNING LIGHT

NEW

PORTABLE BATTERY POWERED LED BEACON WARNING LIGHT, CONVENIENT TO STORAGE. POWER SUPPLY WITH INTERNAL RECHARGEABLE BATTERY VIA USB CABLE (INCLUDED). HIGH POWER LED WITH SUPER BRIGHTNESS, ALUMINUM BASE WITH STRONG MAGNET, TOUGH PC LENS WITH UV RESISTANT. BUILT IN 6 FLASH PATTERN ALONG WITH SOS SIGNAL. UP TO 4 HOUR PLUS OPERATION TIME.

Operating temperature -30°C to +60°C (-22° to 140°F)

Order part number

F2404100: 4" RND, 24 WATTS, PC LENS WITH UV RESISTANT, BUILT-IN 6 FLASH PATTERNS WITH MEMORY FUNCTION. IP65.

