

## NEW GENERATION LED LIFT CORNER WIDE VIEW SAFETY WARNING LIGHT NEW

THIS ROBUST LIGHT FEATURES A SLIM SOLID ZINC-ALLOY CASTING HOUSING WITH TOUGH UV-RESISTENT PC LENS, 6 FLASH PATTERNS WITH SYNC FUNCTION. TAIL LIFT SAFETY LIGHT.

### KEY FEATURES:

**OPERATION:** 12V-36VDC


**VERSATILE FLASH PATTERN:** 19 PATTERN WITH SIMULTANEOUS OR ALTERNATING MODE FOR MULTI-UNITS SETUP

**EXTREME DURABILITY:** IP67 & IP69K RATINGS FOR DUST AND WATER RESISTANCE.

**WIDE TEMPERATURE RANGE:** OPERATES FROM -30°C to +60°C (-22° to 140°F)

### Order part number

**F0403105:** 3" AMBER, CONER BOLTS MOUNTING, ZINC-ALLOY CASTING HOUSING WITH PC LENS, 6 FLASH PATTERNS WITH SYNC FUNCTION. TAIL LIFT SAFETY LIGHT, 12-36 VDC

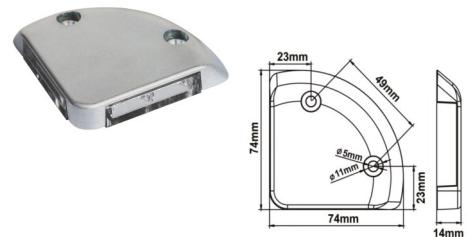

**F0403505:** 3" WHITE, CONER BOLTS MOUNTING, ZINC-ALLOY CASTING HOUSING WITH PC LENS, 6 FLASH PATTERNS WITH SYNC FUNCTION. TAIL LIFT SAFETY LIGHT, 12-36 VDC


## PORTABLE & RECHARGEABLE LED BEACON WARNING LIGHT NEW

PORTABLE BATTERY POWERED LED BEACON WARNING LIGHT, CONVENIENT TO STORAGE. POWER SUPPLY WITH INTERNAL RECHARGEABLE BATTERY VIA USB CABLE (INCLUDED). HIGH POWER LED WITH SUPER BRIGHTNESS, ALUMINUM BASE WITH STRONG MAGNET, TOUGH PC LENS WITH UV RESISTANT. BUILT IN 6 FLASH PATTERN ALONG WITH SOS SIGNAL. UP TO 4 HOUR PLUS OPERATION TIME.

Operating temperature -30°C to +60°C (-22° to 140°F)

### Order part number

**F2404100:** 4" RND, 24 WATTS, PC LENS WITH UV RESISTANT, BUILT-IN 6 FLASH PATTERNS WITH MEMORY FUNCTION. IP65.



## 45 DEGREE DOWN WALLMOUNT AREA LIGHTING

### Order Number:

**W0906500:** 6" Oval, White High Intensity LED Heavy-Duty Work light, Bolts Wall Mount 1600 Lumen With 45 Degree Down Angle Area Lighting. Tough PC Lens With UV Resistant

