

NEW GENERATION LED WORK WITH AMBER FLASH WARNING LIGHT

NEW

THIS ROBUST LIGHT FEATURES A SOLID DIE-CAST ALUMINUM BASE FOR EXCELLENT HEAT DISSIPATION. A SPECIAL COATING TECHNIQUE PROVIDES EXTRA-LONG SALT SPRAY RESISTENCE. THE HOUSING IS EQUIPPED WITH A BREATHABLE VALVE AND USES TOUGH UV-RESISTENT PC LENS AND 304 STAINLESS STEEL SCREWS AND BRACKETS.

KEY FEATURES:

HIGH OUTPUT: 1700 LUMENS

VERSATILE FLASH PATTERN: 19 PATTERN WITH SIMULTANEOUS OR ALTERNATING MODE FOR MULTI-UNITS SETUP


EXTREME DURABILITY: IP67 & IP69K RATINGS FOR DUST AND WATER RESISTANCE.

WIDE TEMPERATURE RANGE: OPERATES FROM -30°C to +60°C (-22° to 140°F)

Order part number

W1104500: 4" ROUND, LED WORK LIGHT, PC LENS, STAINLESS STEEL MOUNTING BRACKET, 1700LM, ONE FOOT CABLE WIRE OPEN END, 12VDC-36VDC

W1104510: 4" SQUARE, LED WORK LIGHT, PC LENS, STAINLESS STEEL MOUNTING BRACKET, 1700LM, ONE FOOT CABLE WIRE OPEN END, 12VDC-36VDC

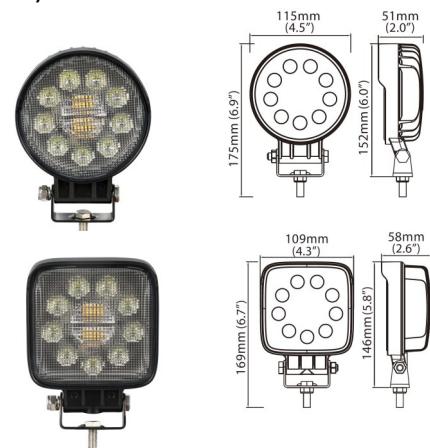

MULTI PURPOSE LED WORK LIGHT WITH TWO AMBER STEADY BURN & 4X WARNING FUNCTION

NEW

Special design new generation high output work light with two-sided amber color, steady burn, or 4X flashing warning light for working truck operations. Sealed PMMA lens, aluminum housing, water resistant IP67, along with steel mounting bracket. 8" 3 wires open end cable.

Operating voltage: 12V-24VDC

Operating temperature -30°C to +60°C (-22° to 140°F)

Order part number

W1204510: 4" X 3", LED WORK LIGHT, 1800 LM, 24 WATTS, PMMA LENS, FLOOD BEAM, STEEL MOUNTING BRACKET, 12V-24VDC.

