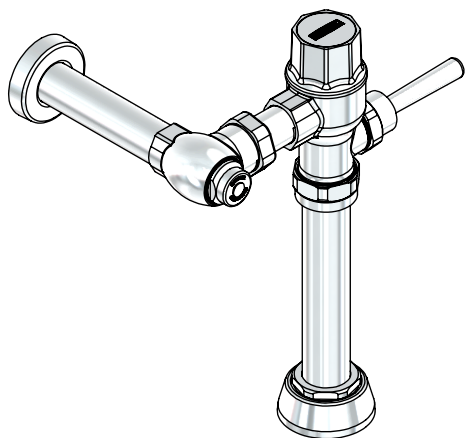


**PRODUCT FEATURES:**

Mechanical water closet flushometer valve with lever to generate a complete flushing.
With two anti-theft systems.
Titanium-coated lever with antibacterial action.
Adjustable tailpiece.
Easy installation and maintenance.
High efficiency.
Vacuum breaker for back-flow protection.
Left or right installation.
This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

MATERIALS:

Solid brass, for durability and reliability.
Ultra-high resistance to corrosion and tarnishing finishings.

INCLUDED COMPONENTS:

1" x 1"- 11 1/2 NPT sweat solder adapter.
1 1/2" vacuum breaker.
5/64" allen wrench.

INSTALLATION:

Ø1" pipe water supply line.
In floor-mounted or wall-hung 1-1/2" top spud bowls.

OPERATION:

Push the lever for a discharge to 1,6 GPF

CODES AND STANDARDS:




EPA WaterSense Specification for
Flushometer-Valve Water Closets (Version 1.0)
ASSE 1037/ASMEA112.1037/CSA B125.37
CEC/DOE-ENERGY POLICY ACT 1992

FINISHES:

PC Polished Chrome

Exposed Manual WC Flushometer Valve, 1,6 GPF

Estimated Dimensions Dim. inch. [mm]

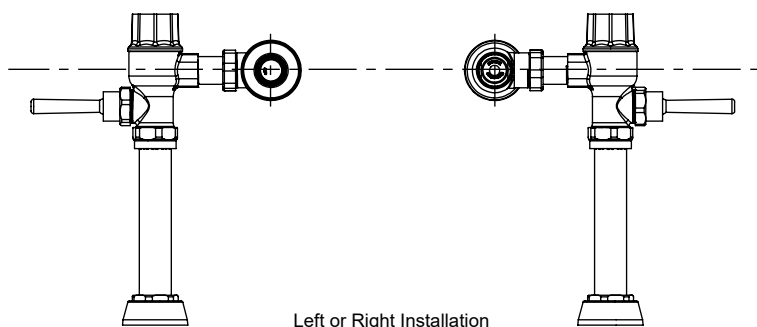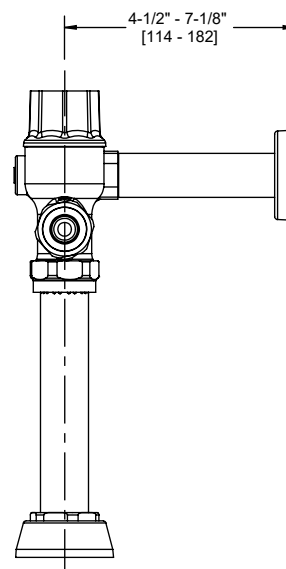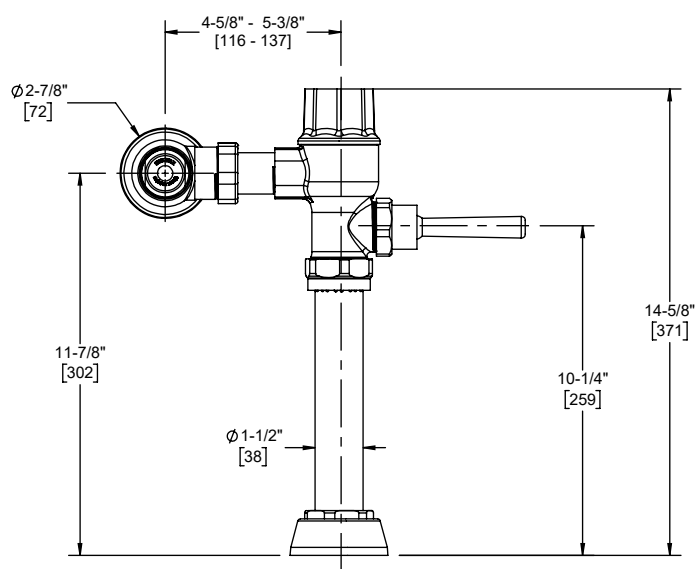

WORKING PRESSURE:

Pmin.= 20 PSI

 $P_{max.} = 125 \text{ PSI}$

MAXIMUM FLOW RATE:

1,6 GPF

NOTES:

Install the product according to the Installation Guide.