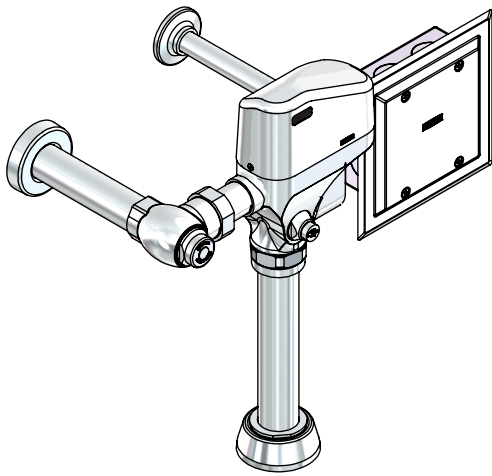


**PRODUCT FEATURES:**

Water closet flushometer valve with automatic activation sensor of electrical current and mechanical manual over-ride button to generate a complete flushing without power.

With two anti-theft systems.

Touch free and hygienic operation.

Titanium-coated button with antibacterial action.

Adjustable tailpiece.

Easy installation, maintenance and sensor detection adjustment.

High efficiency.

Vacuum breaker for back-flow protection.

Left or right installation.

This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

MATERIALS:

Solid brass, for durability and reliability.

Ultra-high resistance to corrosion and tarnishing finishes.

INCLUDED COMPONENTS:

Ø1" Solder adapter.

1 1/2" vacuum breaker.

6 VDC power adapter.

5/64" allen wrench.

SPECIFICATONS:

6 VDC

3 W Power

INSTALLATION:

Ø1" pipe water supply line.

In floor-mounted or wall-hung 1-1/2" top spud bowls.

OPERATION:

Automatic detection with a proximity sensor.

When the user leaves the sensor detection zone, in 2,5 s the system automatically flushes 1,6 GPF.

Includes a mechanical manual over-ride button to generate a flushing without power.


CODES AND STANDARDS:

EPA WaterSense Specification for
Flushometer-Valve Water Closets (Version 1.0)
ASSE 1037/ASMEA112.1037/CSA B125.37
CEC/DOE-ENERGY POLICY ACT 1992

FINISHES:

PC Polished Chrome

Estimated Dimensions Dim. inch. [mm]

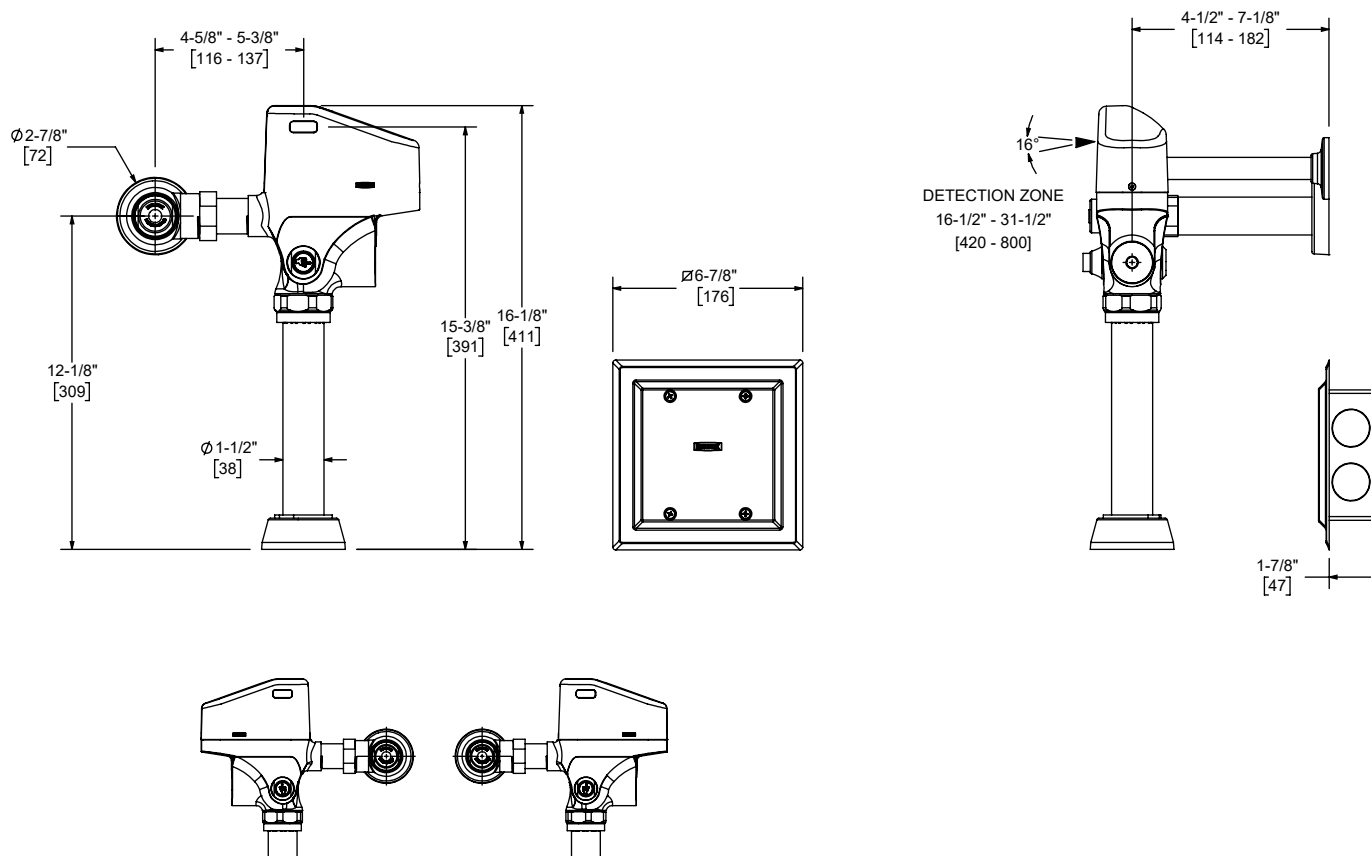

Left or Right Installation

WORKING PRESSURE:

Pmin.= 35,56 PSI

Pmax.= 80 PSI

MAXIMUM CONSUMPTION:

1,6 GPF



NOTES:

Install the product according to the Installation Guide.