




MEGALINK 2 EUROPE MOBILE UNIT INFORMATION

Updated 07/27/2026

NEPGROUP.COM

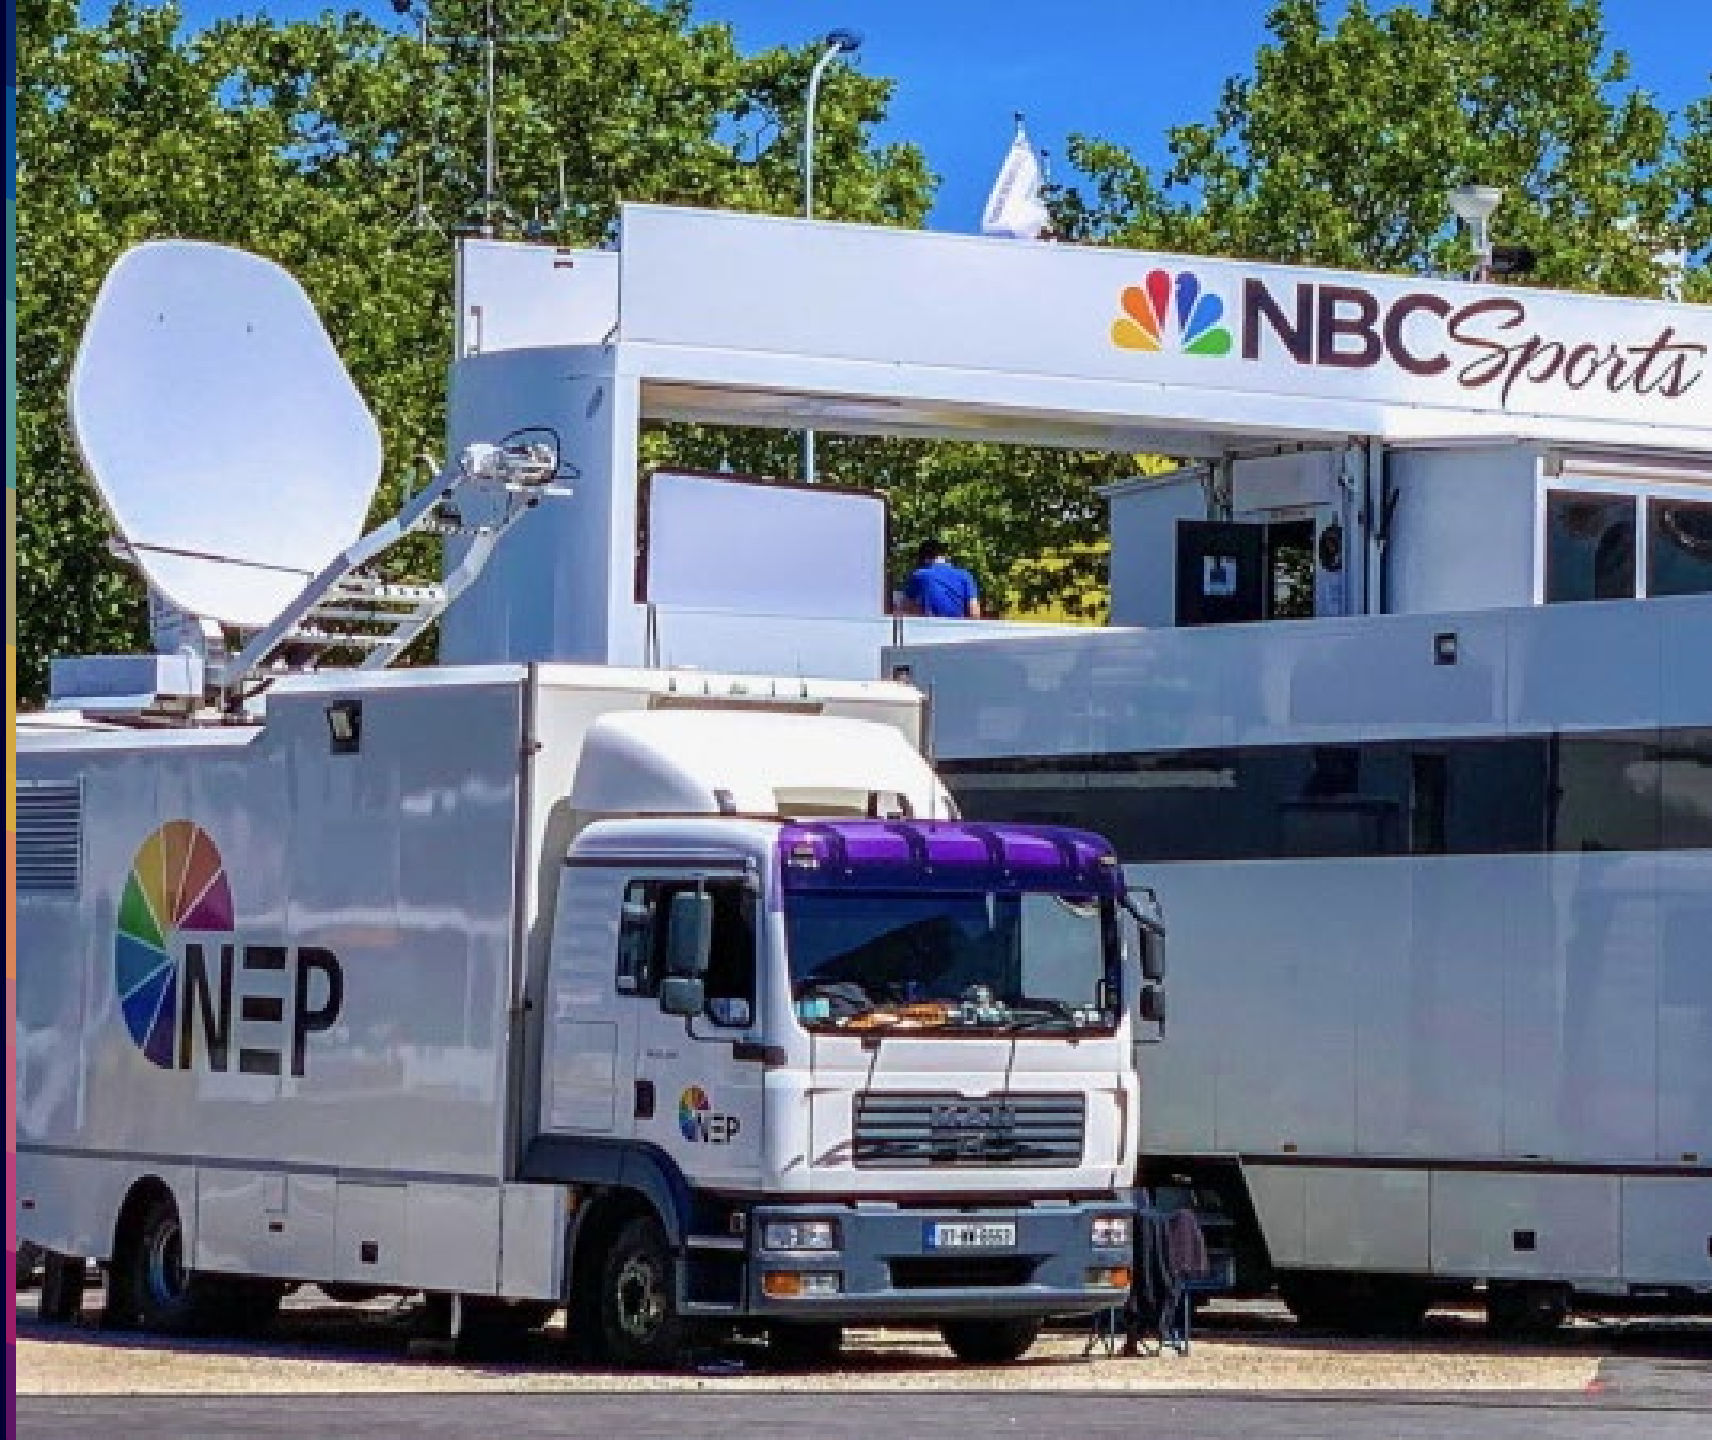

Single Trailer Unit

MEGALINK 2: TECHNICAL SPECIFICATIONS

- 3 CAMERA OB WITH FULL CAMERA CONTROL USING RCP 720/75
- WIRED FOR TRIAX CONNECTION OR SMPTE FIBRE
- 6 CHANNEL HD/SD VISION MIXER
- 16 CHANNEL YAMAHA LS9 ANALOGUE SOUND DESK
- 16 X 16 HD/SD VISION ROUTER
- PRODUCTION DESK WITH 2 X 24 INCH QUAD SPLIT MONITORS
- ZAHL AIR 4 PRODUCTION TALKBACK PANEL
- 2 X 17 INCH QUAD SPLIT MONITORS FOR TECH POSITIONS
- ZAHL AIR 8 TECHNICAL POSITION TALKBACK PANEL.
- EVS OR VT POSITION
- VEHICLE DIMENSIONS 6.9 M X 2.7M X 3.2 M
- VEHICLE REG 10D25036?SATELLITE UPLINK SPECIFICATION
- TRUCK IS EUTELSAT REGISTERED AS UKI 510
- IGP 1.2 M DISH AND CONTROLLER
- 2 X E2V 150-WATT TWTA ROOF MOUNTED AMPS
- 2 X HD MPEG 4 CODER/MODULATORS
- HP SPECTRUM ANALYSER
- TANDBERG RX 1290 IRD
- HD DTT RX
- ASTRA SATELLITE RX
- GSM IFB XXXXXXXXXX
- ISDN CODEC
- INTEGRATED TALKBACK BASESTATION WITH 2 X ROOF MOUNTED UHF DIPOLES
- 2 X 5 M SCAFFOLD DIAMETER POLES CAN BE MOUNTED FOR ADDITIONAL AERIALS OR FLYING CABLES.
- FISCHER PANDA ON BOARD GENERATOR
- HYDRAULIC STABILISATION JACKS.
- 32 AMP SINGLE PHASE INPUT.