

ESD Occupational Shoes uni6
Low shoe black ESD



Art. 36721 uni6



- Size 35-48
- CE, EN ISO 20347:2012, O1, FO, SRC
- Velours with breathable textile inlays, black
- Breathable lining with Silver ions
- Instep area with lacing
- Foamed PU midsole
- Slip resistance TPU outsole sole
- Replaceable Active Comfort Insole (art. 352510)
- ESD dissipative according to DIN EN 61340
- Reflective material

CLIMATE CLASS 1



TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational Shoes uni6 Low shoe black ESD



Art. 36761

uni6



CLIMATE CLASS 1



TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes uni6
Low shoe white ESD



Art. 36772

uni6



CLIMATE CLASS 1



TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes uni6
Low shoe blue ESD



Art. 36773

uni6



CLIMATE CLASS 1




TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48

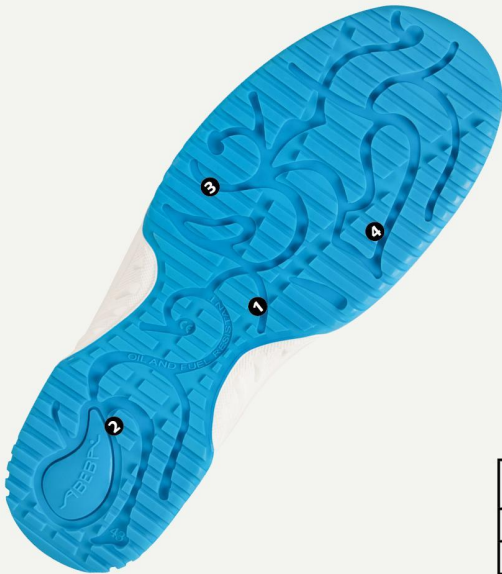

	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes uni6
Low shoe orange ESD



Art. 36774

uni6



CLIMATE CLASS 1




TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48

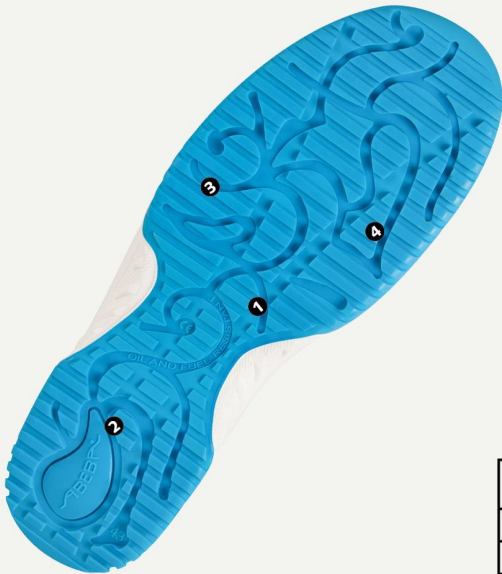

	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes uni6
Low shoe anthracite ESD



Art. 36775

uni6

- ▶ Size 35-48
- ▶ CE, EN ISO 20347:2012, O2, FO, SRC
- ▶ Knitted textile , anthracite
- ▶ Breathable lining with Silver ions
- ▶ Instep area with lacing
- ▶ Foamed PU midsole
- ▶ Slip resistance TPU outsole sole
- ▶ Replaceable Active Comfort Insole (art. 352510)
- ▶ ESD dissipative according to DIN EN 61340
- ▶ Protection against splash water



CLIMATE CLASS 1



TECHNOLOGY

OUTSOLE

- 1_ ESD dissipative according to DIN EN 61340
- 2_ SRC slip resistance according to EN ISO 20347:2012
- 3_ Animal fats and oil resistant
- 4_ Fuel resistance

352510
Size 35-48



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

Occupational Shoes uni6
Low shoe black



Art. 36776

uni6



TECHNOLOGY

OUTSOLE

- 1_Antistatic
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Animal fats and oil resistant
- 4_Fuel resistance

352510
Size 35-48



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes x-light
Lace-up shoe white ESD



Art. 7131126 *x-light*

- ▶ Size 35-48
- ▶ CE, EN ISO 20347:2012, O2, FO, SRC
- ▶ Microfibre, white
- ▶ Breathable lining with Silver ions
- ▶ Instep area with lacing
- ▶ Slip resistance PU outsole sole
- ▶ Replaceable Active Comfort Insole (art. 351610)
- ▶ ESD dissipative according to DIN EN 61340



CLIMATE CLASS 1



TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Lightweight PU-sole with high slip resistance and shock absorption
- 4_Fuel resistance

351610

Size 35-48 (closed)

351710

Size 35-48 (open)



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$

ESD-Occupational shoes x-light
Lace-up shoe black ESD



Art. 7131127 *x-light*



 **CLIMATE CLASS 1**



TECHNOLOGY

OUTSOLE

- 1_ESD dissipative according to DIN EN 61340
- 2_SRC slip resistance according to EN ISO 20347:2012
- 3_Lightweight PU-sole with high slip resistance and shock absorption
- 4_Fuel resistance

351610

Size 35-48 (closed)

351710

Size 35-48 (open)



	Product qualification DIN EN 61340-5-1:
test method	IEC 61340-5-1
limit values	$R \leq 10^8 \Omega$
average value	$R = 10^7 \Omega$