


TRAFA AUXILIARY TRANSFORMER 24/48V  
 1-phase with separated windings.  
 Rated primary tensions: 230 - 400 - 460 Volts.  
 provided with +/- 5% taps (based on 400 Volts)  
 Frequency 50/60 Hz.  
 Rated secondary voltages:  
 24 / 48 Volts by means of parallel- or serialconnection.  
 Insulationclass B, max. ambient temperature 45°C  
 Connections: transformer terminals.  
 Open version for built-in use.

TYPENUMBER	TRAFA INTERNAL	POWER RATING in VA	PRICE PER PIECE in €
124025	8160501/42	25	19
124040	8160502/56	40	22
124063	8160503/70	63	33
124100	8160504/84	100	36
124160	8160505/98	160	57
124250	8160506/12	250	77
124400	8160507/26	400	99
124630	8160508/40	630	114
121000	8160509/54	1000	146
121600	8160510/15	1600	211

ALSO APPLICABLE TO: GENERAL CONDITIONS PAGE AK-1000-xx (LATEST EDITION)

EDITION JANUARY 2026

PRICELIST PR-3212-05

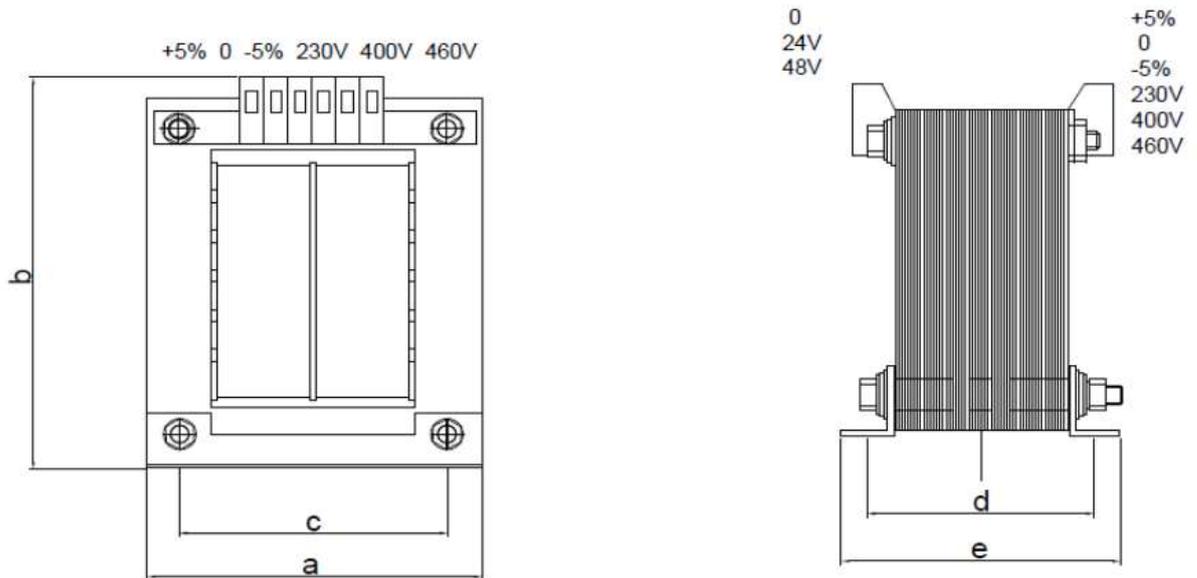

Type	VA	a	b	c	d	e	Mount	kg.
124025	25	55	83	44	40	52	M3	0.9
124040	40	55	83	44	50	62	M3	1.0
124063	63	65	95	50	46	60	M4	1.2
124100	100	70	101	56	63	76	M4	2.2
124160	160	80	115	64	65	78	M4	2.6
124250	250	100	137	76	61	75	M4	4.1
124400	400	100	137	76	93	106	M4	7.1
124630	630	125	168	90	80	96	M5	7.5
121000	1000	125	168	90	123	136	M5	13.0
121600	1600	145	192	104	139	155	M5	19.5