


TRAFA AUXILIARY TRANSFORMER MODEL STU 690/230Volt
 1-phase with separated windings.
 Rated primary tensions 690 Volts.
 Frequency 50/60 Hz.
 Rated secondary tension 230 Volts.
 Provided with static shield.
 According ships rules ABS, BV, DNV, GL,
LROs (with certificate nr. 06/30001 (E4)),
 RINA, IEC 92, as far as applicable.
 Insulationclass E, max. ambient temperature 45°C
 Connections: transformer terminals.
 Open version for built-in use.
 Dimensions according drawing page 101-11.

TYPENUMBER	TRAFA INTERNAL	RATING in VA	PRICE PER PIECE in €
690040	6161207/53	40	29
690063	6161201/69	63	36
690100	6161202/83	100	45
690160	6161205/25	160	64
690250	6161206/39	250	67
690400	6161204/11	400	98
690630	6161203/97	630	102
691000	6161208/07	1000	131
691600	6161209/81	1600	187

ALSO APPLICABLE: GENERAL CONDITIONS PAGE AK-1000-xx (LATEST EDITION)

EDITION JANUARY 2026

PRICELIST PR-3223-11

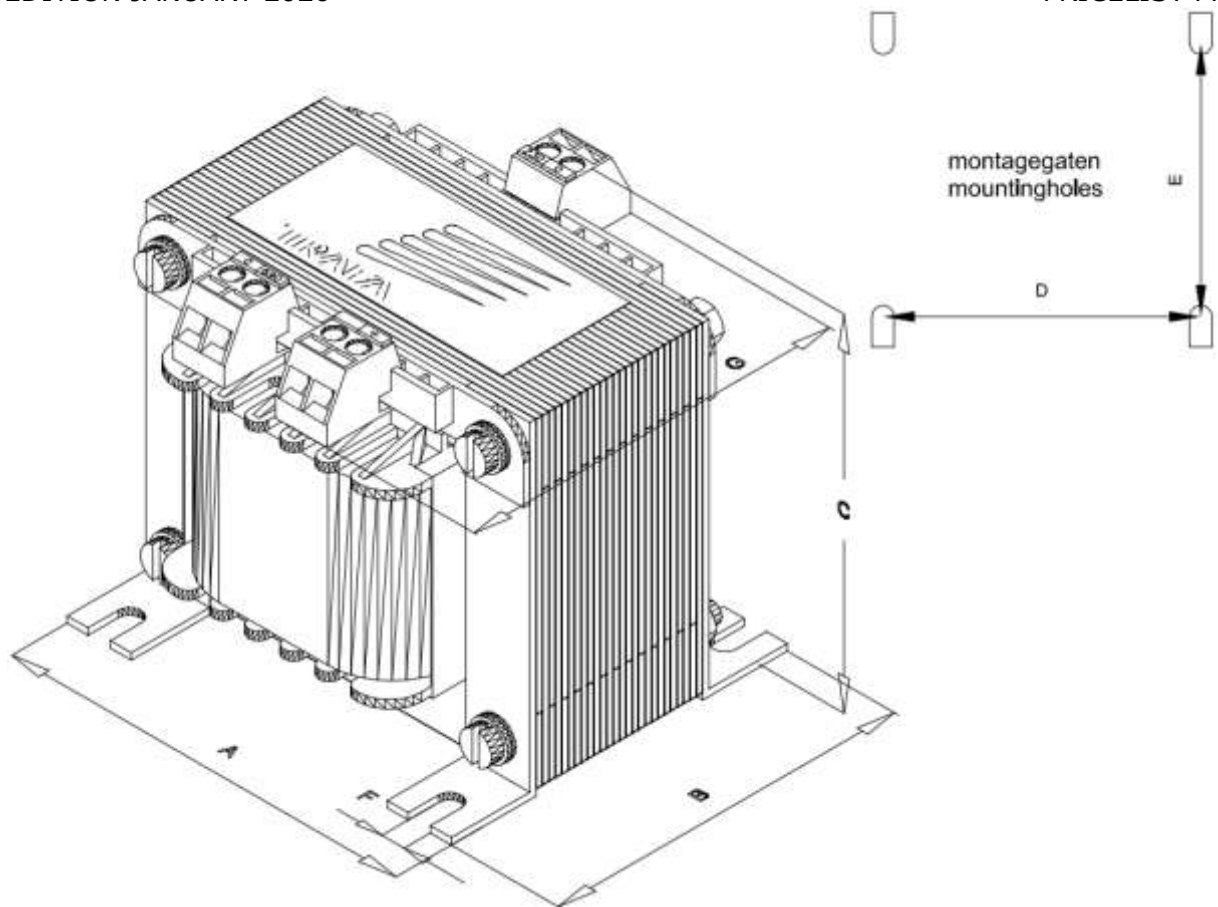

Type	VA	A	B	C	D	E	F	G	kg.
690040	40	84,0	78,0	80,0	70,0	63,0	5,0	85,5	1,4
690063	63	84,0	92,0	80,0	70,0	77,0	5,0	99,5	2,0
690100	100	96,0	98,0	90,0	80,0	83,0	5,0	102,0	2,6
690160	160	120,0	94,5	110,0	100,0	75,5	7,0	102,0	3,8
690250	250	120,0	106,5	110,0	100,0	87,5	7,0	111,0	4,9
690400	400	150,0	103,5	131,0	125,0	84,5	7,0	109,0	7,4
690630	630	150,0	121,0	131,0	125,0	101,5	7,0	126,0	9,8
691000	1000	150,0	146,0	130,0	125,0	130,0	7,0	150,0	13,7
691600	1600	174,0	170,0	157,0	145,0	145,0	7,0	147,0	20,5