


Grove GMK 4100L-2: Arbeitsbereich



Traglasttabelle in t
 Maschine abgestützt 7.2 m

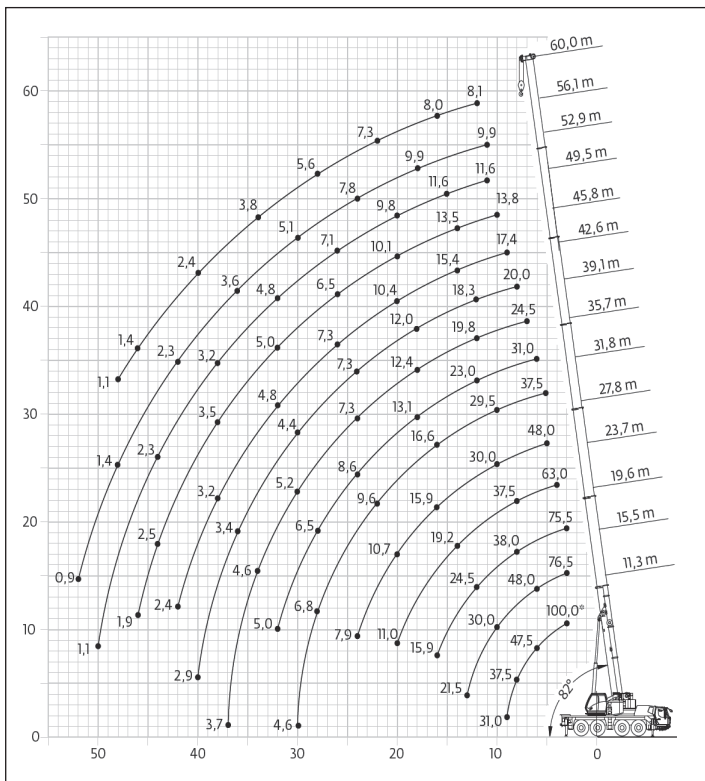

GMK 4100L-2
 26 t Gegengewicht

Arbeits- radius in m	Hauptauslegerlängen in m										
	19.60	23.70	27.80	31.80	35.70	39.10	42.60	45.80	49.50	56.10	60.00
3.0	75.5										
4.0	63.5	62.5									
5.0	55.0	55.0	48.0	37.5							
6.0	48.0	48.0	45.5	37.5	31.0						
7.0	42.5	42.0	42.0	26.0	31.0	24.5					
8.0	38.0	37.5	38.0	33.5	30.0	24.5	20.0				
9.0	33.5	33.0	33.5	31.5	28.5	24.0	20.0	17.4			
10.0	29.5	29.5	30.0	29.5	27.0	22.5	20.0	17.4	13.8		
11.0	26.5	27.0	26.5	26.0	25.5	21.5	19.3	17.3	13.8	9.9	
12.0	24.5	24.5	23.5	23.5	23.0	19.8	18.3	16.8	13.8	9.9	8.1
13.0	22.0	22.0	21.5	21.0	21.0	18.6	17.3	16.2	13.8	9.9	8.1
14.0	19.4	19.2	19.9	18.7	18.8	17.5	16.3	15.4	13.5	9.9	8.1
15.0	17.2	17.2	17.7	17.6	17.1	16.2	15.4	14.7	12.9	9.9	8.1
16.0	15.9	16.1	15.9	16.6	15.6	14.8	14.4	14.0	12.4	9.9	8.0
18.0		13.2	12.9	13.6	13.1	12.4	12.0	12.2	11.3	9.9	7.9
20.0		11.0	10.7	11.3	11.2	10.5	10.2	10.4	10.1	9.3	7.7
22.0			9.0	9.6	10.0	8.7	8.7	8.9	8.6	8.7	7.3
24.0			7.9	8.8	8.6	7.3	7.3	7.9	7.4	7.7	6.6
26.0				7.7	7.4	6.2	6.2	7.3	6.5	6.7	6.1
28.0				6.8	6.5	5.6	5.2	6.4	5.9	5.9	5.6
30.0				4.6	5.6	5.2	4.6	5.5	5.5	5.1	5.0
32.0					5.0	4.8	4.3	4.8	5.0	4.5	4.4
34.0						4.6	3.9	4.2	4.4	4.2	3.8
36.0						3.9	3.6	3.7	3.8	3.6	3.3
38.0						3.7	3.4	3.2	3.5	3.1	2.8
40.0							3.1	2.8	3.2	2.7	2.4
42.0							2.9	2.4	2.9	2.3	2.0
44.0									2.5	2.0	1.7
46.0									1.9	1.7	1.4
48.0										1.4	1.1
50.0										1.2	