


210160 STANDARD SEALS - VICTAULIC




TWO-way ball valve
Drive: Inox lever
Connection: VICTAULIC
Flow: Full
Material: Aisi 316L (1.4404)
Measure: from da DN20 to DN100
Seals: Modified Virgin P.T.F.E.
Operating temperature: -20°C+170°C
Outer finish: Sandblasted

On request:
Antistatic device ATEX:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T135°C Db
M.O.C.A. CE 1935/2004
• Seals made of:
PTFE with glass -20°C+170°C
PTFE with carbographe -20°C+180°C
PTFE with inox -20°C+200°C
UHMW High-molecular weight polyethylene -20°C+80°C

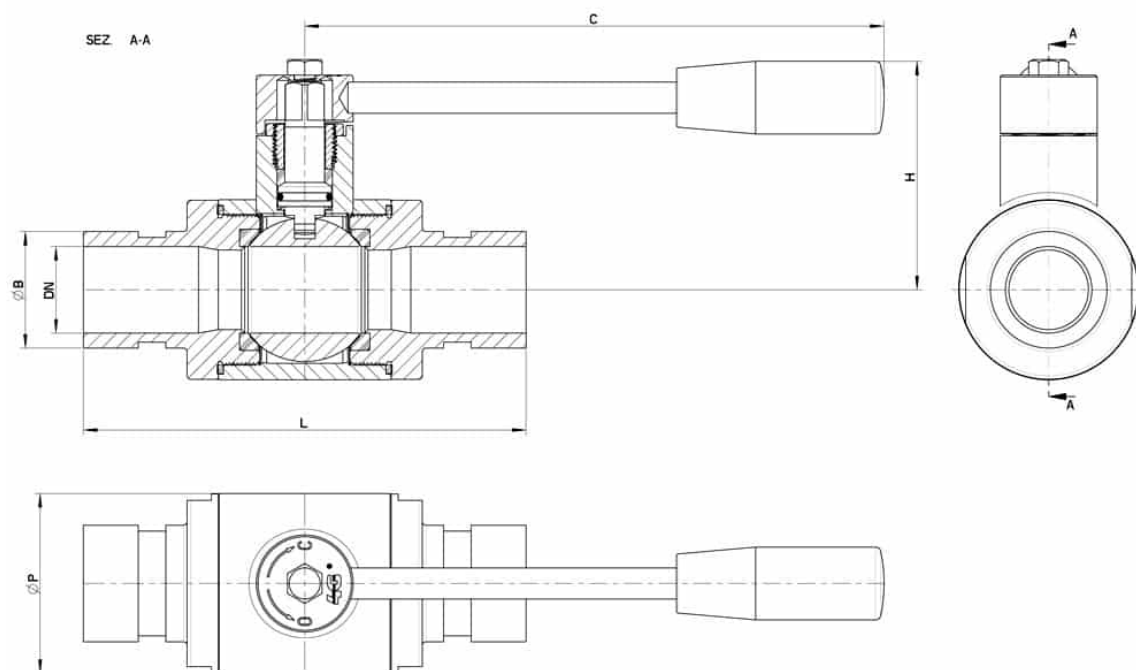

VICTAULIC	DN	L	ØB	H	C	ØP	PN	Kg	CODE AISI 316L
3/4" x 26,9	20	126	26.9	59	110	42	100	0.78	210160 62010
1" x 33,7	25	128	33.7	66	160	52	64	1.22	210160 62610
1"1/4 x 42,4	32	134	42.4	71	160	60	64	1.53	210160 63010
1"1/2 x 48,3	40	148	48.3	96	190	73	64	2.43	210160 63410
2" x 60,3	50	158	60.3	104	190	89	40	3.68	210160 63810
2"1/2 x 73	65	172	73	119	225	113	40	5.98	210160 64410
2"1/2 x 76.1	65	172	76.1	119	225	113	40	--	210160 64510
3" x 88,9	80	194	88.9	130	290	136	40	9.12	210160 64810
4 x 114,3	100	206	114.3	144	325	167	25	14.9	210160 65410

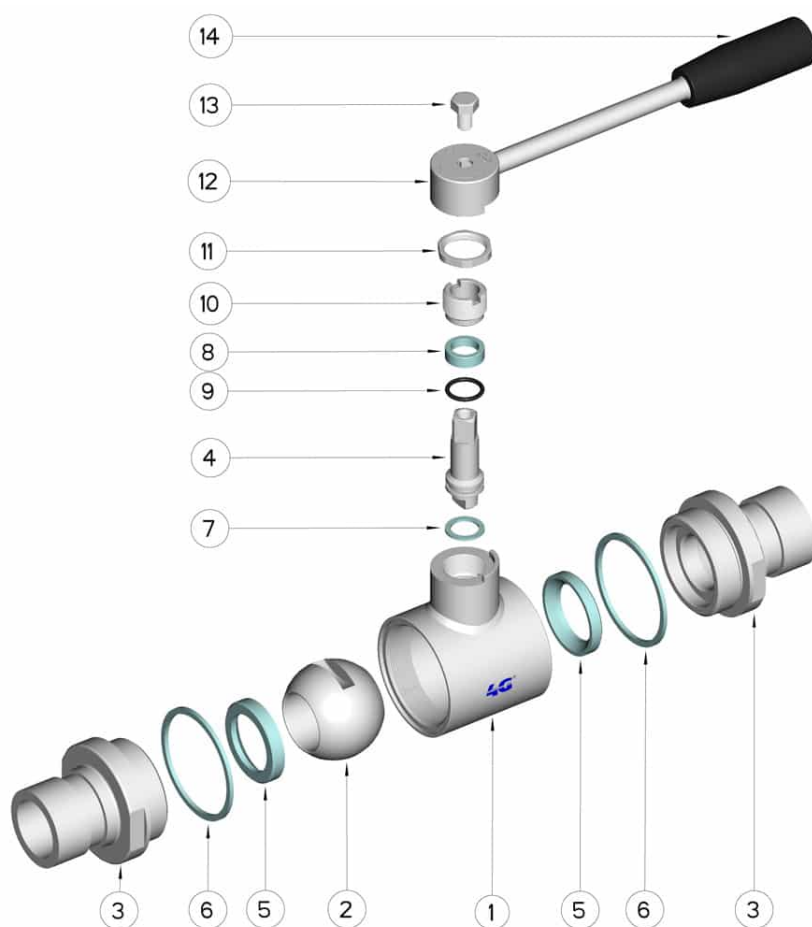

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	2	AISI 316L
4	Stem	1	AISI 316L
5	Ball Seals	2	PTFE Vergine Modificato
6	Sleeve Seals	2	PTFE
7	Stem Seal	1	PTFE
8	Stem Seal	1	PTFE
9	Stem or-Seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Nut	1	AISI 304L
12	Washer	1	AISI 304L
13	Lever	1	AISI 304L
14	Handle	1	DUROPLAST (PF)

