



Wireless and LAN interface options available

RS-232 Cable / RD-232C-75 or RS-485 Cable
(supplied by others)

**Mini-Me™
Remote Display**
MMRD7 Series

(MMRD7-PK power cord kit version shown, MMRD7-HW
hardwired version & MMRD7-SS outdoor version
also available)




Overfill Alarm
RAS-1-NYS



**PROTEUS® X
ATG Controller**
OEL8000IIIXP-5



RS-232 or RS-485 connection (supplied by others)

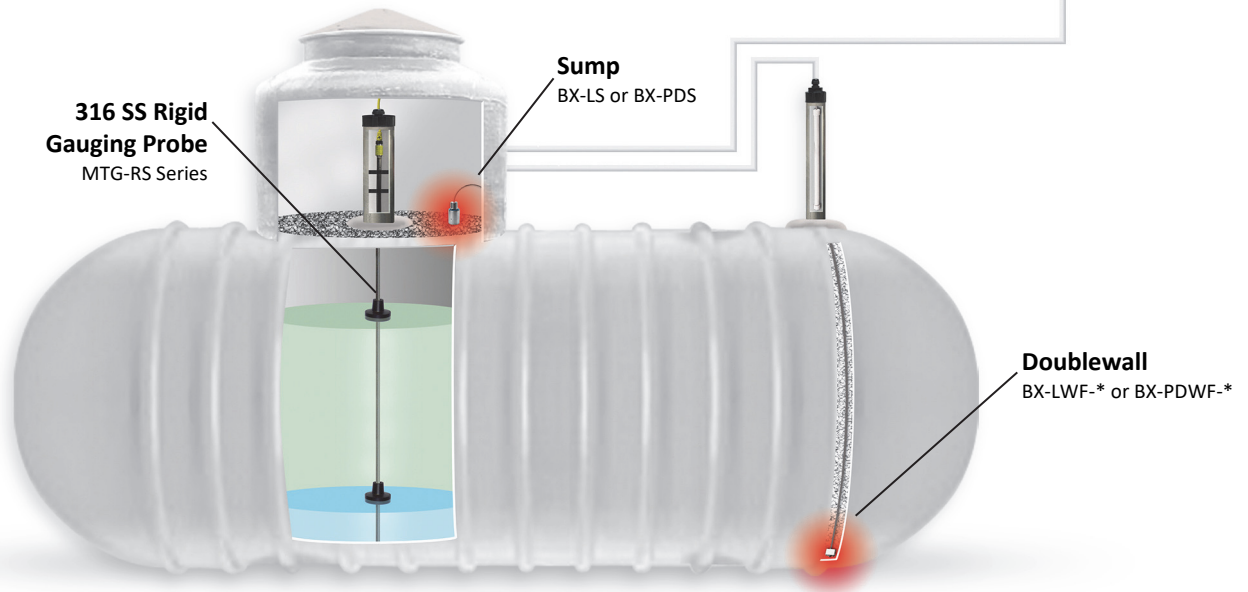

SYSTEM PARTS LIST

OEL8000IIIX-5	PROTEUS X Gen IV Tank Gauging Controller - Color 7" graphic display with capacitive touch screen, (1) RS-232 port, (1) configurable RS-232/RS-485 ports, Ethernet and (5) 6 amp relays. Accepts up to 40 MTG Series inventory probes and 64 BX Series leak sensors.
OEL8000IIIXP-5	(same as above but includes printer)
MTG-RS Series	Magnetostrictive probe (*denotes probe length, price for up to 132" overall length). Consult factory for alternate probes sizes and styles.
BX-LS	Sump sensor or doublewall sensor for steel tanks 8 feet and under.
BX-PDS	(product distinguishing version)
BX-LWF-*	Doublewall sensor (*denotes tank diameter).
BX-PDWF-*	(product distinguishing version)
MMRD7 Series	PROTEUS Mini-Me universal remote ATG monitor - Color 7" graphic display with capacitive touch screen for audio/visual alarms and current inventory.
RAS-1-NYS	Common overfill remote annunciator in NEMA 4X enclosure, with acknowledgement switch, 100db horn, and high intensity strobe light.

OPTIONAL ACCESSORIES

MB-232/485	Configurable RS-232 or RS-485 option board for PROTEUS controller.
XB-416	4 probe 16 leak sensor output board (1 included)
XB-400	4 probe output board
XB-800	8 probe output board
XB-RB8	8 relay output board rated at 5 amps 120 VAC
X232-420	External RS-232 to 4-20 mA converter
C232-BAC	RS-232 BACnet TCP/IP converter (RS-485 version available)
WRS-232	Wireless link