




PROTEUS OEL8000IIIK4 SERIES ABOVE GROUND TANK BASICS

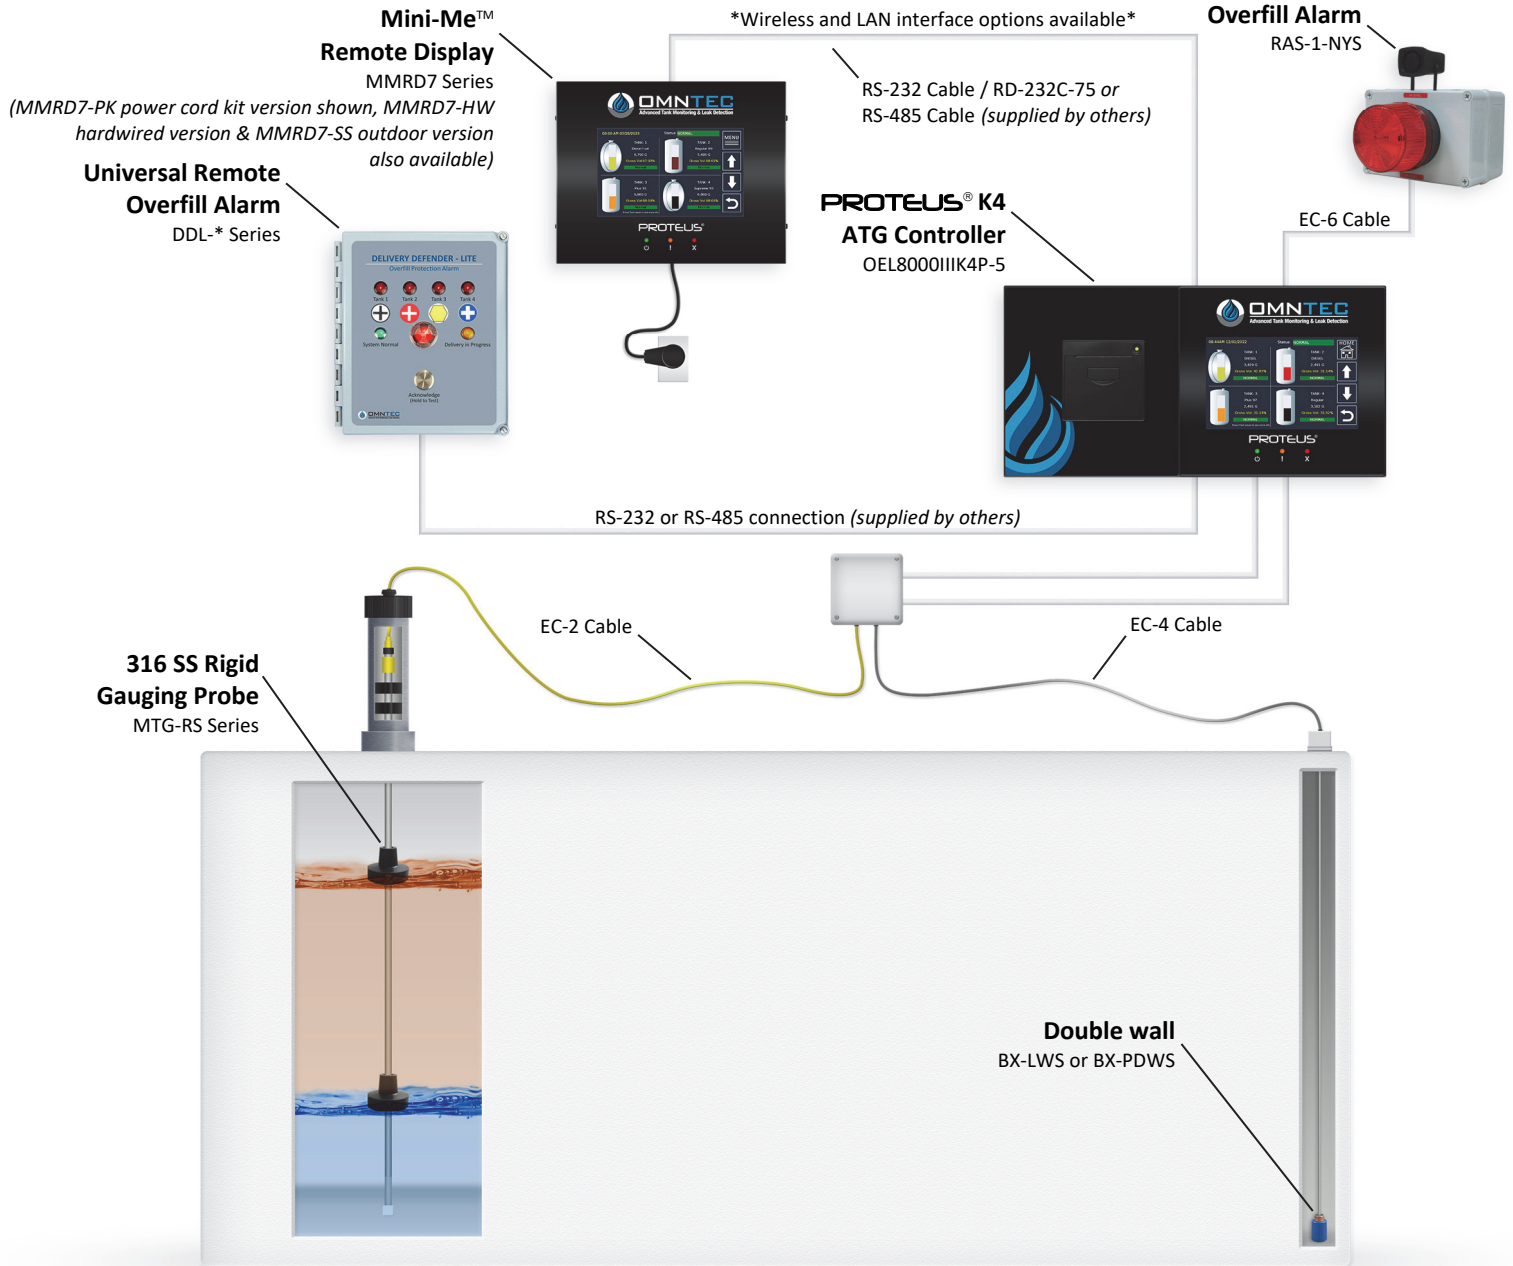

SYSTEM PARTS LIST

OEL8000IIIK4-5	PROTEUS K4 Gen IV Tank Gauging Controller - Color 7" graphic display with capacitive touch screen, (1) RS-232 port, (2) optional configurable RS-232/RS-485 ports, Ethernet and (5) 6 amp relays. Accepts up to 4 MTG Series inventory probes and 16 BX Series leak sensors.
OEL8000IIIK4P-5	(same as above but includes printer)
MTG-RS Series	Magnetostrictive probe (*denotes probe length, price for up to 132 inches overall length). Consult factory for alternate probes sizes and styles.
BX-LWS**	Sensor for monitoring the dry interstice of double wall steel tanks. Comes with 25' of cable.
BX-PDWS**	(product distinguishing version) **For tanks less than 8' diameter, a BX-LS or BX-PDS can be used.
MMRD7 Series	PROTEUS Mini-Me universal remote ATG monitor - Color 7" graphic display with capacitive touch screen for audio/visual alarms and current inventory.
DDL-* Series	Delivery Defender Lite universal remote overfill alarm for up to four tanks with lights for hi level, system normal, delivery in progress, acknowledge/test switch and audio/visual horn. (*denotes number of tanks)
RAS-1-NYS	Common overfill remote annunciator in NEMA 4X enclosure, with acknowledgement switch, 100db horn, and high intensity strobe light.

OPTIONAL ACCESSORIES

MB-232/485	Configurable RS-232 or RS-485 option board for PROTEUS controller.
X232-420	External RS-232 to 4-20 mA converter
C232-BAC	RS-232 BACnet TCP/IP converter (RS-485 version available)
WRS-232	Wireless link