



**Mini-Me™
Remote Display**
MMRD7 Series



RS-232 Cable / RD-232C-75 or
RS-485 Cable (supplied by others)

Wireless and LAN interface options available

(MMRD7-PK power cord kit version shown,
MMRD7-HW hardwired version &
MMRD7-SS outdoor version also available)

**PROTEUS® K4
ATG Controller**
OEL8000IIIK4P-5




Overfill Alarm
RAS-1-NYS

EC-6 Cable

EC-2 Cable

EC-4 Cable

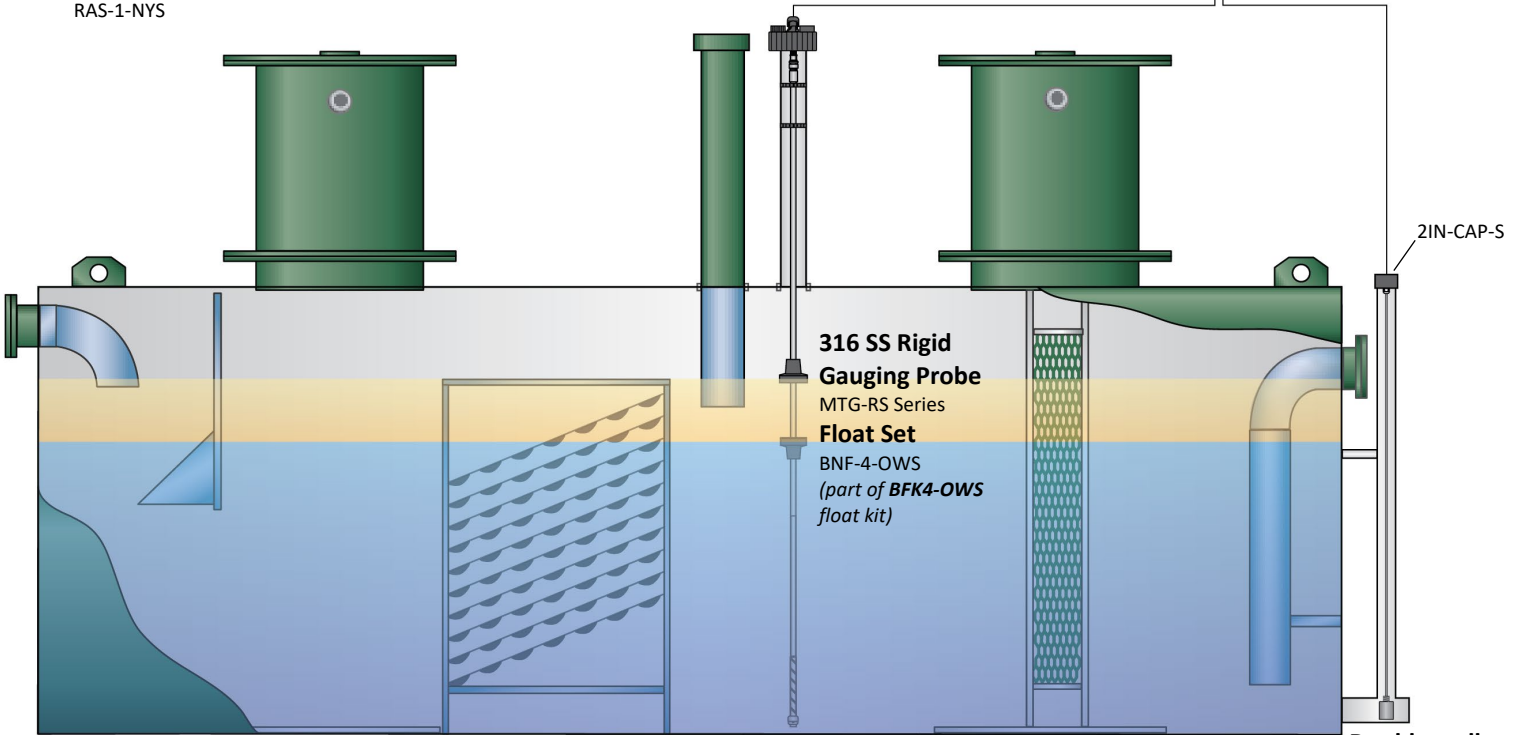

Double wall
BX-LWS or BX-PDWS

SYSTEM PARTS LIST

OEL8000IIIK4-5	PROTEUS K4 Gen IV Tank Gauging Controller - Color 7" graphic display with capacitive touch screen, (1) RS-232 port, (2) optional configurable RS-232/RS-485 ports, Ethernet and (5) 6 amp relays. Accepts up to 4 MTG Series inventory probes and 16 BX Series leak sensors.
OEL8000IIIK4P-5	(same as above but includes printer)
MTG-RS Series	Magnetostrictive probe (*denotes probe length, price for up to 132 inches overall length). Consult factory for alternate probes sizes and styles.
BFK4-OWS	4" Buna N float kit for OWS tanks. Kit includes float set, 6' yellow cable, spacers, 4" cap, SK-4 sealing kit, white clips and cathodic boot.
BFK2-OWS	2" Buna N float kit for OWS tanks. Kit includes float set, 6' yellow cable, spacers, 2" cap, SK-4 sealing kit, white clips and cathodic boot.
BX-LWS**	Sensor for monitoring the dry interstice of double wall steel tanks. Comes with 25' of cable.
BX-PDWS**	(product distinguishing version) **For tanks less than 8' diameter, a BX-LS or BX-PDS can be used.
2IN-CAP-S	2" Cap for sensors
RAS-1-NYS	Common overfill remote annunciator in NEMA 4X enclosure, with acknowledgement switch, 100db horn, and high intensity strobe light.

OPTIONAL ACCESSORIES

MB-232/485	Configurable RS-232 or RS-485 option board for PROTEUS controller.
MMRD7 Series	PROTEUS Mini-Me universal remote ATG monitor - Color 7" graphic display with capacitive touch screen for audio/visual alarms and current inventory.
WRS-232	Wireless RS-232 link includes both tank gauge and remote transceivers and (2) RD-232C-75 cables
WRS-232XR	Long range wireless RS-232 link includes both tank gauge and remote transceivers (up to 1 mile)
RD-232C-75	75' RS-232 cable
C232-422-RD7CTS	RS-232-422 Booster Kit to increase distance of RS-232 output 3,000 feet (Includes 2 converters and 2 power transformers)