

UNIVERSAL INDOOR REMOTE DISPLAY & PRINT STATION MMRD7-P SERIES

PROTEUS Mini-Me is a color graphic display providing Automatic Tank Gauge (ATG) users the freedom to gain access to current tank gauging, leak detection and alarm status from ATG consoles.

Automatic Tank Gauges monitor storage vessels for level, temperature, volume and potential leaks. Typically, ATG's are located where audio visual alarms and level information are not conveniently accessible due to installation constraints.

These tank gauges are often difficult to use and understand. They are installed in locations that are out of the operator's normal work area therefore rendering potential alarms unnoticed.

PROTEUS Mini-Me allows the user to gain remote access easily and intuitively to these alarms and level information anywhere throughout a facility. It provides both wired and wireless access to industry standard ATG's providing easily accessible information where required.

The Mini-Me features standard RS-232, RS-485 and Ethernet communication. It also has optional wireless communication and external USB and 12V for printer functions.



GAIN ACCESS AND PRINT TANK STATUS ANYWHERE THROUGHOUT YOUR FACILITY

FEATURES

- Color 7-inch graphic display with capacitive touch screen
- TCP/IP | RS-485 | RS-232 communications standard
- Ability to view leak sensor alarms and tank inventory remotely
- Audible and visual alarms
- Wall mount
- Connects to any industry standard ATG
- Allows freedom to locate main ATG in a convenient/economical location
- Wireless option
- Wide viewing angle
- Easy to install
- Easy to use
- Remote software update capable
- Thermal Printer
 - Printable Reports:
 - Current Inventory
 - Current Alarms
 - Leak Sensor Status
 - Leak Detection Results (VLD)



PROTEUS[®] Mini-Me[™]

UNIVERSAL INDOOR REMOTE DISPLAY WITH PRINT STATION









SPECIFICATIONS

Input Power	100-240 VAC +/- 10% 50/60 Hz 25 watts
Display	Color 7-inch graphic display with capacitive touch screen
Audible alarm	85 dB piezoelectric horn
Printer	36-character thermal
System status	3 LED's (Power, Warning, Alarm)
Operating Temperature	20 to 140° F (-7° to 60° C)
Standard Communications	TCP/IP RS-485 RS-232
Models Available	MMRD7-P Indoor Mini-Me remote display hard wired with printer
Accessories	WRS-232 Wireless RS-232 link includes both tank gauge and remote transceivers and (2) RD-232C-75 cables WRS-232XR Long range wireless RS-232 link includes both tank gauge and remote transceivers (up to 1 mile) RD-232C-75 75' RS-232 cable C232-422-RD7CTS RS-232-422 Booster Kit to increase distance of RS-232 output 3,000 feet (Includes 2 converters and 2 power transformers)
Enclosure Type	UL Type 1
Weight	14 lbs. (6.35 kg)
Dimensions	(h) 10.0" (w) 15.2" (d) 5.1"

IMPORTANT: Specifications subject to change without notice, verify with manufacturer.

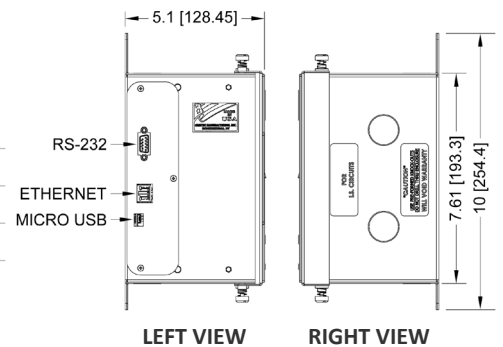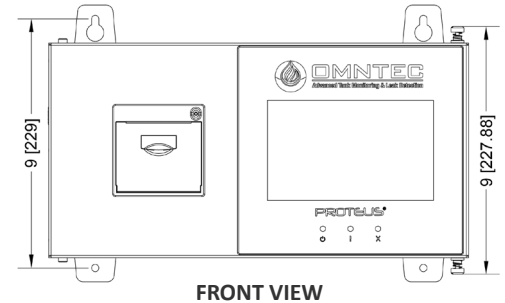

MINI-ME DISPLAY SCREENS

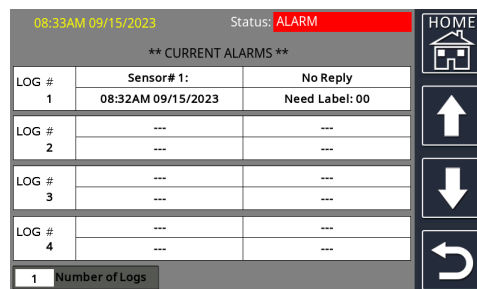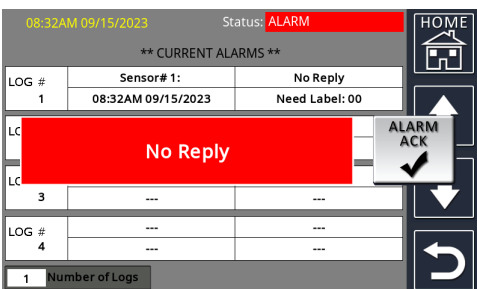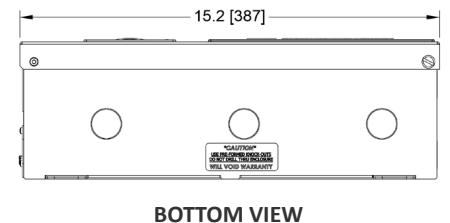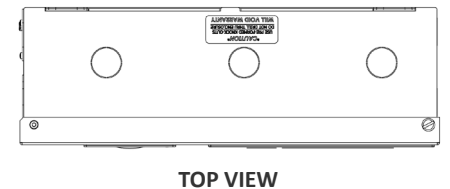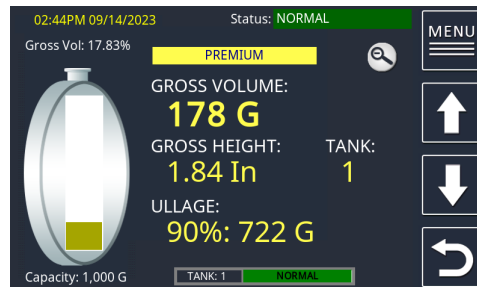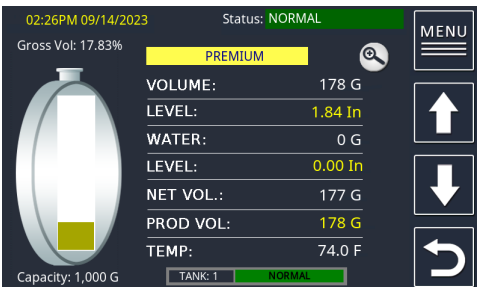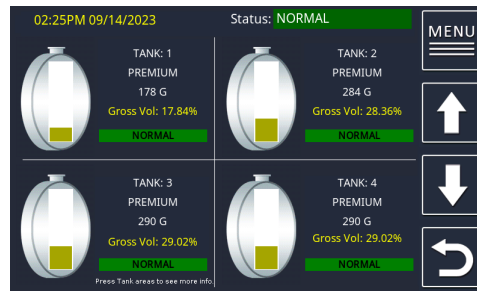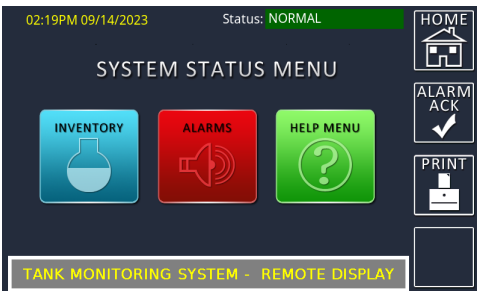

OMNTEC

OMNTEC Mfg., Inc.
2420 Pond Road,
Ronkonkoma, NY 11779
+1.631.981.2001
+1.631.981.2007
omntec@omntec.com
www.omntec.com

Document No. 900253 rev2628