


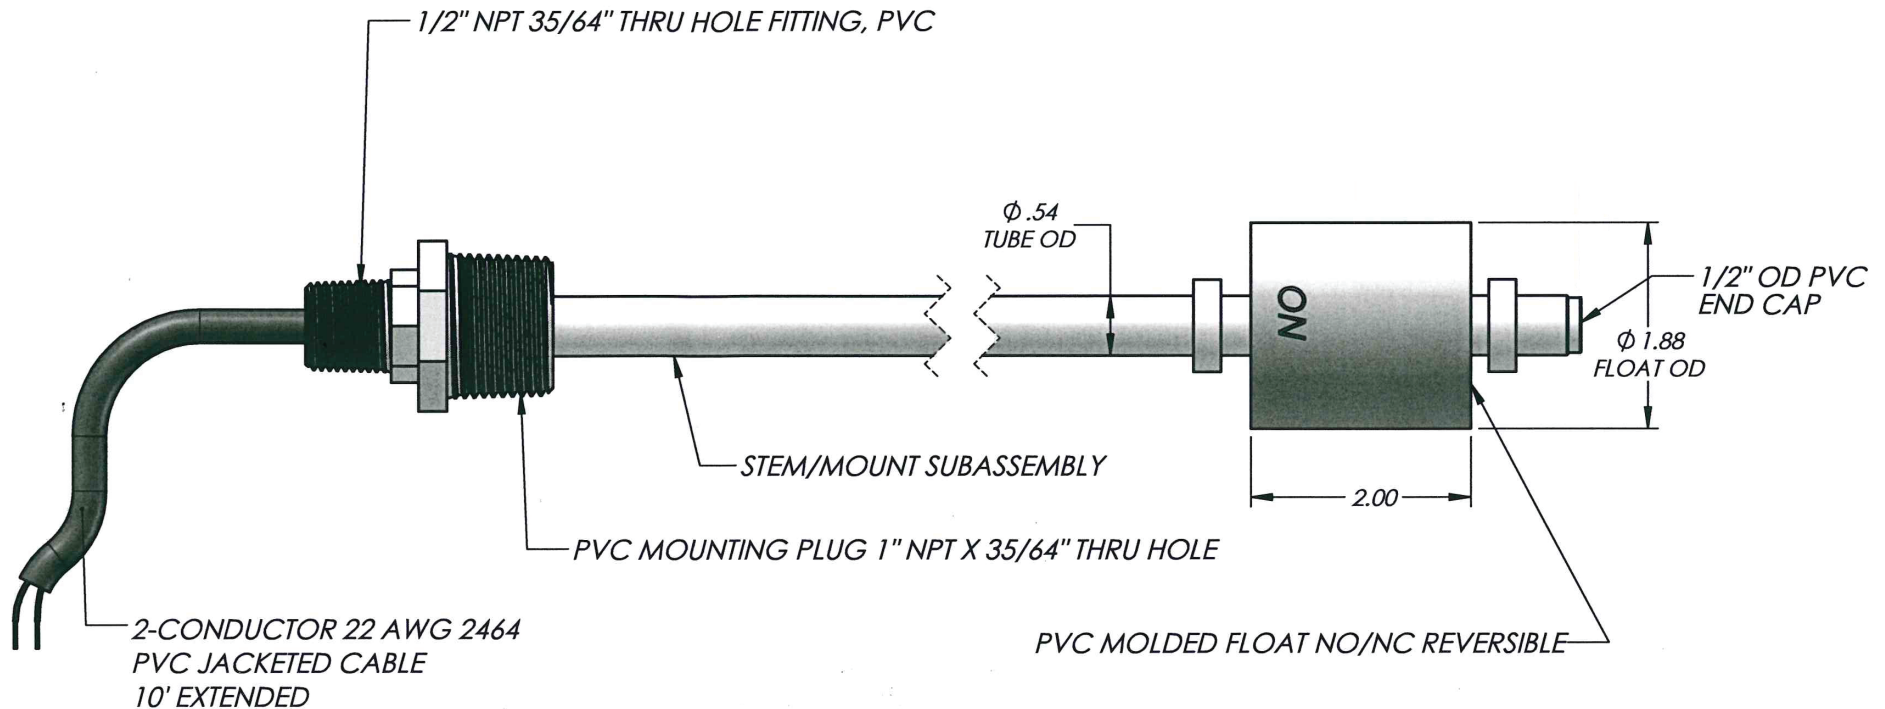

SPECIFICATIONS

1. Stem Weldment Materials:

Stem / Mounts: PVC Rigid

Collars: PVC Rigid

2. Electrical Specifications:

Switching Voltage: 300 VAC/VDC Max.

Switching Current: 0.5 AMP AC/0.7 AMP DC.

Contact Rating: 50 Watt.

Wiring Group: 2.

3. Float Specifications:

Float Material: PVC

Float S.G.: 0.7


Pressure Rating: 50 PSI Max.

Temperature Rating: 150 Degree F Max.


Minimum Media S.G.: 0.9

Float Overtravel: 1/8" to 5/32"

4. Can be made to any length up to 60 inches.

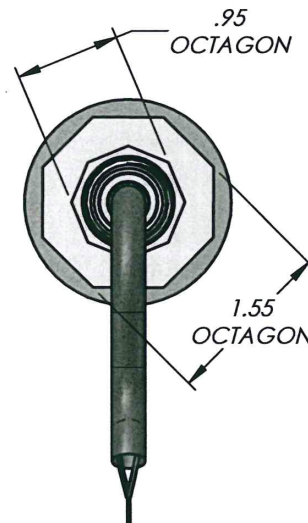

WIRING SCHEMATIC

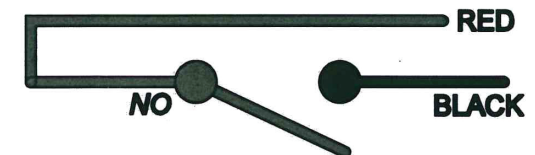

OMNTEC

1993 Pond Road, Ronkonkoma, NY 11779
Phone: (631) 981-2001 Fax: (631) 981-2007
www.omntec.com

Description: **LF-1-PVC** 1 Level Vertically Mounted Float Switch, PVC

Document Name/Number: **LF-1-PVC rev2001.ai**

Specifications subject to change without notice.