

# CANZAC® | GROUP

Improving the performance of concrete worldwide®




## GENERAL CONCRETE ACCESSORIES

### FOAM EXPANSION JOINT

WITH ADHESIVE BACKING

Closed cell industrial foam made from a blend of vinyl Nitrile & Neoprene with high-tack acrylic adhesive.

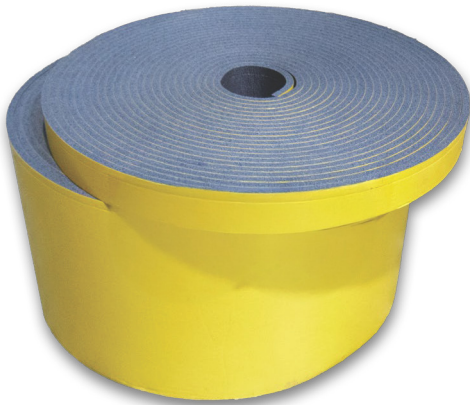

#### DETAILS

CODE	SIZE	UNIT
18 205	10x50mm	25m/coil
18 215	10x100mm	25m/coil
18 224	10x125mm	25m/coil
18 225	10x150mm	25m/coil
18 230	10x200mm	25m/coil
18 240	10x300mm	25m/coil
18 205.20	20x50mm	15m/coil
18 215.20	20x100mm	15m/coil
18 225.20	20x150mm	15m/coil
18 230.20	20x200mm	15m/coil
18 240.20	20x300mm	15m/coil

#### KEY FEATURES / BENEFITS

- Maintains a water tight seal at a minimum of 25% compression
- Good resistance to weathering, aging, fungi, most chemicals and ultra violet light
- Remains flexible at a wide range of operating temperatures
- Dimensionally stable. Will not ooze, run or drip
- Easily removable liner minimises stretching during installation
- Good temperature resistance
- Range of thicknesses available

#### APPLICATIONS

- In Slab
- Wrapping around penetrations to prevent cracking
  - Placing between existing structures and new slabs

#### APPLICATION GUIDE

Surfaces should be clean before applying. Avoid touching adhesive surface before application. Press firmly to ensure good adhesion.

# CANZAC® | GROUP

Improving the performance of concrete worldwide®



## GENERAL CONCRETE ACCESSORIES

### FOAM EXPANSION JOINT

WITH ADHESIVE BACKING

Closed cell industrial foam made from a blend of vinyl Nitrile & Neoprene with high-tack acrylic adhesive.

#### PHYSICAL PROPERTIES

	UNITS	VALUE
<b>DENSITY</b>	KG/M <sup>3</sup>	30
<b>TENSILE STRENGTH</b>	KPa	270
<b>ELONGATION</b>	%	125
<b>COMPRESSION HARDNESS</b>	KPa (25%)	30
<b>TEAR STRENGTH</b>	N / CM	16
<b>CHEMICAL RESISTANCE</b>	Acetone, Ethyl, Acetate, 30% H <sub>2</sub> SO <sub>4</sub>	0.1%
<b>ALL NO CHANGE AT STP</b>	Heptane, Toulene, CCl <sub>4</sub> 10% Liquid Ammonia 10% Nitric Acid	+7.5% +0.2% 0.1%
<b>WATER ABSORPTION</b>	gm/cc	0.002