



DRYING

FD-135 TP2 135LB CAPACITY ADVANCE DRYER



Fagor commercial dryers are perfect for laundromats, hotels, hospitals, nursing homes, and more.



TOUCH PLUS CONTROL

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.

CONNECTIVITY

- FagorKonnnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more

OUTSTANDING FEATURES

- Reversing drum action, standard
- Stainless steel drum, standard
- Frequency inverter, standard

EFFICIENCY

- Intelligent humidity control with temperature control at drum air inlet
- Optimized, mixed airflow
- Full thermal insulation of the cabinet and double door glass

VERSATILITY

- Make to order – customization
- Easily converts from OPL to COIN
- Wetcleaning configuration

ERGONOMICS

- Stainless steel mesh lint filter
- Large loading doors

MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models

MORE INFO


- Grey skin plate front and side panels, stainless look, standard
- Stainless steel drum, standard
- Soft touch hole design in dryer cylinder
- Anti-wrinkle at end of cycle
- ETL Approved

OPTIONS

- Integrated Fire Extinguishing System
- Dosing/spray system
- iDry - Intelligent humidity control with auto-dry capability (coin and OPL)
- Lint filter with various grids
- Stainless steel front panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model: protected board
- Coin/token kit

TECHNICAL DATA
ADVANCE DRYER | FD-135 TP2

FD-135 TP2		
DRUM		
Load capacity	lbs	135
Drum diameter	in	48.23
Drum depth	in	40.16
Drum volume	cu. ft.	42.37
Door opening diameter	in	31.57
Height from floor to bottom of door	in	50.20
Drum motor power	hp	1.41
GAS POWER		
Installed heating power gas	Btu/h	307,093
Evaporation capacity	Gal/h	19.0
Gas inlet	in	3/4"
VENTILATION		
Normal air flow	cfm	1,765
Vent size	in	12"
Fan motor power	hp	1.41
CONNECTIONS		
Voltage 208-240/60/3~ +G	FLA/A	12.1/25
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	in	50.00 / 52
Net depth / Gross depth	in	53.78 / 57
Net height / Gross height	in	93.70 / 87
Net weight / Gross weight	lbs	1,166 / 1,268

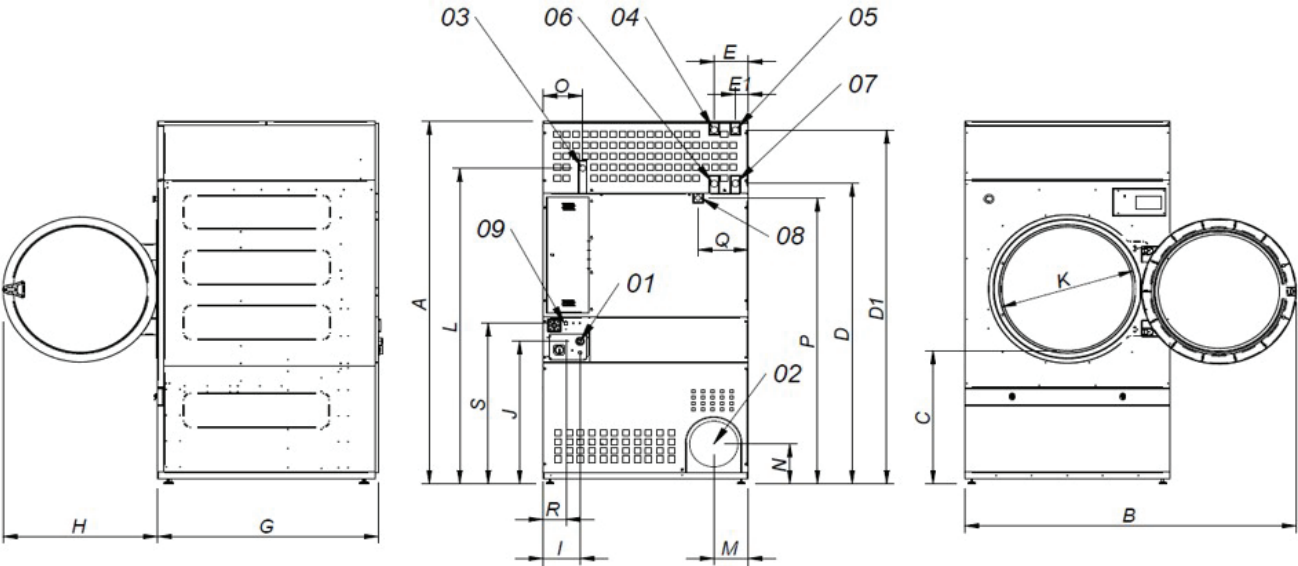

- 01. Power supply
- 02. Fumes output Ø200
- 03. Gas inlet 1/2"
- 04. Steam inlet 3/4"
- 05. Condensate outlet 3/4"
- 06. Sprinkler valve 3/4"
- 07. Ethernet connection

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
in	93.70	80.51	34.41	77.99	90.98	8.31	3.15	50.00	53.78	37.64	9.76	36.81	31.57	82.20	8.43	9.45	9.61	72.48	12.13	6.30	41.46