

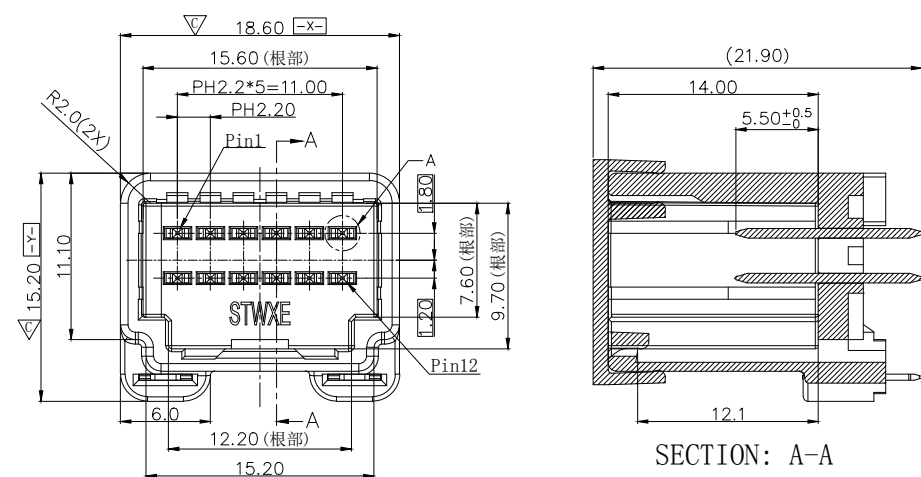


REV.	ECN Number	Description	Drawn
		RELEASE	2016.08.17



SECTION: A-A

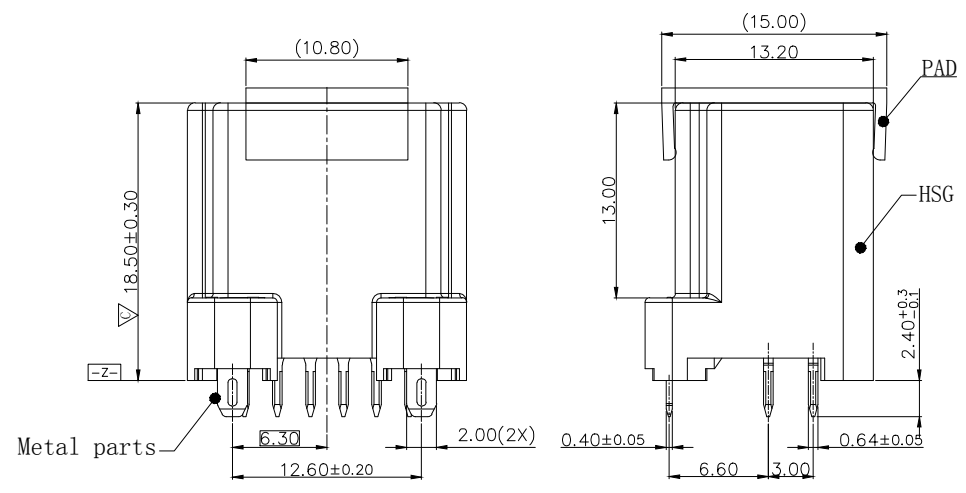

DETAIL A
SCALE 10: 1

- NOTES:
1. HOUSING MATERIAL:HIGH TEMPERATURE PLASTICS, UL94V-0.
 2. CONTACT MATERIAL:COPPER ALLOY.
 3. OPERATING TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
 4. STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
 5. SOLDER STENCIL RECOMMENDING A METAL MORE THAN 0.12~0.15mm THICK.
 6. Harmful Material Should Comply With The"RoHS"Standard.
 7. "▽"SIZE FOR CPK;
 8. PRODUCT NUMBER MATRIX:

APC6-12XX-X-0


Number of Contacts

Contact Plating:

Definition	Code
◎Tin plated	A

NULL:Low temperature thermoplastic
F:High temperature thermoplastic
H:Halogen free

T:Tray
K:REEL



TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE 2:1		ORIGINAL DRAWN: Xie Yong	DATE 2016. 08. 17	DGW. NO. 600-0000-0169	TITLE PH2. 2-12PIN DIP CONNECTOR CUSTOMER DRAWING	REV. 1
				UNIT mm		CHECK: Yanghong	DATE 2016. 08. 18			PARTS NO. (INTENDED USE) APC6-12XX-X-0
X. X	±0. 30	X. °	±3°	SIZE A4		APPROVE: Ady zhou	DATE 2016. 08. 19			
X. XX	±0. 20	X. X°	±2°							
X. XXX		X. XX°	±1°							

REV.	ECN Number	Description	Drawn
		RELEASE	2016.08.17

RECOMMENDED PCB LAYOUT (TOP SURFACE)
TOLERANCE ± 0.05

RECOMMENDED PCB LAYOUT (BOTTOM SURFACE)
TOLERANCE ± 0.05


PAD AREA

STEEL MESH(TOP SURFACE) T=0.12mm

STEEL MESH(BOTTOM SURFACE) T=0.12mm


BSTEEL MESH HOLE

TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE 2:1		ORIGINAL DRAWN:	DATE	DGW. NO.	TITLE	REV.
X. X	± 0.30	X. °	$\pm 3^\circ$	UNIT mm		Xie Yong	2016.08.17	600-0000-0169	PH2.2-12PIN DIP CONNECTOR CUSTOMER DRAWING	1
X. XX	± 0.20	X. X°	$\pm 2^\circ$	SIZE A4		Yanghong	2016.08.18			SHEET
X. XXX		X. XX°	$\pm 1^\circ$			Ady zhou	2016.08.19	PARTS NO. (INTENDED USE) APC6-12XX-X-0		2/4

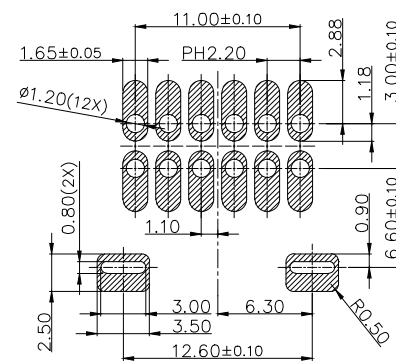


RECOMMENDED PCB LAYOUT (BOTTOM SURFACE)

TOLERANCE ± 0.05

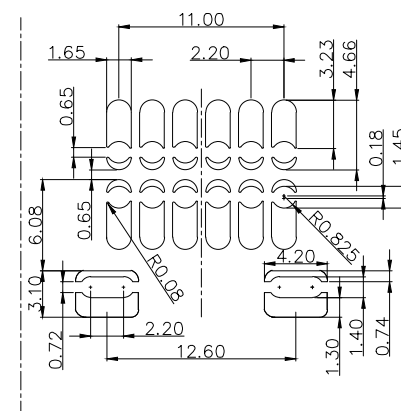

STEEL MESH (BOTTOM SURFACE) T=0.12mm

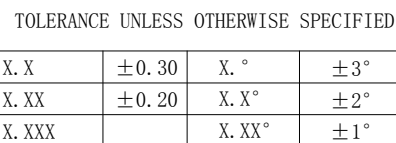



SIZE	A4
------	----

APPROVE:	Ady zhou
----------	----------

7	DGW. NO. 600-0000-0169
8	PARTS NO. (INTENDED USE)
9	APC6-12XX-X-0

TITLE
PH2. 2-12PIN DIP CONNECTOR CUSTOMER DRAWING

REV.	1
SHEET	2/4

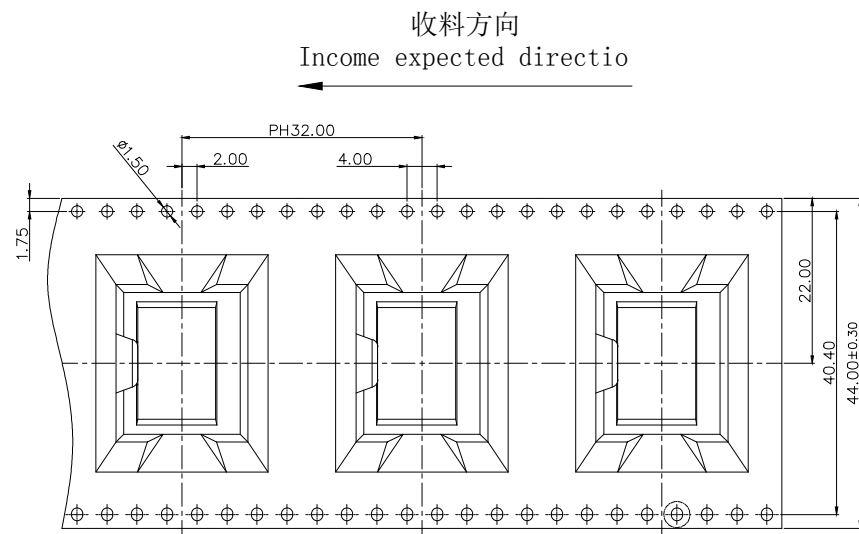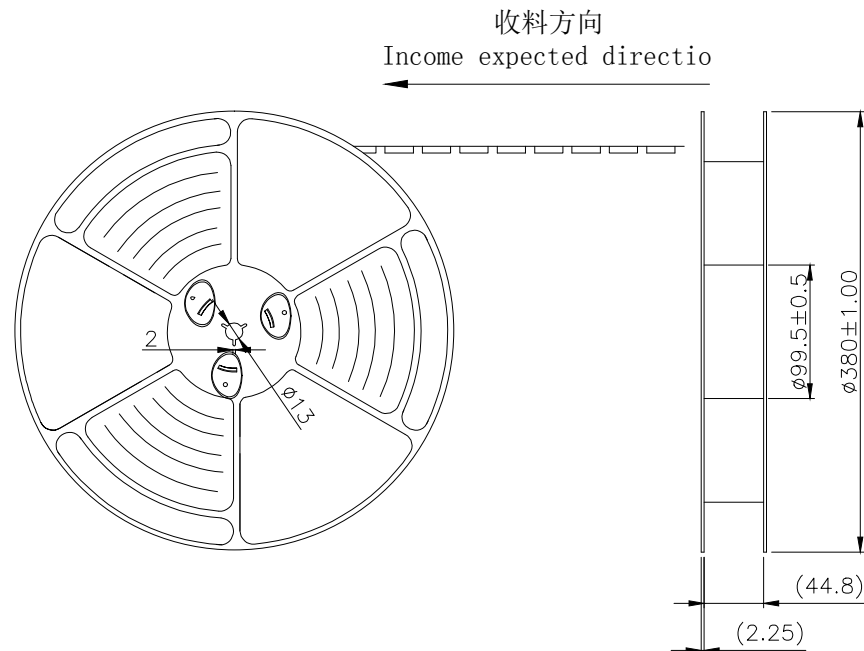


NOTES

1. 每卷包装数量及每箱装箱数量如下表格.
Packing q'ty of each reel & carton as below table shown.

2. 带子引导长度.
Lead tape length.


收料方向
Income expected direction

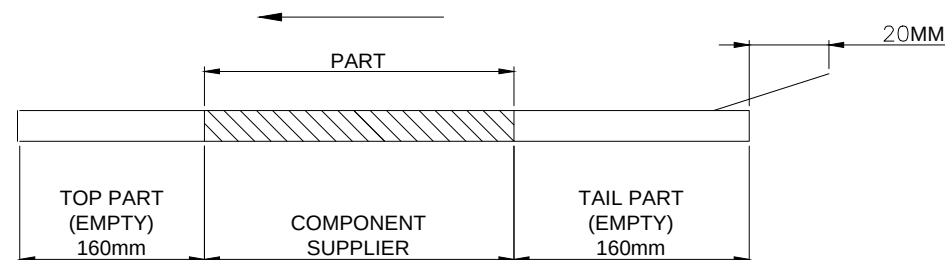

3. 上带剥拉力为: 0.1~1.3N(10.2gf~130gf)
Peeling off force of top tape:0.1~1.3N(10.2gf~130gf)

出货运输过程中一定注意:
This requirement should be applied at shipment:

卷带在运输过程中不能散开
Peeling off should not be allowed during transportation.

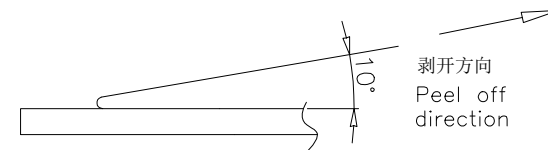

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. X	±0.30	X. °	±3°
X. XX	±0.20	X. X°	±2°
X. XXX		X. XX°	±1°

SCALE 2:1

UNIT mm

SIZE A4



ORIGINAL DRAWN: Xie Yong

CHECK: Yanghong

APPROVE: Ady zhou

DATE 2016.08.17

DATE 2016.08.18

DATE 2016.08.18

DGW. NO.

600-0000-0169

PARTS NO. (INTENDED USE)

APC6-12XX-X-0

TITLE


PH2. 2-12PIN DIP CONNECTOR
CUSTOMER DRAWING

REV.


1

SHEET

3/4

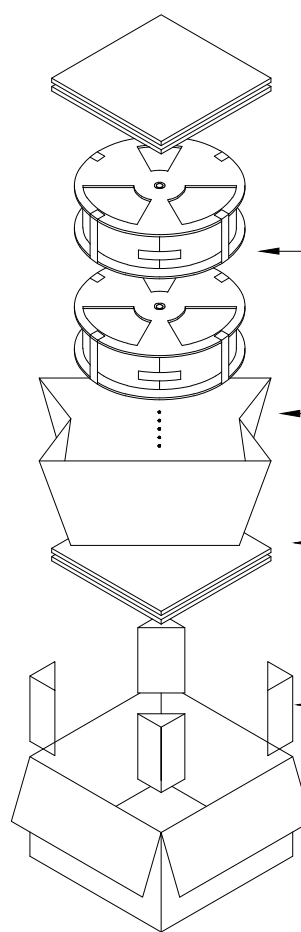

标签黏贴处 (朝卷装包材的小定位孔一侧)

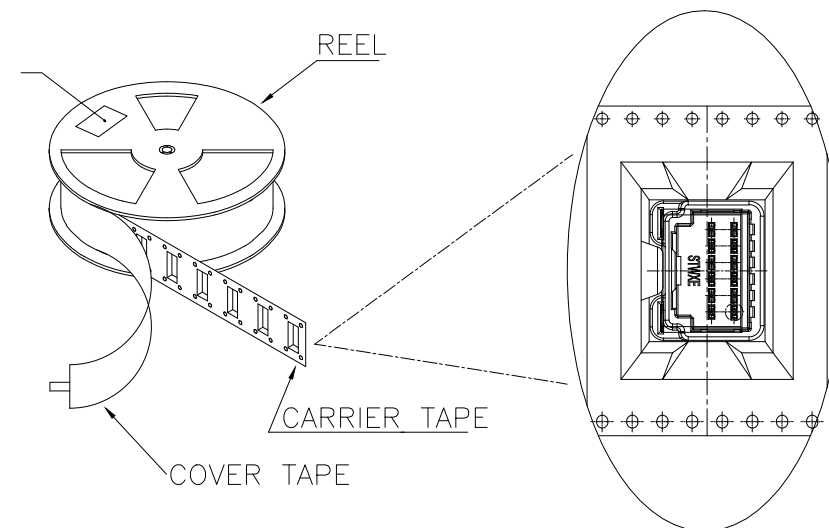

NOTE:

1. 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
2. 以上胶带覆盖下包装带经包装机包装。
Use cover tape to cover and seal up.
3. 每个纸箱放2个珍珠棉
Every carton use 2pcs EPE.
4. 将装满产品的卷盘放入纸箱并以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

产品料号 (PRODUCT No.)	包装数量 (PACKING CAPACITY)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
APC6-12AK-F-0	100	4	400

	TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE 2:1		ORIGINAL DRAWN: Xie Yong		DATE 2016. 08. 17		DGW. NO. 600-0000-0169		TITLE PH2. 2-12PIN DIP CONNECTOR CUSTOMER DRAWING		REV. 1	
	X. X	±0. 30	X. °	±3°	UNIT mm		CHECK: Yanghong		DATE 2016. 08. 18						SHEET	
	X. XX	±0. 20	X. X°	±2°	SIZE A4 		APPROVE: Adv zhou		DATE 2016. 08. 19		PARTS NO. (INTENDED USE) APC6-12XX-X-0		4/4			
	X. XXX		X. XX°	±1°												