



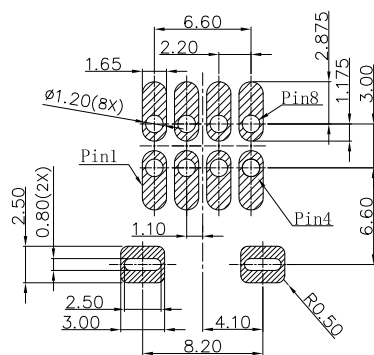


RECOMMENDED PCB LAYOUT (TOP SIDE)
TOLERANCE ± 0.05

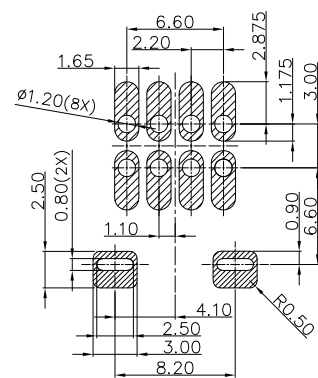


RECOMMENDED PCB LAYOUT (BOTTOM SIDE)
TOLERANCE ± 0.05

 PAD AREA



STEEL MESH(TOP SIDE) T=0.12mm

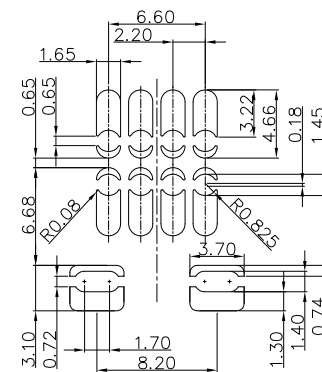

STEEL MESH(BOTTOM SIDE) T=0.12mm

 BSTEEL MESH HOLE



TOLERANCE UNLESS OTHERWISE SPECIFIED

X. X	± 0.30	X. °	$\pm 3^\circ$
X. XX	± 0.20	X. X °	$\pm 2^\circ$
X. XXX		X. XX °	$\pm 1^\circ$

SCALE 2:1

UNIT mm

SIZE A4



ORIGINAL DRAWN:

ZW

DATE

2017. 02. 06

CHECK:

Yanghong

DATE

2017. 02. 06

APPROVE:

Ady zhou

DATE

2017. 02. 06

DWG. NO.

600-0000-XXXX

PARTS NO. (INTENDED USE)

APC6-08XX-X-0

TITLE


PH2. 2-8PIN DIP CONNECTOR
CUSTOMER DRAWING

REV.

1

SHEET

2/4

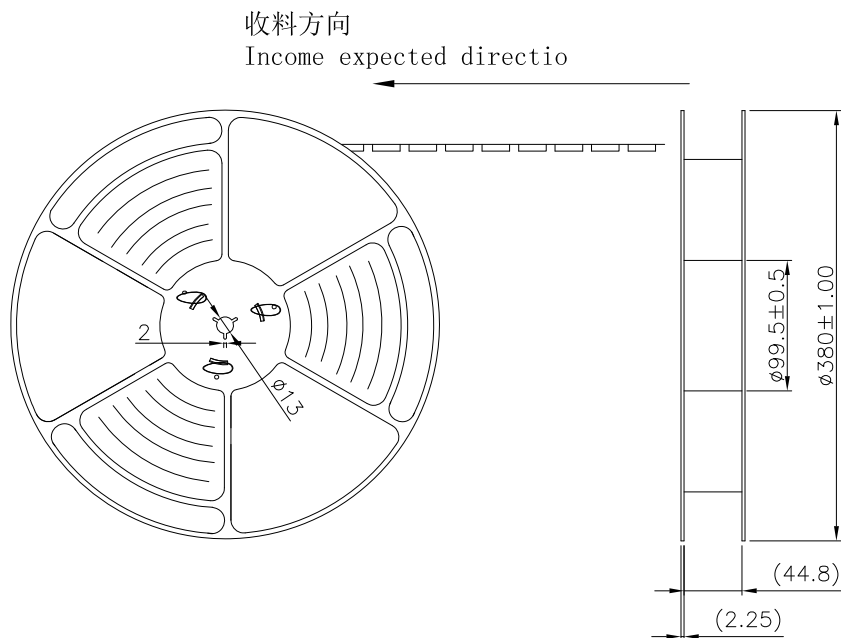


NOTES

1. 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.

2. 带子引导长度。
Lead tape length.


收料方向
Income expected direction

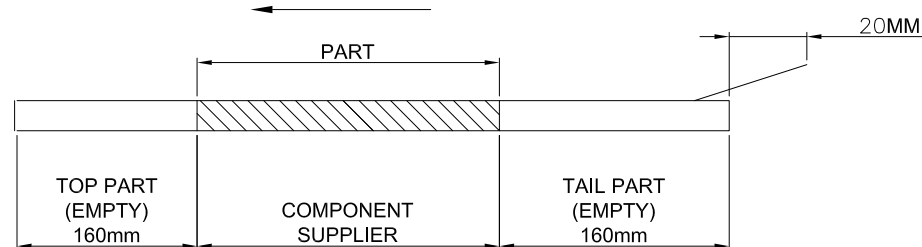


3. 上带剥拉力为: 0.1~1.3N(10.2gf~130gf)
Peeling off force of top tape:0.1~1.3N(10.2gf~130gf)

出货运输过程中一定注意:
This requirement should be applied at shipment:

卷带在运输过程中不能散开
Peeling off should not be allowed during transportation.

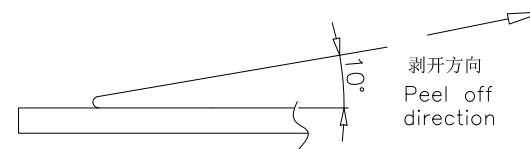

收料方向
Income expected direction

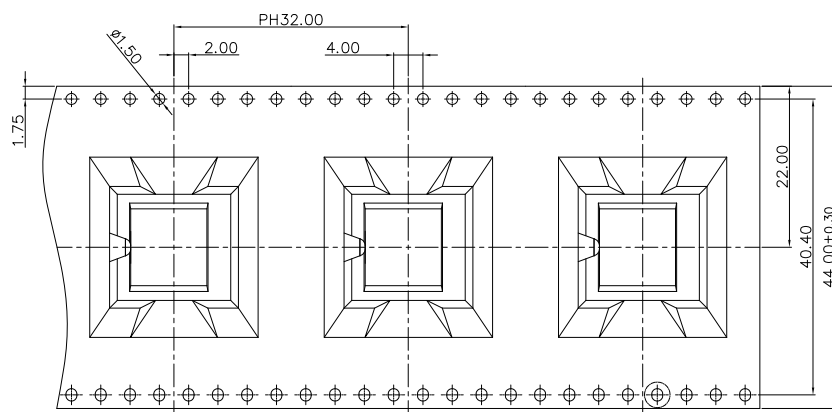

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. X	± 0.30	X. °	± 3°
X. XX	± 0.20	X. X°	± 2°
X. XXX		X. XX°	± 1°

SCALE 2:1

UNIT mm

SIZE A4



ORIGINAL DRAWN:
ZW

CHECK:
Yanghong

APPROVE:
Ady zhou

DATE
2017. 02. 06

DATE
2017. 02. 06

DATE
2017. 02. 06

DWG. NO.
600-0000-XXXX


PARTS NO. (INTENDED USE)

APC6-08XX-X-0


TITLE
PH2. 2-8PIN DIP CONNECTOR
CUSTOMER DRAWING

REV.
1

SHEET
3/4

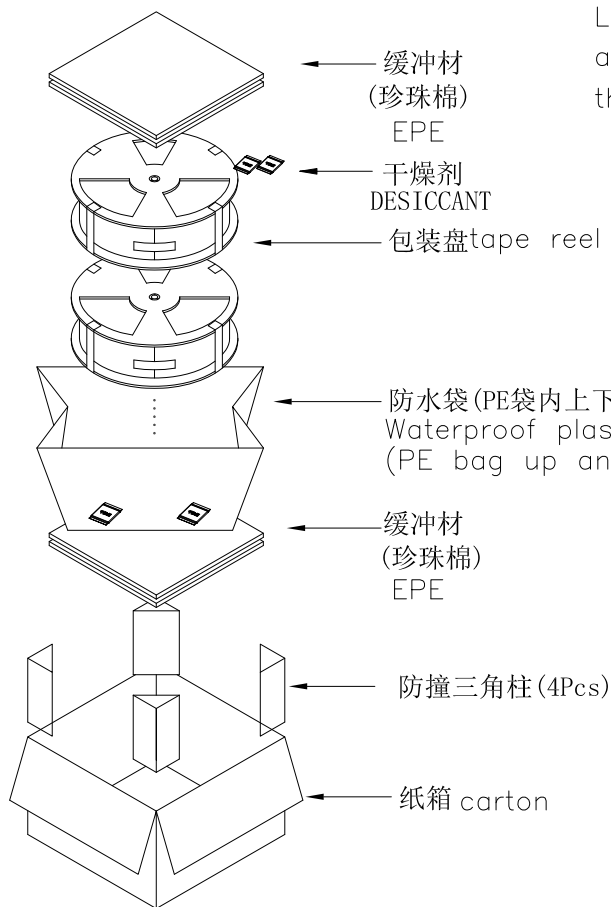

标签黏贴处 (朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side).

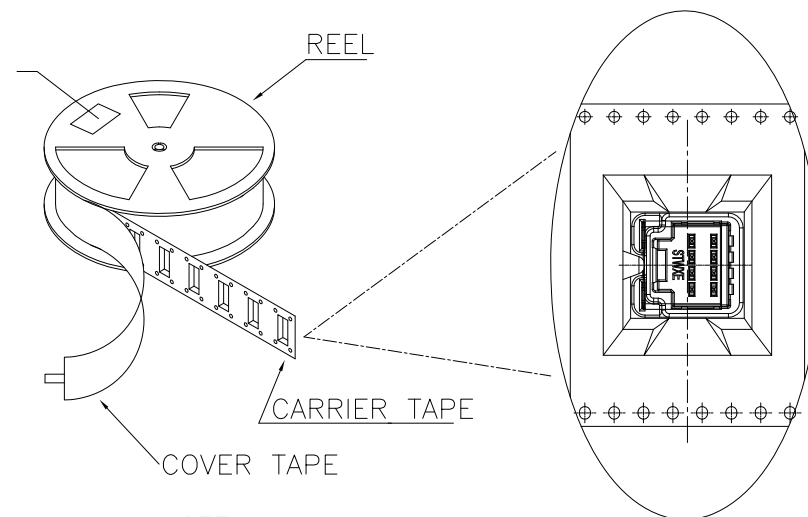

NOTE:

- 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
- 以上胶带覆盖下包装带经包装机包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱并以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

产品料号 (PRODUCT No.)	包装数量 (PACKING CAPACITY)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
APC6-08AK-F-0	100	4	400

DWG. NO. 600-0000-XXXX	PARTS NO. (INTENDED USE) APC6-08XX-X-0	TITLE PH2. 2-8PIN DIP CONNECTOR CUSTOMER DRAWING	REV. 1
			SHEET 4/4

INNOCOSO

TOLERANCE UNLESS OTHERWISE SPECIFIED			
X. X	±0.30	X. °	±3°
X. XX	±0.20	X. X°	±2°
X. XXX		X. XX°	±1°

SCALE 2:1	UNIT mm	SIZE A4	
ORIGINAL DRAWN: ZW			
CHECK: Yanghong			

DATE 2017.02.06	APPROVE: Ady zhou	DATE 2017.02.06
DATE 2017.02.06		
DATE 2017.02.06		

DWG. NO. 600-0000-XXXX	PARTS NO. (INTENDED USE) APC6-08XX-X-0
DATE 2017.02.06	
DATE 2017.02.06	