
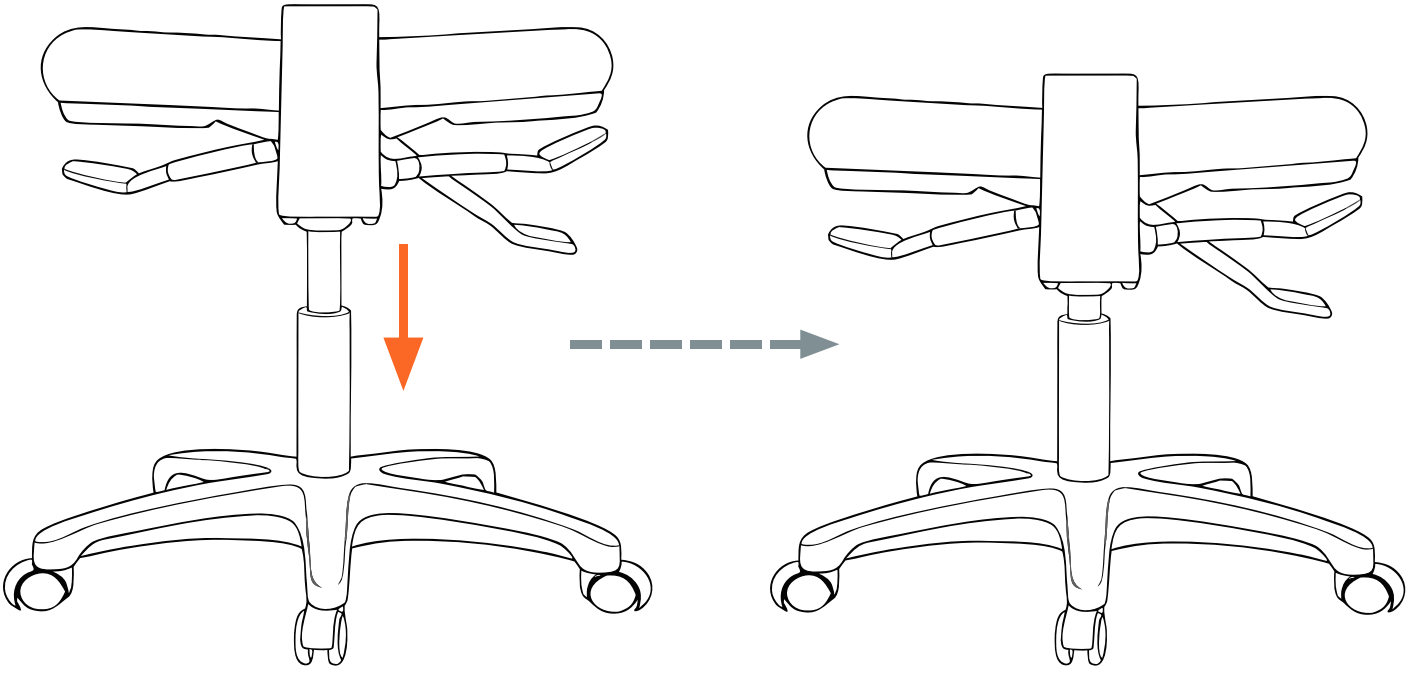
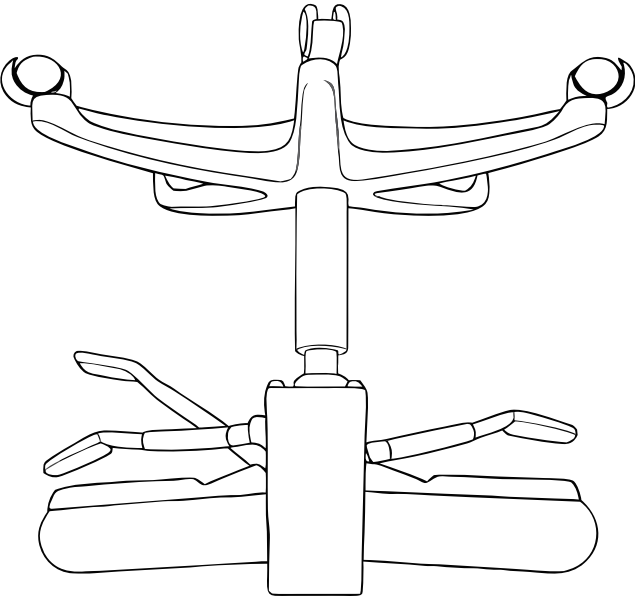
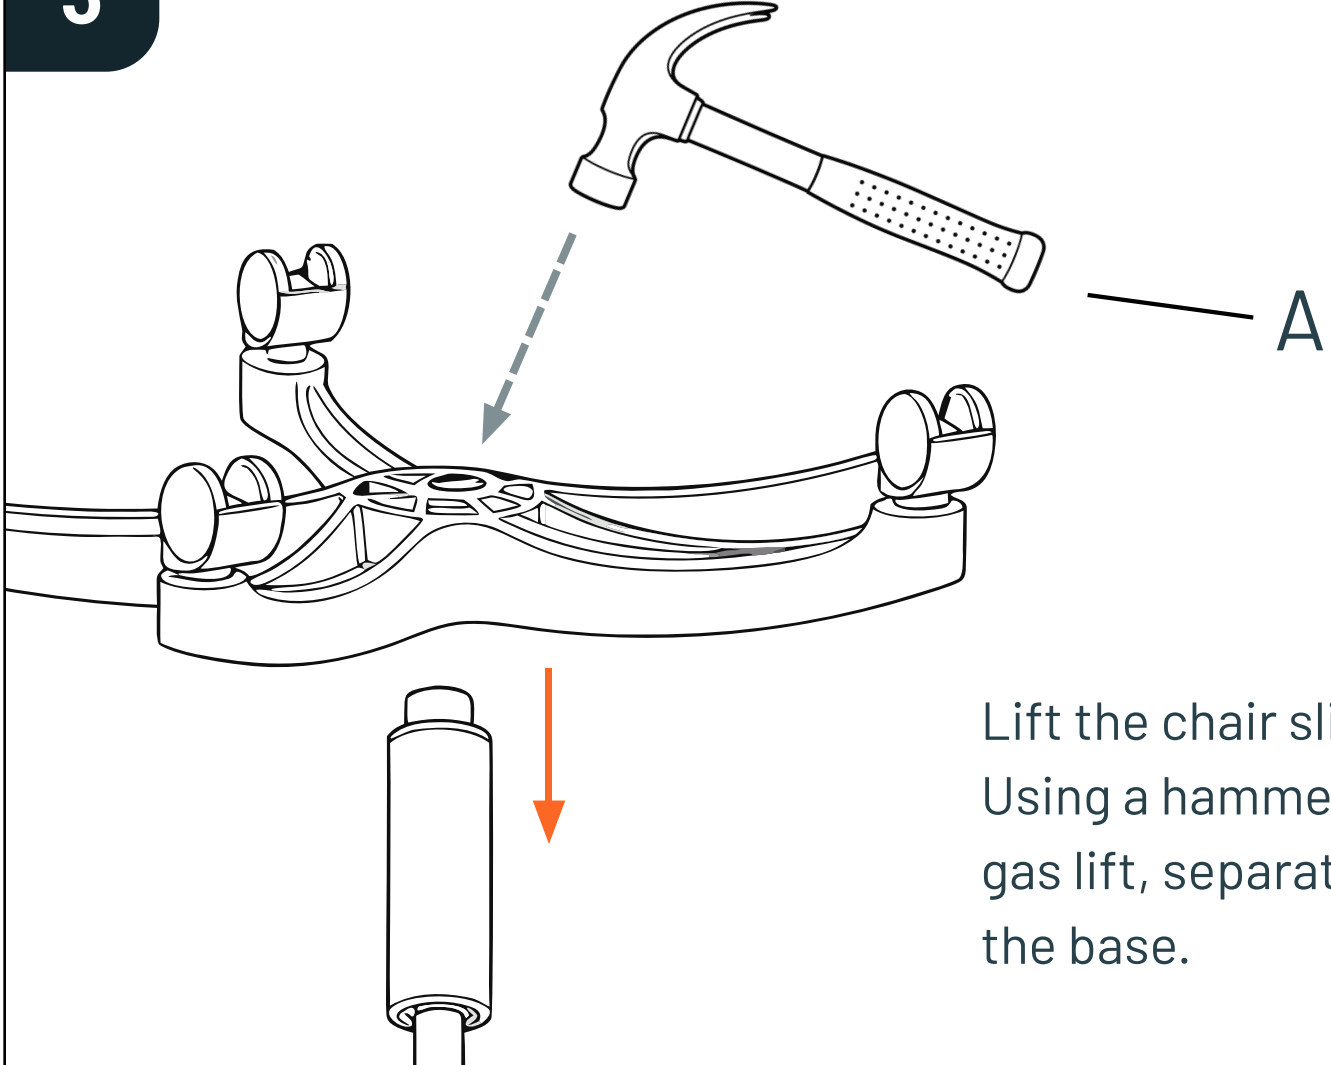
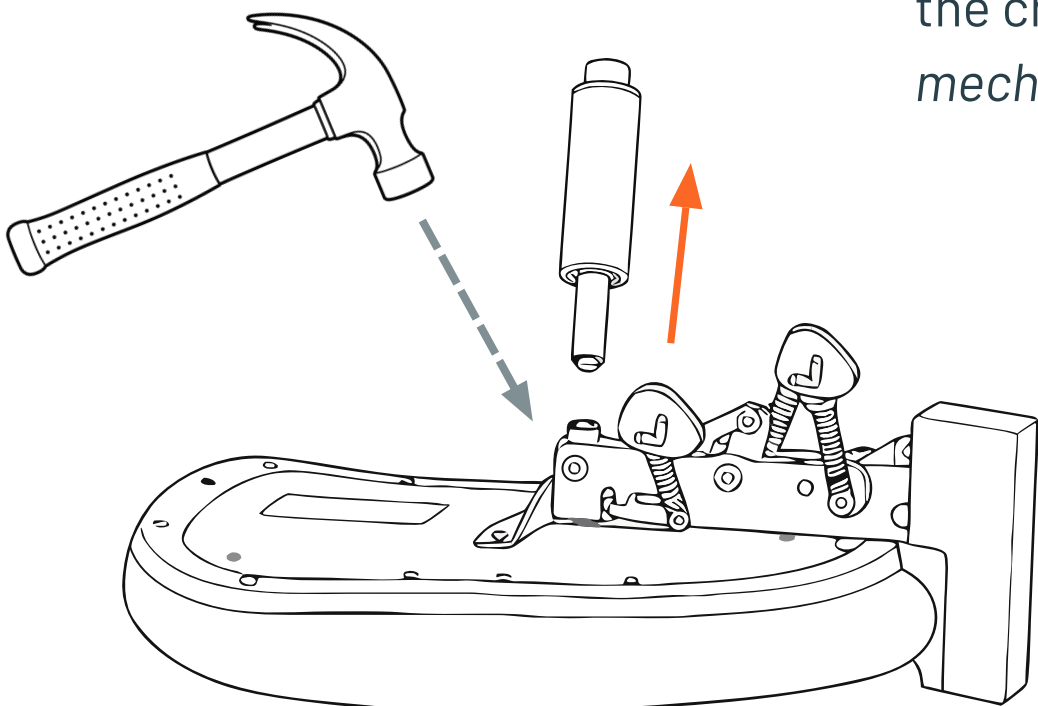
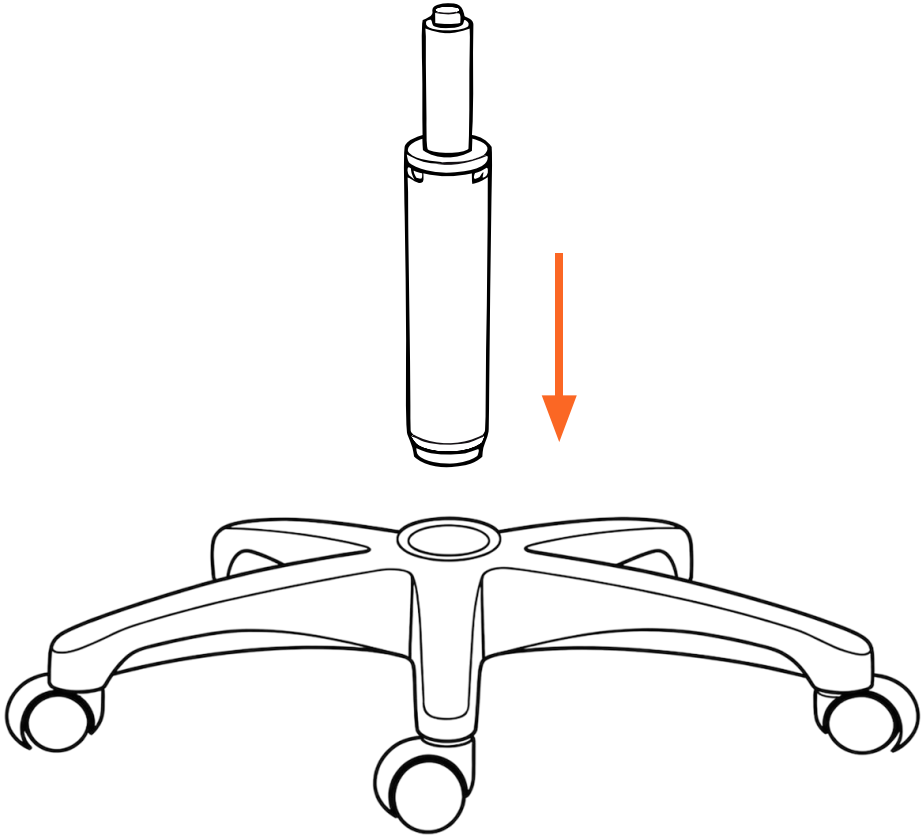
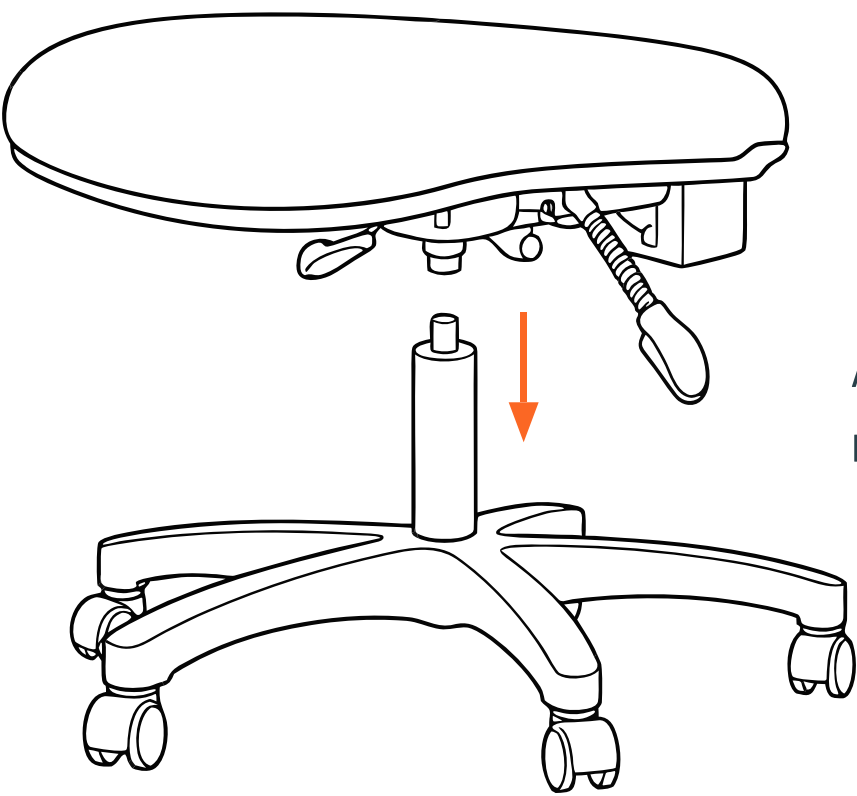


How to Replace the Gas Lift

Assembly instructions

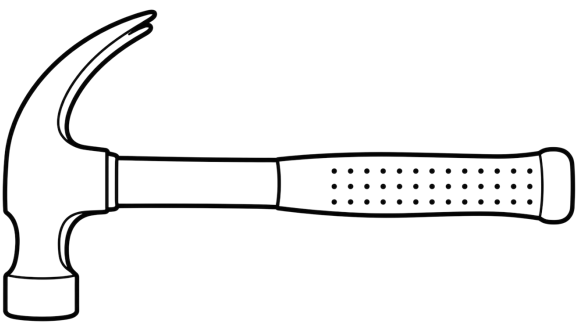

Learn more in our
Assembly Library.

1  Sit on the chair and lower it to the lowest position.	2  Turn the chair upside down and place on a raised surface.
3  Lift the chair slightly. Using a hammer, strike the gas lift, separating it from the base.	4  Holding the gas lift, lift the chair slightly. While holding the chair, firmly strike the mechanism. Applying a thin coat of WD40 can ease this process.  B
5  Flip the base and insert the gas lift.	6  Align the assembled seat mechanism with the gas lift
A  1 PC	B  (Optional - 1 PC)