

ACE Supreme™

ACE Supreme is an ELES GO surface solution from Germany made using electron-beam nanotechnology. We introduce electron-beam technology for simple reasons: to improve our end-users' quality of life by reducing life's trivial strains and to help protect our environment by being free of solvents and formaldehyde.

ACE Supreme captivates with bold designs and a feel that's smooth to the touch.

ACE Supreme appeals to the senses, and its traceless qualities enhance its usability. In addition to fingerprint and scratch resistant, it can also thermally heal micro-scratches.

艾斯至尊是使用了来自德国的激光电子束技术。ELES GO产品为高压层积板的表面提供解决更好的方案。我们引入激光电子束技术的目的是减少生活中的琐事,改善人们的生活质量,同时我们的产品不含任何有害的溶剂和甲醛成分以此来保护我们的环境。

艾斯至尊以醒目的设计和柔软的手感吸引着我们。
艾斯至尊柔软的质感刺激着我们的感官,而其无尽的品质令人着迷。



M0003 Slate Ace AS

Polilam

Tianning Times Square
No.19, Zhulin West Road
Building A, Office #2301
Changzhou, China

江苏省常州市天宁区竹林西路19号
天宁时代广场 A座 2301

E sales@polilam.com
T +86 0519 89892128
F +86 0519 89892128

Polilam

PO Box 1210
Port Isabel, Texas 78578
United States of America

E sales@polilam.com
T +1 956 832 4798




ACE Surfaces™

Polilam

ACE Supreme™

Features:


- Low Light Reflectivity
光反射率低
- Extremely Matt
哑光表面
- Anti-Fingerprint
耐指纹
- Soft Touch
肌肤触感
- Resistant to Scratches and Abrasions
耐刮伤 耐磨损
- Resistant to Dry-Heat
耐干热
- Resistant to Household Regents and Acid-Based Solvents
耐酸腐蚀和家用化学试剂
- Easy Clean
易清洁
- Hydro-Repellent
防潮湿
- Excellent Intensity and Color Depth
色牢度强
- Enhanced Anti-Bacterial Properties
抗菌性强
- Thermal Healing of Superficial Micro Scratches
轻微刮伤可热修复
- Enviromental Friendly
健康环保
- Free from Solvents and Formaldehyde
低甲醛释放量




M0005 Jinx Ace AS



M0006 Raven Ace AS



M0002 Snow Ace AS



M0001 Ivory Ace AS



M0003 Slate Ace AS



M0004 Sepia Ace AS

ACE Premium™

ACE Premium is a military grade surface solution technology, brought to you from Dr. Han’s Laboratory in Portland, Oregon, to revolutionize the decorative industry.

ACE Premium is the surface of the age. Its surface formaldehyde and solvent free, made from acrylic resin, coating the surfaces of our laminates, and minimalizing the impact on our environment.

Available in a vast range of designs, ACE Premium finishes enhance the design of decorative paper in a way that a traditional press plates cannot.

ACE Premium properties adapt to everyday touch, use, and wear, without the worry of handprint or residue. These surfaces adapt and conform to suit your living style. They require little maintenance, and have extremely durable properties.

艾斯优选是一项典型的军工类技术民用化的产品代表。它是由俄勒冈州波特兰市的汉斯博士实验室推出, 意义在于振兴装饰行业。

艾斯优选是我们这个时代的表面。由丙烯酸树脂制成的无甲醛涂料, 不含溶剂, 可在我们的层压板表面进行涂饰。

艾斯优选饰面有多种设计可供选择, 以传统压板无法提供的技术, 增强了装饰纸的设计。

艾斯优选的属性可适应日常触摸, 使用和磨损, 不用担心留有手印或任何残留物。这些表面更加适应当代人生活方式。因为他们几乎不需要维护, 使清洁变得轻而易举。



ACE Premium™





Features:

- **Low Light Reflectivity**
光反射率低
- **Extremely Matt**
哑光表面
- **Anti-Fingerprint**
耐指纹
- **Soft Touch**
肌肤触感
- **Resistant to Abrasions**
耐磨损
- **Resistant to Dry-Heat**
耐干热
- **Resistant to Household Regents and Acid-Based Solvents**
耐酸腐蚀和家用化学试剂
- **Easy Clean**
易清洁
- **Hydro-Repellent**
防潮湿
- **Excellent Intensity and Color Depth**
色牢度强
- **Enhanced Anti-Bacterial Properties**
抗菌性强
- **Applicable to Multiple Designs**
多样性花色选择
- **Enviromental Friendly**
健康环保
- **Free from Solvents and Formaldehyde**
低甲醛释放量



ACE Premium™

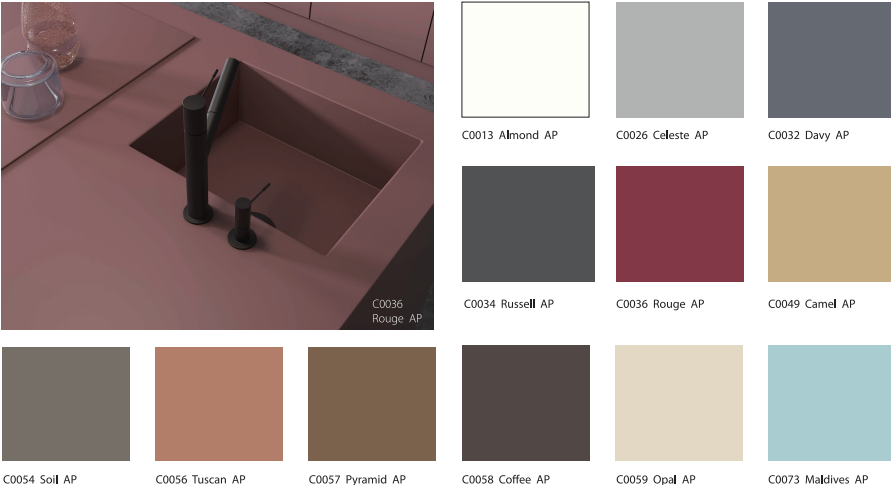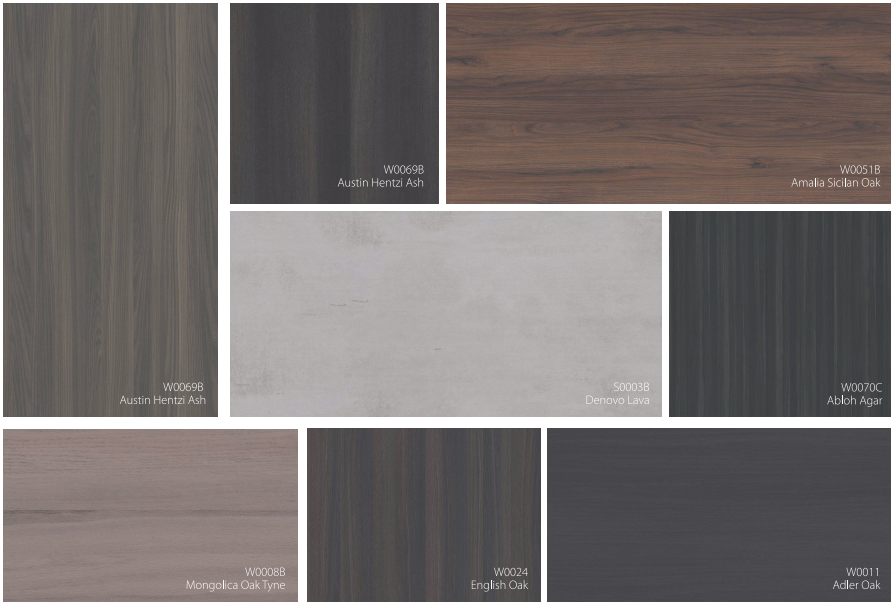

ACE Surfaces™

性能项目 Properties	指标范围 Standard Range		艾斯至尊 ACE Supreme™		艾斯优选 ACE Premium™	
	耐污染 Resistant to Staining	干燥器法: ≤1.5 Drying Method ≤ 1.5	5	5	5	5
甲醛释放量 Formaldehyde Emission	≥ 表面无大于90%的连续划痕 ≥ Surface without more than 90% Continuous Scratches	干燥器法: ≤1.5 Drying Method ≤ 1.5	8N	0.1	3N	0.1
表面耐划痕 Scratch Resistant	≥ 表面无大于90%的连续划痕 ≥ Surface without more than 90% Continuous Scratches	干燥器法: ≤1.5 Drying Method ≤ 1.5	5	5	5	5
耐干热 Resistance to Dry Heat	≥ 表面无大于90%的连续划痕 ≥ Surface without more than 90% Continuous Scratches	干燥器法: ≤1.5 Drying Method ≤ 1.5	5	5	5	5
耐香烟灼烧 Resistance to Cigarette Burns	≥ 表面无大于90%的连续划痕 ≥ Surface without more than 90% Continuous Scratches	干燥器法: ≤1.5 Drying Method ≤ 1.5	5	5	5	5
表面耐磨 Surface Wear Resistance	磨损值 Wear Value	≤0.15	600 Rounds	600 Rounds	450 Rounds	450 Rounds
耐腐蚀 Adhesion	表面情况 Surface Condition	表面留有花纹 Surface is left with a mark	Passed	Passed	Passed	Passed