




# Shift In G2 Downlight, Textured White/Black, 3000K

SHFI0091.WB30.M.01-FP035001

Availability: **Standard** (This item is generally stocked, please check with your Unios distributor)

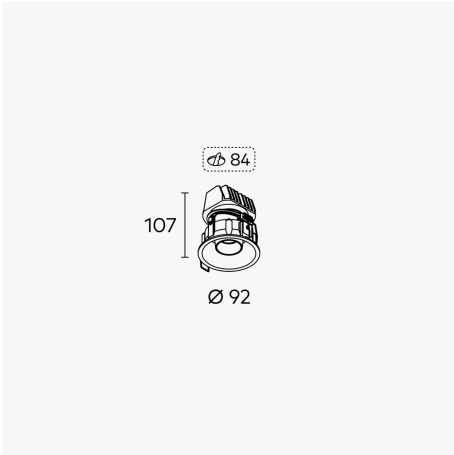

### Downloads

- [BIM Object - Sketchup](#)
- [BIM Object - Revit](#)
- [IES File](#)
- [Installation Instructions](#)

### Key Product Info

- 13W (350mA)
- 3000K (928lm)
- Textured White/Black
- 30°

### Driver

|                        |  |
|------------------------|--|
| Name                   | Unios G2 350mA Flicker-Free Phase-Cut Driver |
| Product Code           | FP035001                                     |
| Driver Location        | Remote                                       |
| Control Type           | Phase-cut dimmable                           |
| Measurements (LxWxH)   | 101x51x24mm                                  |
| Current output maximum | 350mA  |

### Design Specifications

|             |                         |
|-------------|-------------------------|
| Material    | Powder Coated Aluminium |
| Height      | 107mm                   |
| Diameter    | Ø92mm                   |
| Tilt        | 30°                     |
| Weight      | 570g                    |
| Family Name | Shift In G2 Downlight   |




### Performance Specifications

|                |                 |
|----------------|-----------------|
| Lumens         | 928lm           |
| IP Rating      | IP20            |
| CRI            | 92+ (R9: >50)   |
| Efficacy       | Up to 71.38lm/W |
| UGR            | <13             |
| Lifetime       | >55,000h L90B10 |
| LED Type       | COB             |
| SDCM           | ≤2              |
| COI Compliance | N/A             |
| Warranty       | 5 Years         |

### Installation Specifications

|                   |          |
|-------------------|----------|
| Remote Mount      | Yes      |
| Insulation Rating | CA90     |
| Cutout Size       | 84mm     |
| Class Rating      | Class II |

### Photometrics



### Cone Diagram

