



Luminaire

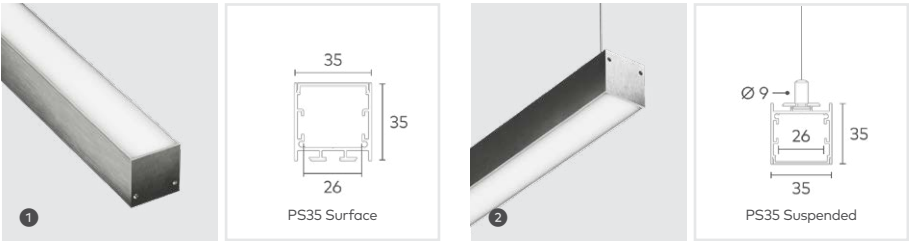

Accessories

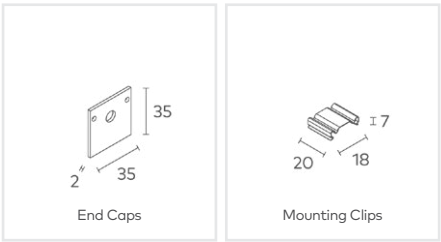

	LED Power	Lumens	SDCM	Beam	Maximum Single Length Run	Cut Increments
1 2 Single CCT	5W/m (24V DC)	249lm/m at 3000K	≤1	110°	20m	6.25mm
	10W/m (24V DC)	498lm/m at 3000K			10m	
	15W/m (24V DC)	747lm/m at 3000K			6.5m	
	20W/m (24V DC)	995lm/m at 3000K			5m	
	30W/m (24V DC)	1494lm/m at 3000K			6.5m	
1 Tunable White (2700K - 6500K)	5W/m (24V DC)	229lm/m at 2700K	≤1	110°	5m	11mm
	10W/m (24V DC)	458lm/m at 2700K				
	15W/m (24V DC)	687lm/m at 2700K				
	20W/m (24V DC)	916lm/m at 2700K				
	30W/m (24V DC)	1374lm/m at 2700K				
RGB	10W/m (24V DC)	161lm/m	N/A	110°	5m	50mm
	15W/m (24V DC)	241lm/m				
	20W/m (24V DC)	321lm/m				
	30W/m (24V DC)	482lm/m				
RGBW(W at 3000K)	15W/m (24V DC)	325lm/m at 3000K	≤2 (3000K)	110°	5m	50mm
	20W/m (24V DC)	433lm/m at 3000K				
	30W/m (24V DC)	650lm/m at 3000K				

Key Information	
Mounting	Surface, Suspended
Finish	☒ Aluminium ☒ Textured Black ☐ Textured White
LED CCT	☒ 2700K ☒ 3000K ☒ 4000K ☒ 2700K-6500K (Tunable White) ☒ RGB ☒ RGBW
Diffuser	Opal Diffuser
Warranty	5 Years

Design	
Product Family	Inter
Material	Powdercoated Aluminium, PC Diffuser
IP Rating	IP20
Class Rating	Class III
Maximum Supply Length	3 metres
Strip Compatibility	Inter IN10 Strip Light
Cable Length	3000mm

Performance	
Lumen Efficacy	Up to 51lm/W
CRI (Ra/R9, Single CCT)	95+ (R9: >90)
Lifetime (Ta 25°C)	>50,000h L90B10
Operating Ambient Temperature	-10°- 35°C

Driver	
Non-Dim	Remote
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote



Available Accessories
PS35 End Cap (Allow 2mm length clearance per end cap)
PS35 Mounting Clip (Allow 2mm width clearance for mounting clips)
Inter Linear 3000mm Suspension Kit

